

Part number:

**HYDROMA**

HYDRAULICKÉ SYSTÉMY

**HIDROMA**  
SYSTEMS

UKŁADY HYDRAULICZNE

**HYDROMA**

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

# DCV mobile valves

*i*

## Table of contents

Technical information .....	2
General specifications .....	4
<b>MONOBLOCK VALVES</b>	
Mobile valves DCV20 .....	5
Mobile valves DCV40 .....	6
Ordering code .....	7
Inlet section .....	8
Working sections .....	10
Working sections .....	22
<b>MODULAR VALVES</b>	
Modular valve DCV30 .....	23
Modular valve DCV50 .....	24
Modular valve DCV80 .....	25
Modular valve DCV MG .....	26
Ordering code .....	27
Inlet section .....	29
Working sections .....	32
Intermediate section .....	47
Outlet section .....	51

© 2015 Brevini Fluid Power S.p.A. All rights reserved. Hydr-App, SAM Hydraulik, Aron, Brevini Hydraulics, BPE Electronics, VPS Brevini, OT Oiltechnology, logos are trademarks or are registered trademarks of Brevini Fluid Power S.p.A. or other companies of the Brevini Group in Italy and other countries.

The technical features supplied in this catalogue are non binding and no legal action can be taken against such material. Brevini Fluid Power will not be held responsible for information and specifications which may lead to error or incorrect interpretations. Given the continuous technical research aimed at improved technical features of our products, Brevini Fluid Power reserves the right to make changes that are considered appropriate without any prior notice. This catalogue cannot be reproduced (in whole or in part) without the prior written consent of Brevini Fluid Power. This catalogue supersedes all previous ones.

Use of the products in this catalogue must comply with the operating limits given in the technical specifications. The type of application and operating conditions must be assessed as normal or in malfunction in order to avoid endangering the safety of people and/or items.

General terms and conditions of sale: see website [www.brevinifluidpower.com](http://www.brevinifluidpower.com).

# Technical information

## INTRODUCTION

Read this instructions carefully before installation. All operations must be carried out by qualified personnel following the instructions.

The user must periodically inspect, based on the conditions of use and the substances used, the presence of corrosion, dirt, the state of wear and correct function of the valves.

## HYDRAULIC FLUID

Use only mineral oil (HL, HLP) according to DIN 51524. Use of other different fluids may damage the good operation of the valve.

## VISCOSITY


The oil viscosity must be in the range of 10 mm<sup>2</sup>/s to 500 mm<sup>2</sup>/s.  
Recommended oil viscosity 46 mm<sup>2</sup>/s (32 mm<sup>2</sup>/s for Cartridge valves)

Table 1: ISO viscosity grades

Viscosity grade	Average kinematic viscosity mm <sup>2</sup> /s @ 40°C	Kinematic-viscosity limits mm <sup>2</sup> /s @ 40°C	
		min.	max.
ISO VG 10	10	9.00	11.0
ISO VG 15	15	13.5	16.5
ISO VG 22	22	19.8	24.2
ISO VG 32	32	28.8	35.2
ISO VG 46	46	41.4	50.6
ISO VG 68	68	61.2	74.8
ISO VG 100	100	90.0	110


= Values used in the chart "Oil viscosity according to temperature"
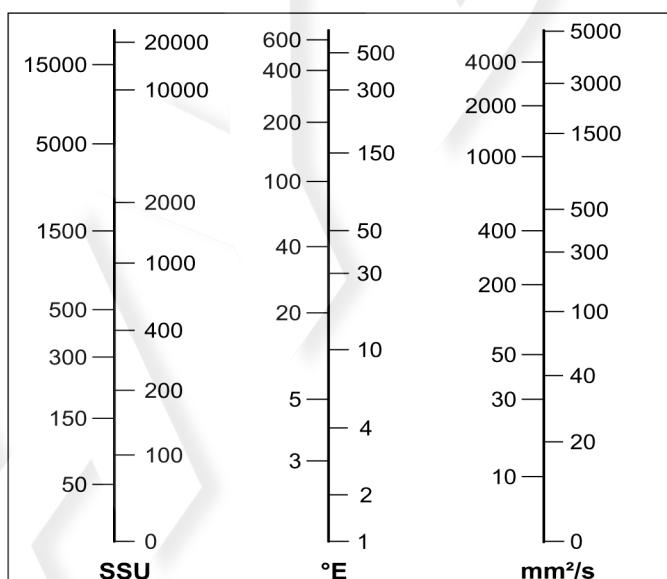
## CONVERSION TABLE SSU / °E / mm<sup>2</sup>/s



## OIL VISCOSITY ACCORDING TO TEMPERATURE

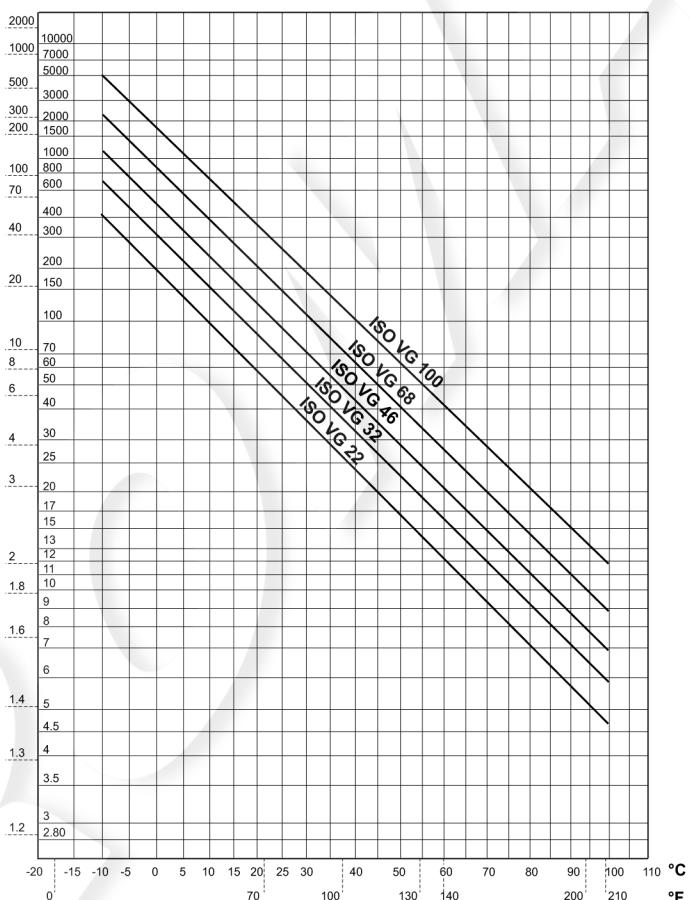°E mm<sup>2</sup>/s



## CONTAMINATION

Oil contamination is the main cause of faults and malfunction in hydraulic systems. Abrasive particles in the fluid erode or block moving parts, leading to system malfunction.

The valves we are offering do not require filtering characteristics any higher than those needed for usual hydraulic components such as pumps, motors, etc.

However, accurate filtering does guarantee reliability and a long life to all the system's hydraulic parts. Reliable performance and long working life for all oil-pressure parts is assured by maintaining the level of fluid contamination within the limits specified in the data sheet of the valve.

Hydraulic fluid must also be cleaned properly before filling the hydraulic circuit, especially when commissioning a new system, as this is when the oil contamination generally peaks due to its flushing effect on the components, and the running-in of the pump.

Maximum contamination level is required on datasheet of the valve according to ISO 4406:1999.

In the following table there is the correspondence between ISO 4406:1999 and old standard NAS 1638 for information purpose:

The standard ISO 4406:1999 defines the contamination level with three numbers that relate with the number of particles of average dimension equal or greater than 4 µm, 6 µm e 14 µm, in 1 ml of fluid.

In following table there is a reference to recommended contamination level and correspondence with old NAS 1638 standard.

# Technical information

Table 2: Recommended contamination level.

Type of system Type of valve	Oil filtration recommendations		
	Cleanliness class recommended		Absolute filtration micron rating (**)
	ISO 4406 : 1999	NAS 1638 (*)	
Systems or components operating at HIGH PRESSURE > 250 bar (3600 psi) HIGH DUTY CYCLE APPLICATIONS Systems or components with LOW dirt tolerance	18 / 16 / 13	7 - 8	5
Systems or components operating at MEDIUM / HIGH PRESSURE Systems and components with moderate dirt tolerance	19 / 17 / 14	9	10
Systems or components operating at LOW PRESSURE < 100 bar (1500 psi) LOW DUTY CYCLE APPLICATIONS Systems and components with GOOD dirt tolerance	20 / 18 / 15	10 - 11	20

\* Contamination class NAS 1638: it is determined by counting the total particles of different size ranges contained in 100 ml of fluid.

\*\* Absolute filtration: it is a characteristic of each filter, it refers the size (in micron) of the largest spherical particle which may pass through the filter.

## WORKING TEMPERATURES

Ambient temperature range: -25°C to +60°C

Fluid temperature range (NBR seals): -25°C to +75°C

Thermal shocks can affect the performance and the expected life of the product, hence it is necessary to protect the product from these conditions.

## SEALS

O-rings made in Acrylonitrile Butadiene (NBR) are normally fitted on the valves. The backup rings that protect the O-rings are also made in NBR, or sometimes PTFE. Both the O-rings and the backup rings are suitable for the working temperatures mentioned above.

For different temperatures, contact our sales department.

## ELECTRICAL POWER SUPPLY

The combination of permanent overvoltage and very hot temperatures can stress the solenoid. Therefore always a good heat dissipation and voltage level has to be assured.

## INSTALLATION

The feet of the valve must always and perfectly rest on a plane surface. Do not tamper the tie rod nuts (control valves) to avoid damaging the distributor.

Observe the size of the fitting threads.

Do not use solvents to avoid damaging the rubber parts of the valves.

## USE AND MAINTENANCE

Observe the functional limits indicated in the technical catalogue

On a periodic basis and based on the conditions of use, check for cleanliness, state of wear or fractures and correct performance of the valve.

If the O-rings are damaged, replace them with those supplied by the manufacturer.

To assure the best working conditions at all time, check the oil and replace it periodically (after the first 100 working hours and then after every 2000 working hours or at least once every year).

Attention: all installation and maintenance intervention must be performed by qualified staff.

## TRANSPORT AND STORAGE

The valve must be handled with care to avoid damage caused by impact, which could compromise its efficiency.

In the case of storage, keep the valves in a dry place and protect against dust and corrosive substances.

When storing for periods of more than 6 months, fill the valve with preserving oils and seal it.

## CONVERSION CHART

Type	SI units		Alternative units		Conversion factor
<b>Force</b>	Newton	(N) [kgm/s <sup>2</sup> ]	Kilogram force	(kgf)	1 kgf = 9.807 N
			pound force	(lbf) [lbf/s <sup>2</sup> ]	1 lbf = 4.448 N
<b>Length</b>	millimeter	(mm) [10 m]	inch	(in)	1 in = 25.4 mm
	meter	(km) [1000 m]	yard	(yd) [3ft]	1 m = 1.0936 yd
	kilometer	(km) [1000 m]	mile	(mile) [1760 yd]	1 mile = 1.609 km
<b>Torque</b>	Newton meter	(Nm)	pound force.feet	(lbf.ft)	1 lbf.ft = 1.356 Nm
<b>Power</b>	kiloWatt (kW)	[1000 Nm/s]	horsepower	(hp)	1 kW = 1.341 hp
			metric horsepower	(CV)	1 kW = 1.36 CV
<b>Pressure</b>	MegaPascal	(MPa) [ N/mm <sup>2</sup> ]	bar		1 MPa = 10 bar
			psi (lbf/in <sup>2</sup> )		1 MPa = 145 psi
			ton/f/in <sup>2</sup>		1 ton/f/in <sup>2</sup> = 15.45 MPa
<b>Flow rate</b>	liter/min	(l/min)	UK gal/min		1 UK gal/min = 4.546 l/min
			US gal/min		1 US gal/min = 3.785 l/min
<b>Temperature</b>	Degrees Celsius	(°C)	Farenheit	(°F)	1°F = 1.8 °C+32

# General specifications

## MAIN CHARACTERISTICS

All the production VPS Brevini want to be a high quality production. Infact the project of each single valve and the choice of the better materials, machined with the highest tecnologies and under the strongest controls in each process, allow highest characteristics and numerous applications described in the following pages. Furthermore:

1. all the casting are made in Shell-Moulding, in special graphite cast iron. This kind of cast iron is in higt resistance, and it allows to have, with the same external overall dimensions, bigger internal gallery, and lower pressure drops;
2. all spools are made in high resistance steel, nichel plated, radial balanced and with special notches in order to have a better sensibility;
3. all springs are made in high resistance steel. Pressure setting springs are pressed before testing;
4. max tolerance of spool housing is 2 micron;
5. internal leakage at 120 bar, 50° C and oil 30 cSt is beetwen 1 and 2 cm<sup>3</sup>/min, depending from the kind of spool and the kind of valve.

## GENERAL CONDITION OF WORK

Working temperature	-25 °C ÷ +75 °C
Max back pressure	20 bar (290 PSI)
Max contamination level	NAS 1638 class 9 (19/16 ISO-4406)
Fluid oil	Mineral oil
Kinematic viscosity	10 ÷ 460 mm <sup>2</sup> /s
Filtration	$\beta_{12} \geq 75$

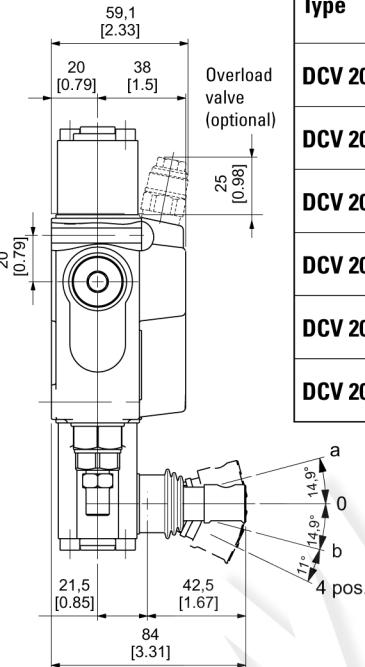
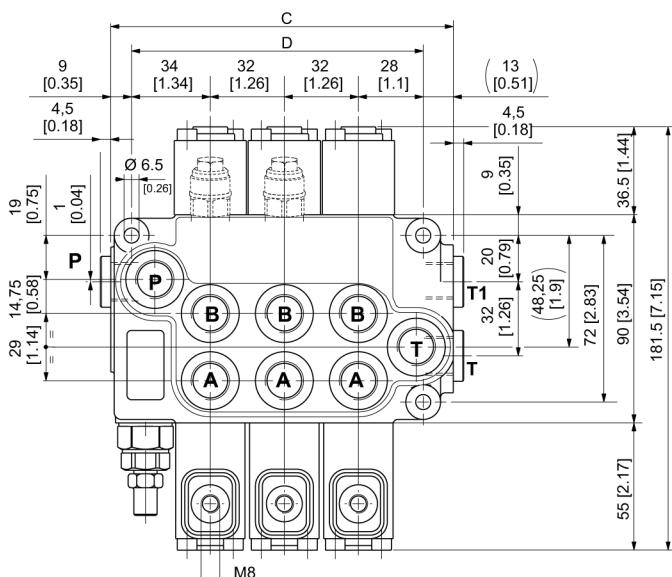
Spool are available with different metering, marine protected, Viton® seals, special spring, etc.

		MONOBLOCK VALVES		MODULAR VALVES			
		DCV 20	DCV 40	DCV 30	DCV 50	DCV 80	DCV MG
Features	Max section	N.o	6	6	12	12	12
	Max flow	l/min	40	70	40	70	120
		GPM	10.6	18.5	10.6	18.5	31.7
	Max pressure	BAR	400	400	350	350	350
Circuit	psi	5800	5800	5075	5075	5075	5075
	Parallel		●	●	●	●	●
	Series			●	●	●	●
Main relief valve	Tandem			●	●	●	●
	Direct		●	●	●		
	Piloted				●	●	●
Port relief valves	Overload		●	●	●	●	●
	Anti cavitation			●	●	●	●
	Combined			●	●	●	●
Threads	BSP	3/8"	1/2"	3/8"	1/2"	3/4"	1" - 3/4" <sup>(1)</sup>
			3/8" <sup>(1)</sup>			1/2" <sup>(1)</sup>	
	SAE	9/16" - 18UNF (SAE 6)	3/4" - 16UNF (SAE 8)	9/16" - 18UNF (SAE 6)	7/8" - 14UNF (SAE 10)	7/8" - 14UNF (SAE 10)	1" 5/16 - 12UNF (SAE 12) <sup>(1)</sup>
			7/8" 14UNF (SAE 10) <sup>(1)</sup>			1" 5/16 - 12UNF (SAE 12) <sup>(1)</sup>	
Spool stroke	A ÷ B	mm	± 5	± 5	± 5	± 5	± 7
		inch	± 0.20	± 0.20	± 0.20	± 0.20	± 0.31
	4a position	mm	- 3.5	- 5	- 3.5	- 5	- 5.5
		inch	- 0.14	- 0.20	- 0.14	- 0.20	- 0.22
	Series	mm	—	—	± 4.5	± 4.5	± 8
		inch	—	—	± 0.18	± 0.18	± 0.31

(1) Threads available on request

# Mobile valves DCV20

## OVERALL DIMENSIONS



Type	C mm [inch]	D mm [inch]	Weight kg [lb]
DCV 20/1	80 [3.15]	62 [2.44]	2.10 [4.62]
DCV 20/2	112 [4.41]	94 [3.70]	3.25 [7.15]
DCV 20/3	144 [5.67]	126 [4.96]	4.35 [9.57]
DCV 20/4	176 [6.93]	158 [6.22]	5.45 [11.99]
DCV 20/5	208 [8.19]	190 [7.48]	6.55 [14.41]
DCV 20/6	240 [9.45]	222 [8.74]	7.65 [16.83]

MONOBLOCK


## CHARACTERISTIC PRESSURE DROP FLOW CURVES
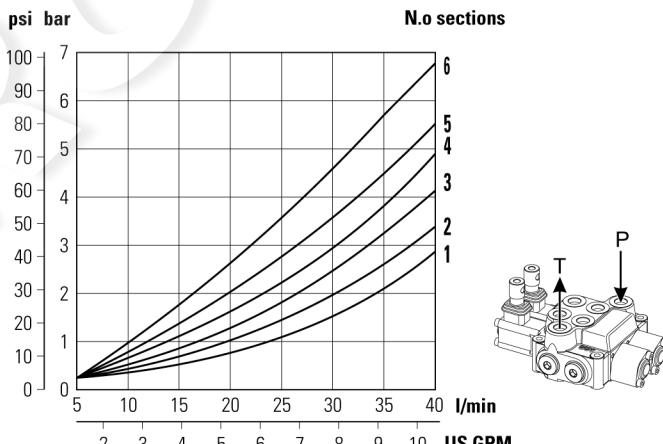
### Technical data


Flow	l/min	40
	GPM	10.6
Max pressure	BAR	400
	psi	5800
Oil viscosity	CST	30
Oil temperature	°C	50

Metering curves are different for each type of spool.  
Therefore particular curves are supplied on request


### Inlet pressure drop between inlet port (P) and outlet port (T)



### Inlet pressure drop between inlet port (P) and work ports (A/B)

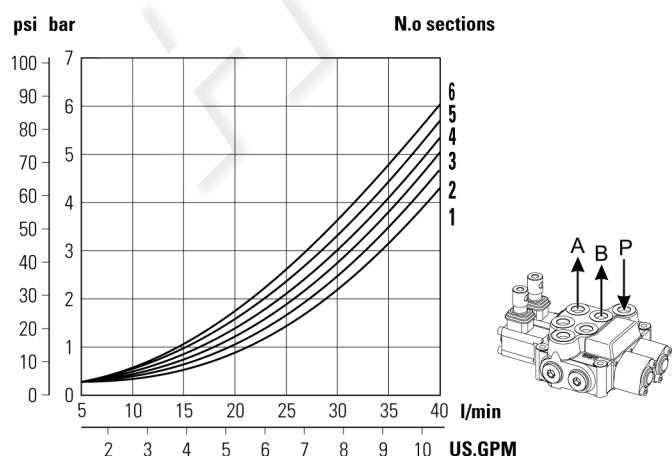


### Inlet pressure drop between work ports (A/B) and outlet port (T)

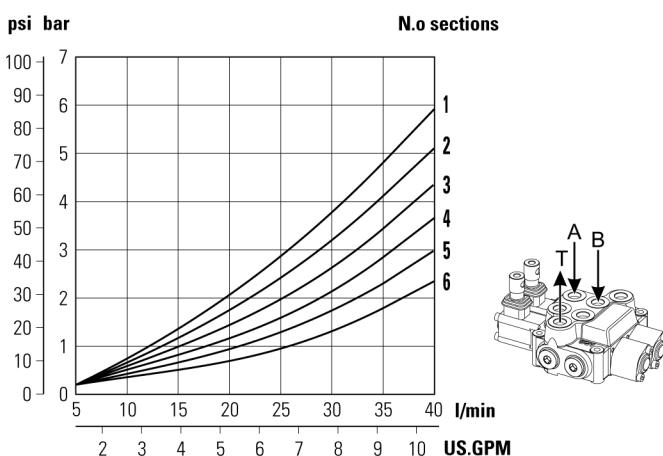

# Mobile valves DCV40

**MONOBLOCK**
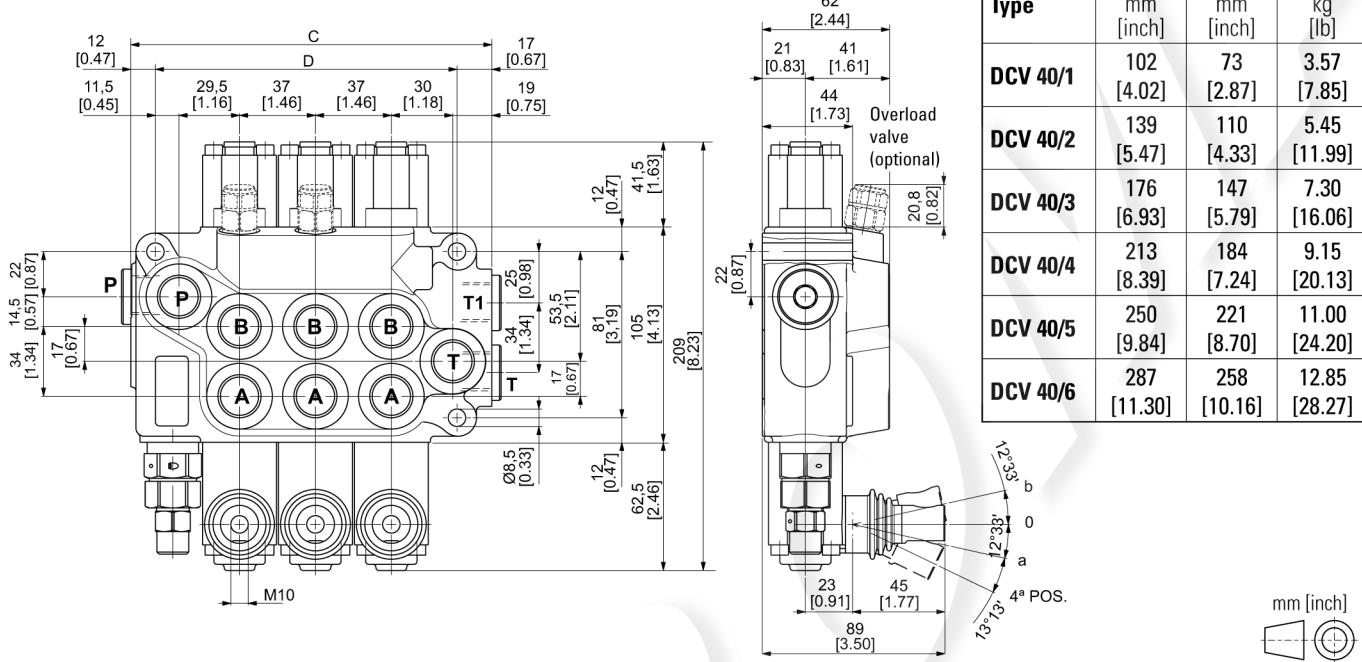
## OVERALL DIMENSIONS




## CHARACTERISTIC PRESSURE DROP FLOW CURVES

### DCV 40 technical data


Flow	l/min	70
	GPM	18.5
Max pressure	BAR	400
	psi	5800
Oil viscosity	CST	30
Oil temperature	°C	50

Metering curves are different for each typee of spool.  
Therefore particular curves are supplied on request

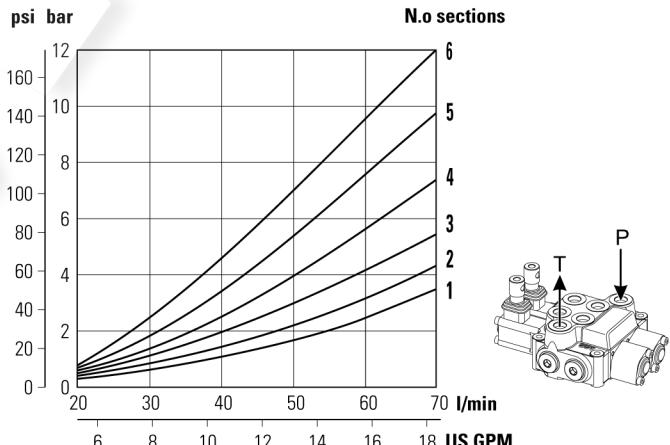
### Inlet pressure drop between inlet port (P) and outlet port (T)



### Inlet pressure drop between inlet port (P) and work ports (A/B)

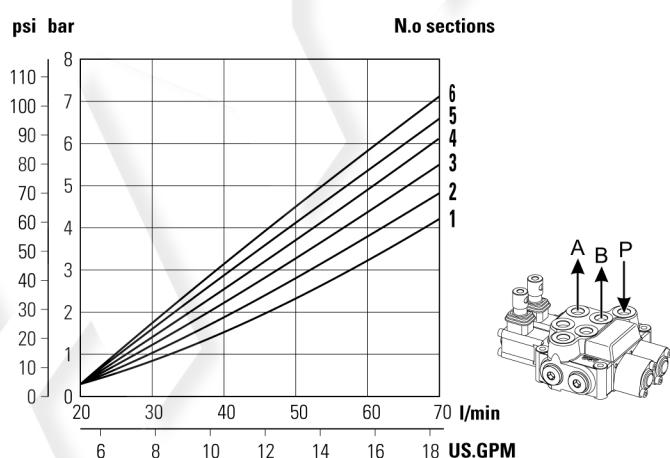

### Inlet pressure drop between work ports (A/B) and outlet port (T)


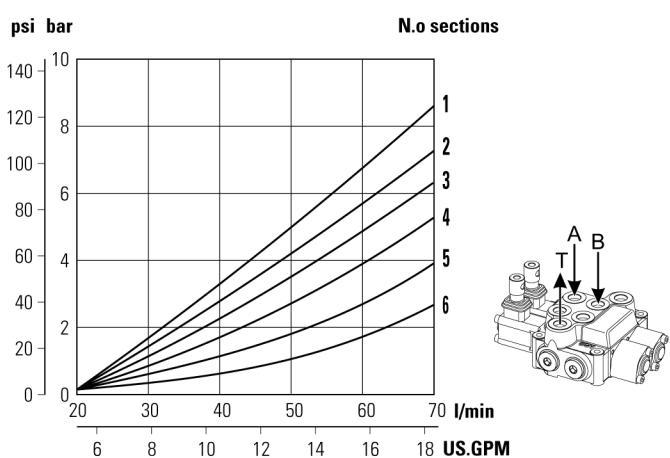


# Ordering code

Description	Page	Model		Inlet section		Working sections (repeat for any section)					Outlet section		Threads
		DCV ** / *	IS*	***	(***)	ST**	CS**	D**	V**(***)	W*	Xn	U*	F*
Size: DCV20 DCV40	5-6												
N.o working sections													
Inlet type	8												
Valves arrangement	9												
Main relief valve setting	9												
Spools	10												
Spool control handle side	11												
Spool control cap side	16												
Service port valves (1)	21												
Overload valve setting	21												
Hand lever	21												
Working section repeated for n. times	21												
Outlet	22												
Threads	22												


----- Optional fields
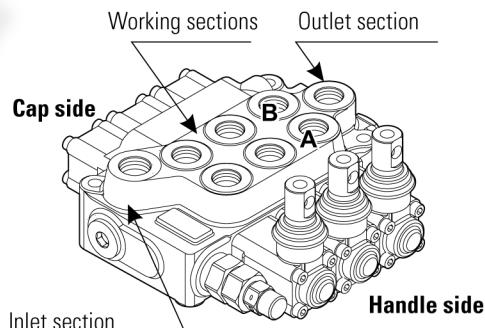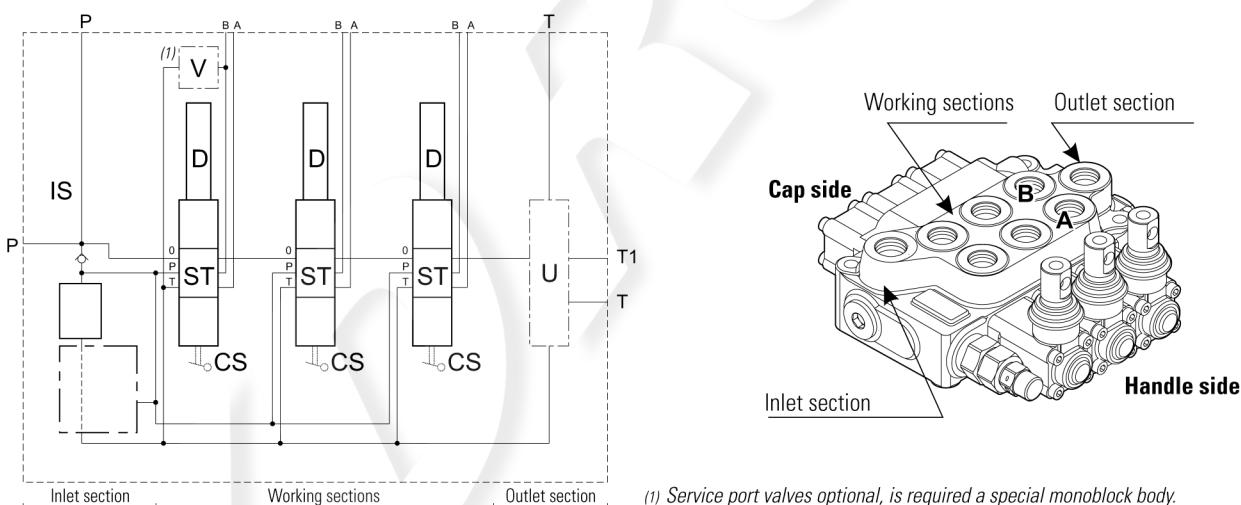
## HYDRAULIC SCHEME



(1) Service port valves optional, is required a special monoblock body.


## ORDERING CODE EXAMPLE

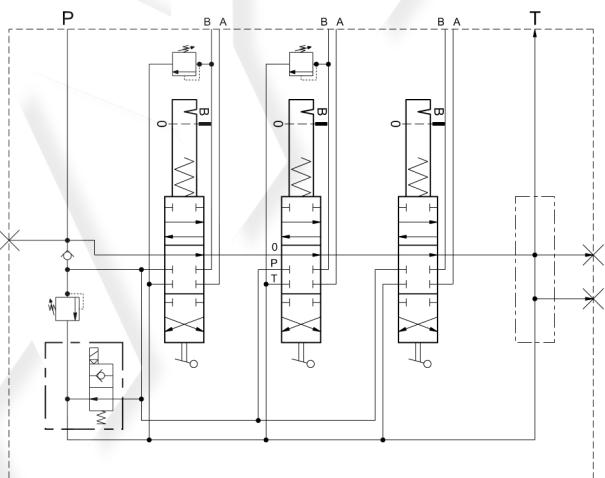





- DCV40/3** - DCV40 3 sections monoblock
- IST** - Top inlet
- 004** - Direct main relief valve + Solenoid dump valve 24V N. Open
- (200)** - Valve setting 200 BAR
- ST1** - Spool, 3 position, double acting
- CS1** - Spool control handle side
- D4** - Spool control cap side, 3 pos. spring centred spool, detent in "b"
- VB1(150)** - Overload valve in position "B" - Setting 150 bar
- W2** - Standard handle lever
- X2** - Working section repeated for n. 2 times
- ST1** - Spool, 3 position, double acting
- CS1** - Spool control handle side
- D4** - Spool control cap side, 3 pos. spring centred spool, detent in "b"
- W2** - Standard handle lever
- US** - Top outlet
- F4** - 1/2" BSP threads

# MONOBLOCK
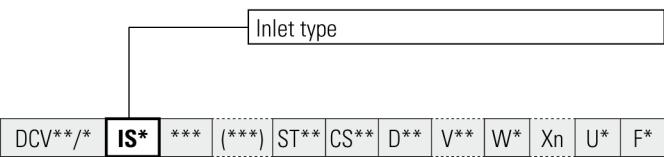
## Inlet section




### **IS\*** Inlet type

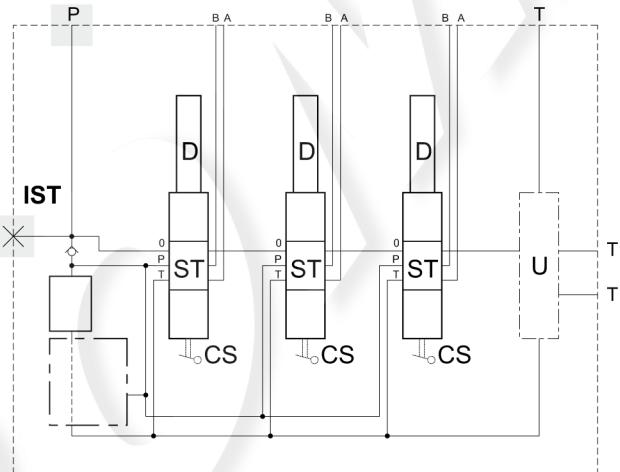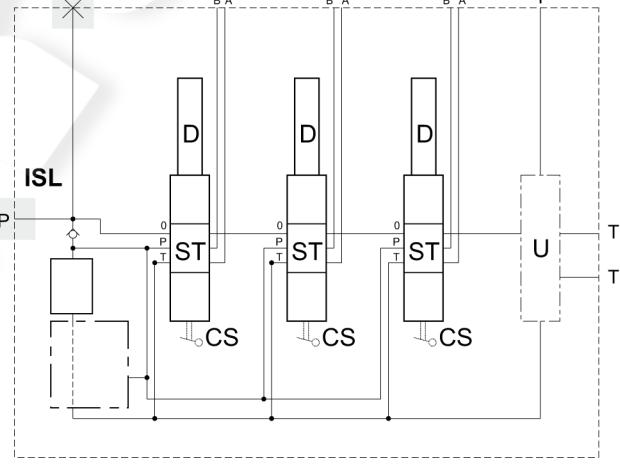**	Description	Drawing
<b>IST (1)</b>	Top inlet (standard)	 
<b>ISL (2)</b>	Side inlet	 

(1) RIGHT inlet section with top inlet (IDT). On request, contact our sales department.

(2) RIGHT inlet section with side inlet (IDL). On request, contact our sales department.





# Inlet section

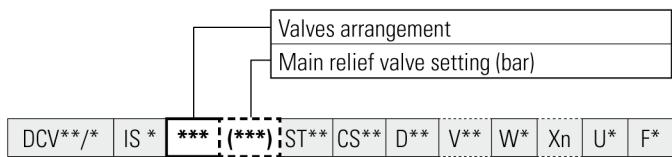

**Valves arrangements and main relief valve setting**

***	(***)	Arrangements		
		A*	B*	D*
001	(1)	A1	—	D0
002	(1)	A1	B6	D0
003	(1)	A1	B7	D0
004	(1)	A1	B8	D0
005	(1)	A1	B9	D0
006	(1)	A1	B10	D0
007	(1)	A1	B11	D0
008	(1)	A1	B12	D0
009	(1)	A1	B13	D0
010	(1)	A1	—	D15
011	—	A14	—	D0
012	—	A14	—	D15
013	—	A14	B6	D0
014	—	A14	B7	D0
015	—	A14	B8	D0
016	—	A14	B9	D0
017	—	A14	B10	D0
018	—	A14	B11	D0
019	—	A14	B12	D0
020	—	A14	B13	D0

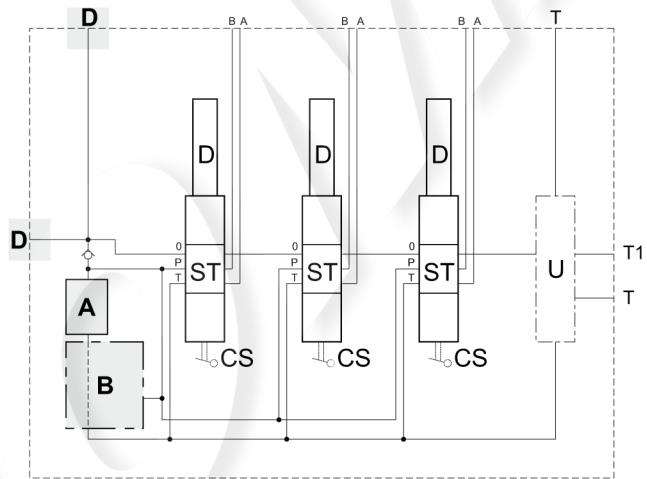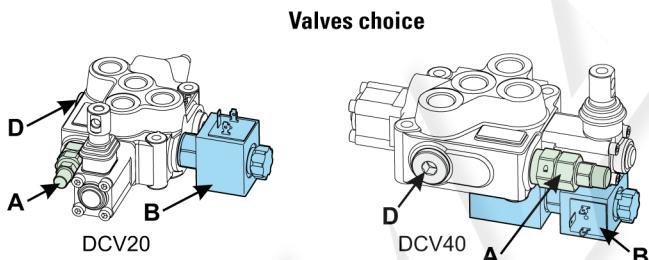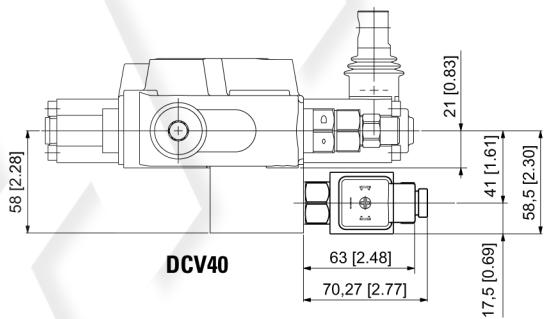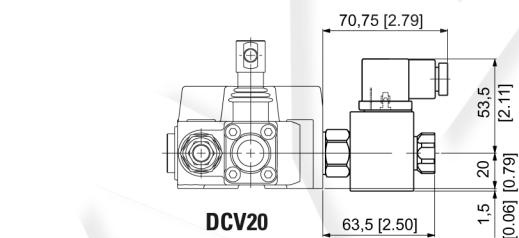(1) Specify pressure relief valve setting (from 20 to 400 bar)





<b>A1</b>	Direct main relief valve	
<b>A14</b>	Valve seat with plug	
<b>B6</b> (2)	Solenoid dump valve 12V work NORMALLY OPEN	
<b>B8</b> (2)	Solenoid dump valve 24V work NORMALLY OPEN	
<b>B10</b> (2)	Solenoid dump valve 26V work NORMALLY OPEN	
<b>B12</b> (2)	Solenoid dump valve 30V work NORMALLY OPEN	
<b>B7</b> (2)	Solenoid dump valve 12V work NORMALLY CLOSED	
<b>B9</b> (2)	Solenoid dump valve 24V work NORMALLY CLOSED	
<b>B11</b> (2)	Solenoid dump valve 26V work NORMALLY CLOSED	
<b>B13</b> (2)	Solenoid dump valve 30V work NORMALLY CLOSED	
<b>D0</b>	Plug - Standard (position selected with IST or ISL)	
<b>D15</b>	Pressure gauge connection (replace the plug selected with IST or ISL)	

(2) Include block (DCV40) and special monoblock body

(3) Solenoid features

	12V	24V	26V
Resistance ohm ( $\pm 7\%$ )	8.7	32	37.5
Connector	DIN 43650 ISO 4400		
Protection degree	IP65		
Ambient temperature	-30 +60 °C		
Power	20 W		

# Working sections

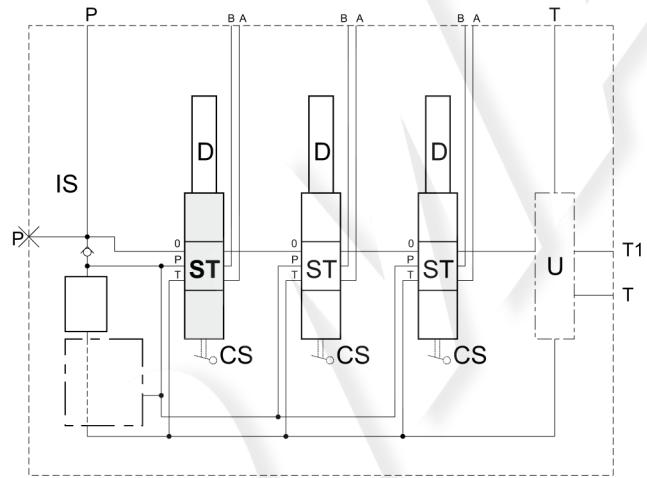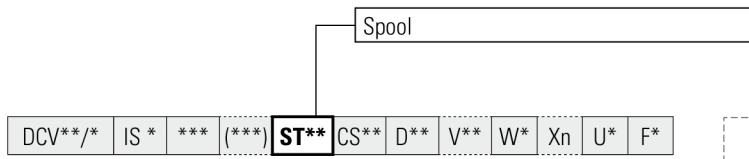


## ST\*\* Spool

**	Description	Symbol
<b>ST1</b> <b>ST1G</b> (1)	3 position, double acting	
<b>ST2</b>	3 positions, double acting, - Lc blocked - A and B open	
<b>ST3</b>	3 positions, double acting, - Lc blocked - A and B blocked	
<b>ST4</b> <b>ST4G</b> (1)	3 positions, double acting, - A and B open	
<b>ST5</b> <b>ST5G</b> (1)	3 positions, double acting, - A open - B blocked	
<b>ST6</b> <b>ST6G</b> (1)	3 positions, double acting, - A blocked - B open	
<b>ST7</b>	3 positions, single acting in A	
<b>ST8</b>	3 positions, single acting in B	

**	Description	Symbol
<b>ST9</b>	3 positions, single acting in A - A open	
<b>ST10</b>	3 positions, single acting in B - B open	
<b>ST11</b>	3 positions, double acting regenerative in A (not standard)	
<b>ST12</b>	4 positions, double acting with 4th float position	
<b>ST23</b>	2 positions with function dead man (unactivated) in "a" position ; working position in "0"	
<b>ST24</b>	2 positions with function dead man (unactivated) in "b" position ; working position in "0"	
<b>ST27</b>	2 positions with function dead man (unactivated) in "0" position ; working position in "b"	
<b>ST28</b>	2 positions with function dead man (unactivated) in "0" position ; working position in "a"	

(1) **STG** = Extra metering
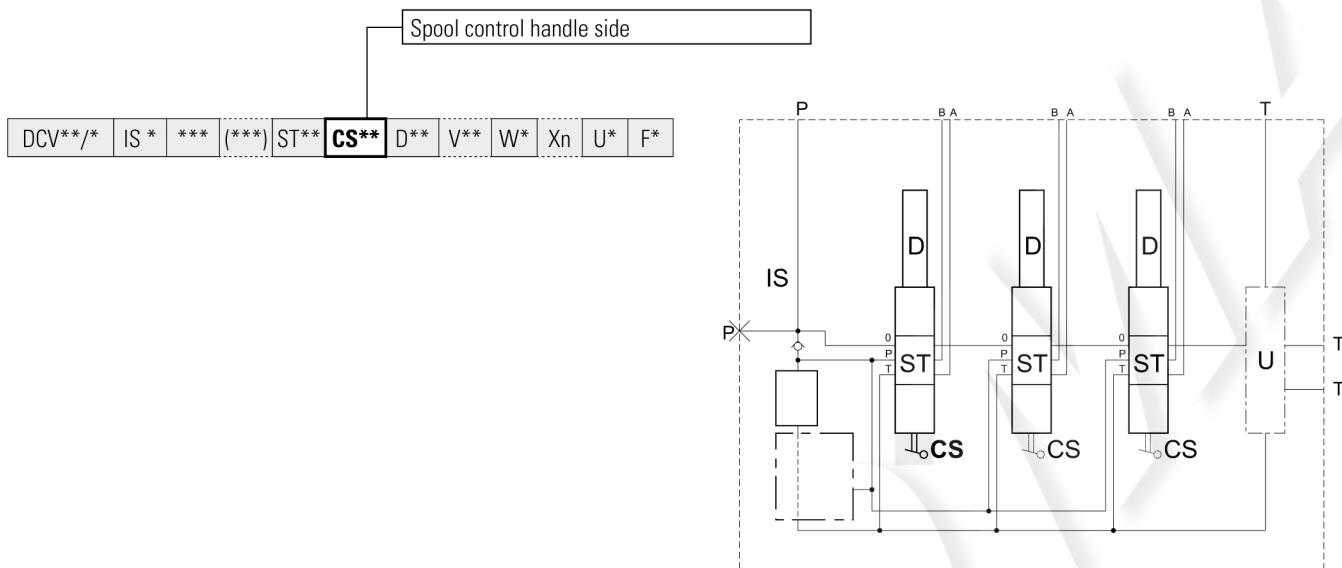
# Working sections



**MONOBLOCK**






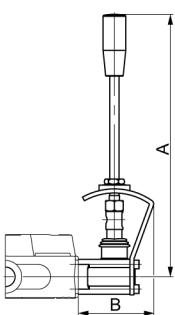
## CS\*\* Spool control handle side

**	Description	Drawing																	
<b>CS1 CSA1 (1)</b>	Standard handle	 	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> <th>C</th> </tr> <tr> <th></th> <th>mm   inch</th> <th>mm   inch</th> <th>mm   inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>64   2.52</td> <td>M8</td> <td>55   2.17   —   —</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62.5   2.46</td> <td>M10</td> <td>62.5   2.46   67.5   2.66</td> </tr> </tbody> </table>		A	B	C		mm   inch	mm   inch	mm   inch	<b>DCV 20</b>	64   2.52	M8	55   2.17   —   —	<b>DCV 40</b>	62.5   2.46	M10	62.5   2.46   67.5   2.66
	A	B	C																
	mm   inch	mm   inch	mm   inch																
<b>DCV 20</b>	64   2.52	M8	55   2.17   —   —																
<b>DCV 40</b>	62.5   2.46	M10	62.5   2.46   67.5   2.66																
<b>CS2 CSA2 (1)</b>	Handle at 180°	 	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> <th>C</th> </tr> <tr> <th></th> <th>mm   inch</th> <th>mm   inch</th> <th>mm   inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>64   2.52</td> <td>M8</td> <td>55   2.17   —   —</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62.5   2.46</td> <td>M10</td> <td>62.5   2.46   67.5   2.66</td> </tr> </tbody> </table>		A	B	C		mm   inch	mm   inch	mm   inch	<b>DCV 20</b>	64   2.52	M8	55   2.17   —   —	<b>DCV 40</b>	62.5   2.46	M10	62.5   2.46   67.5   2.66
	A	B	C																
	mm   inch	mm   inch	mm   inch																
<b>DCV 20</b>	64   2.52	M8	55   2.17   —   —																
<b>DCV 40</b>	62.5   2.46	M10	62.5   2.46   67.5   2.66																
<b>CS3</b>	Without handle	 	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> <th>C</th> </tr> <tr> <th></th> <th>mm   inch</th> <th>mm   inch</th> <th>mm   inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>41   1.61</td> <td>12   0.47</td> <td>6   0.24</td> </tr> <tr> <td><b>DCV 40</b></td> <td>50   1.97</td> <td>17   0.67</td> <td>9   0.35</td> </tr> </tbody> </table>		A	B	C		mm   inch	mm   inch	mm   inch	<b>DCV 20</b>	41   1.61	12   0.47	6   0.24	<b>DCV 40</b>	50   1.97	17   0.67	9   0.35
	A	B	C																
	mm   inch	mm   inch	mm   inch																
<b>DCV 20</b>	41   1.61	12   0.47	6   0.24																
<b>DCV 40</b>	50   1.97	17   0.67	9   0.35																
<b>CS4</b>	Hydraulic control - Max pilot pressure 35 bar 508 psi	 	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm   inch</th> <th>mm   inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>59   2.32</td> <td>1/4" BSP</td> </tr> <tr> <td><b>DCV 40</b></td> <td>68   2.68</td> <td>1/4" BSP</td> </tr> </tbody> </table>		A	B		mm   inch	mm   inch	<b>DCV 20</b>	59   2.32	1/4" BSP	<b>DCV 40</b>	68   2.68	1/4" BSP				
	A	B																	
	mm   inch	mm   inch																	
<b>DCV 20</b>	59   2.32	1/4" BSP																	
<b>DCV 40</b>	68   2.68	1/4" BSP																	
<b>CS53</b>	Hydraulic lever control	 	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> <tr> <th></th> <th>mm   inch</th> <th>mm   inch</th> <th>mm   inch</th> <th>mm   inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>59   2.32</td> <td>109   4.29</td> <td>1/4" BSP</td> <td>64   2.52</td> </tr> </tbody> </table>		A	B	C	D		mm   inch	mm   inch	mm   inch	mm   inch	<b>DCV 20</b>	59   2.32	109   4.29	1/4" BSP	64   2.52	
	A	B	C	D															
	mm   inch	mm   inch	mm   inch	mm   inch															
<b>DCV 20</b>	59   2.32	109   4.29	1/4" BSP	64   2.52															

(1) CSA. = Aluminium version (only DCV40)

# Working sections

## CS\*\* Spool control handle side

**	Description	Drawing													
CS5 CSA5 (1)	Safety handle locked in neutral position	 <p>B   0   A</p>	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm inch</th> <th>mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 40</b></td> <td>220 8.66</td> <td>77 3.03</td> </tr> </tbody> </table>		A	B		mm inch	mm inch	<b>DCV 20</b>	200 7.87	73 2.87	<b>DCV 40</b>	220 8.66	77 3.03
	A	B													
	mm inch	mm inch													
<b>DCV 20</b>	200 7.87	73 2.87													
<b>DCV 40</b>	220 8.66	77 3.03													
CS6 CSA6 (1)	Safety handle locked in position "a"	 <p>B   0   A</p>	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm inch</th> <th>mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 40</b></td> <td>220 8.66</td> <td>77 3.03</td> </tr> </tbody> </table>		A	B		mm inch	mm inch	<b>DCV 20</b>	200 7.87	73 2.87	<b>DCV 40</b>	220 8.66	77 3.03
	A	B													
	mm inch	mm inch													
<b>DCV 20</b>	200 7.87	73 2.87													
<b>DCV 40</b>	220 8.66	77 3.03													
CS7 CSA7 (1)	Security handle locked in position "b"	 <p>B   0   A</p>	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm inch</th> <th>mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 40</b></td> <td>220 8.66</td> <td>77 3.03</td> </tr> </tbody> </table>		A	B		mm inch	mm inch	<b>DCV 20</b>	200 7.87	73 2.87	<b>DCV 40</b>	220 8.66	77 3.03
	A	B													
	mm inch	mm inch													
<b>DCV 20</b>	200 7.87	73 2.87													
<b>DCV 40</b>	220 8.66	77 3.03													
CS8 CSA8 (1)	Security handle locked in position "a" and "b"	 <p>B   0   A</p>	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm inch</th> <th>mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 40</b></td> <td>220 8.66</td> <td>77 3.03</td> </tr> </tbody> </table>		A	B		mm inch	mm inch	<b>DCV 20</b>	200 7.87	73 2.87	<b>DCV 40</b>	220 8.66	77 3.03
	A	B													
	mm inch	mm inch													
<b>DCV 20</b>	200 7.87	73 2.87													
<b>DCV 40</b>	220 8.66	77 3.03													
CS9 CSA9 (1)	Security handle locked in 4th position	 <p>B   0   A</p>	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm inch</th> <th>mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 40</b></td> <td>220 8.66</td> <td>77 3.03</td> </tr> </tbody> </table>		A	B		mm inch	mm inch	<b>DCV 20</b>	200 7.87	73 2.87	<b>DCV 40</b>	220 8.66	77 3.03
	A	B													
	mm inch	mm inch													
<b>DCV 20</b>	200 7.87	73 2.87													
<b>DCV 40</b>	220 8.66	77 3.03													
CS40 CSA40 (1)	Any positions detented lever	 <p>B   0   A</p>	<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th></th> <th>mm inch</th> <th>mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 40</b></td> <td>270 10.62</td> <td>77 3.03</td> </tr> </tbody> </table>		A	B		mm inch	mm inch	<b>DCV 40</b>	270 10.62	77 3.03			
	A	B													
	mm inch	mm inch													
<b>DCV 40</b>	270 10.62	77 3.03													

(1) **CSA.** = Aluminium version (only DCV40)

# Working sections

## CS\*\* Spool control handle side

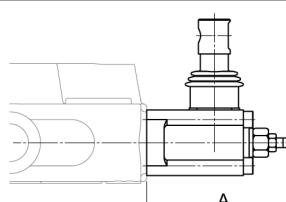
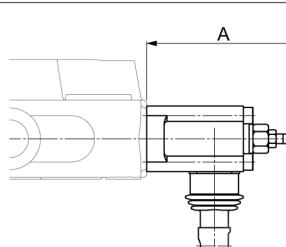
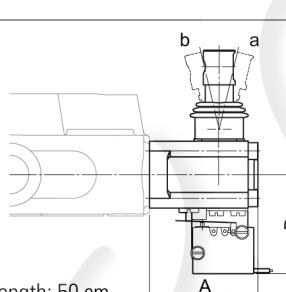
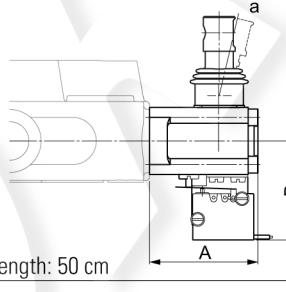
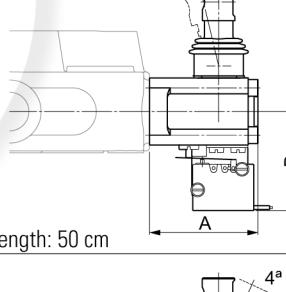
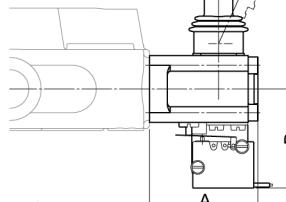
**	Description	Drawing																		
CS10 (CX) (1)	Cloche control with fulcrum on upstream section		<table border="1"> <thead> <tr> <th></th> <th>L</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>280</td> <td>11.02</td> </tr> <tr> <td><b>DCV 40</b></td> <td>285</td> <td>11.22</td> </tr> </tbody> </table>		L	mm	inch	<b>DCV 20</b>	280	11.02	<b>DCV 40</b>	285	11.22							
	L																			
mm	inch																			
<b>DCV 20</b>	280	11.02																		
<b>DCV 40</b>	285	11.22																		
CS11 (CX) (1)	Cloche control with fulcrum on downstream section		<table border="1"> <thead> <tr> <th></th> <th>L</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>280</td> <td>11.02</td> </tr> <tr> <td><b>DCV 40</b></td> <td>285</td> <td>11.22</td> </tr> </tbody> </table>		L	mm	inch	<b>DCV 20</b>	280	11.02	<b>DCV 40</b>	285	11.22							
	L																			
mm	inch																			
<b>DCV 20</b>	280	11.02																		
<b>DCV 40</b>	285	11.22																		
CS12 (CX) (1)	Cloche control with fulcrum turned 180° on the downstream section		<table border="1"> <thead> <tr> <th></th> <th>L</th> <th>D</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>280</td> <td>11.02</td> <td>20</td> <td>0.79</td> </tr> <tr> <td><b>DCV 40</b></td> <td>285</td> <td>11.22</td> <td>20</td> <td>0.79</td> </tr> </tbody> </table>		L	D	mm	inch	mm	inch	<b>DCV 20</b>	280	11.02	20	0.79	<b>DCV 40</b>	285	11.22	20	0.79
	L	D																		
mm	inch	mm	inch																	
<b>DCV 20</b>	280	11.02	20	0.79																
<b>DCV 40</b>	285	11.22	20	0.79																
CS13 (CX) (1)	Cloche control with fulcrum turned 180° on the upstream section		<table border="1"> <thead> <tr> <th></th> <th>L</th> <th>D</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>280</td> <td>11.02</td> <td>20</td> <td>0.79</td> </tr> <tr> <td><b>DCV 40</b></td> <td>285</td> <td>11.22</td> <td>20</td> <td>0.79</td> </tr> </tbody> </table>		L	D	mm	inch	mm	inch	<b>DCV 20</b>	280	11.02	20	0.79	<b>DCV 40</b>	285	11.22	20	0.79
	L	D																		
mm	inch	mm	inch																	
<b>DCV 20</b>	280	11.02	20	0.79																
<b>DCV 40</b>	285	11.22	20	0.79																
CS14	Flexible cable control		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>104</td> <td>4.09</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV 40</b></td> <td>106</td> <td>4.17</td> <td>(2)</td> <td>(2)</td> </tr> </tbody> </table>		A	B	mm	inch	mm	inch	<b>DCV 20</b>	104	4.09	(2)	(2)	<b>DCV 40</b>	106	4.17	(2)	(2)
	A	B																		
mm	inch	mm	inch																	
<b>DCV 20</b>	104	4.09	(2)	(2)																
<b>DCV 40</b>	106	4.17	(2)	(2)																

(1) (CX) code required to use on 2th section

(2) Length cable and control, contact our commercial dept

# Working sections






## CS\*\* Spool control handle side

**	Description	Drawing																											
<b>CS15 CSA15 (1)</b>	Spool stroke adjustment in "b"	 	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>78</td> <td>3.07</td> </tr> <tr> <td><b>DCV 40</b></td> <td>83.5</td> <td>3.28</td> </tr> </tbody> </table>		<b>A</b>			mm	inch	<b>DCV 20</b>	78	3.07	<b>DCV 40</b>	83.5	3.28														
	<b>A</b>																												
	mm	inch																											
<b>DCV 20</b>	78	3.07																											
<b>DCV 40</b>	83.5	3.28																											
<b>CS16 CSA16 (1)</b>	Spool stroke adjustment in "b", handle at 180°	 	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>78</td> <td>3.07</td> </tr> <tr> <td><b>DCV 40</b></td> <td>83.5</td> <td>3.28</td> </tr> </tbody> </table>		<b>A</b>			mm	inch	<b>DCV 20</b>	78	3.07	<b>DCV 40</b>	83.5	3.28														
	<b>A</b>																												
	mm	inch																											
<b>DCV 20</b>	78	3.07																											
<b>DCV 40</b>	83.5	3.28																											
<b>CS17 CSA17 (1)</b>	Standard handle with microswitch in "a" and "b"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	  <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS17</th> <th>mm</th> <th>CSA17</th> <th>mm</th> <th>inch</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS17	mm	CSA17	mm	inch	inch	<b>DCV 20</b>	55	2.17	—	—	50.5	1.99	<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03
	<b>A</b>		<b>B</b>																										
	CS17	mm	CSA17	mm	inch	inch																							
<b>DCV 20</b>	55	2.17	—	—	50.5	1.99																							
<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03																							
<b>CS18 CSA18 (1)</b>	Standard handle with microswitch in "a"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	  <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS18</th> <th>mm</th> <th>CSA18</th> <th>mm</th> <th>inch</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS18	mm	CSA18	mm	inch	inch	<b>DCV 20</b>	55	2.17	—	—	50.5	1.99	<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03
	<b>A</b>		<b>B</b>																										
	CS18	mm	CSA18	mm	inch	inch																							
<b>DCV 20</b>	55	2.17	—	—	50.5	1.99																							
<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03																							
<b>CS19 CSA19 (1)</b>	Standard handle with microswitch in "b"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	  <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS19</th> <th>mm</th> <th>CSA19</th> <th>mm</th> <th>inch</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS19	mm	CSA19	mm	inch	inch	<b>DCV 20</b>	55	2.17	—	—	50.5	1.99	<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03
	<b>A</b>		<b>B</b>																										
	CS19	mm	CSA19	mm	inch	inch																							
<b>DCV 20</b>	55	2.17	—	—	50.5	1.99																							
<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03																							
<b>CS20 CSA20 (1)</b>	Standard handle with microswitch in 4th position  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	  <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS20</th> <th>mm</th> <th>CSA20</th> <th>mm</th> <th>inch</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS20	mm	CSA20	mm	inch	inch	<b>DCV 20</b>	55	2.17	—	—	50.5	1.99	<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03
	<b>A</b>		<b>B</b>																										
	CS20	mm	CSA20	mm	inch	inch																							
<b>DCV 20</b>	55	2.17	—	—	50.5	1.99																							
<b>DCV 40</b>	62.5	2.46	67.5	2.66	51.5	2.03																							

(1) **CSA.** = Aluminium version (only DCV40)


# Working sections
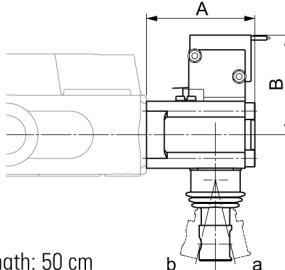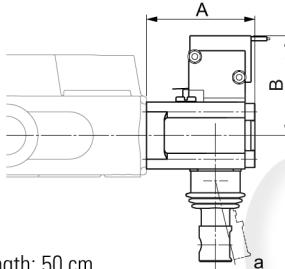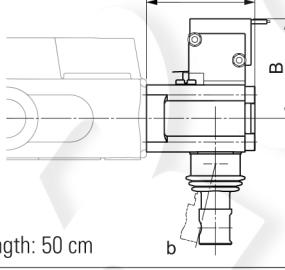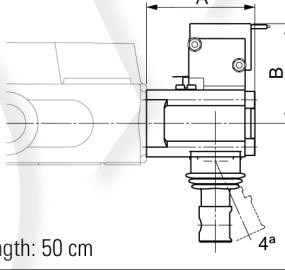
## CS\*\* Spool control handle side

**	Description	Drawing																										
CS21 (1)	<p>Handle 180° with microswitch in "a" and "b"</p> <p>Protection degree: IP67</p> <p>Nominal rating: 0.1 ÷ 10 A / 250VAC</p> <p>Minimum rating: 1 mA / 4 VDC</p> <p>Operating temperature: -20 ÷ +85°C</p> 	 <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>CS21</th> <th>CSA21</th> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>DCV 20</td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td>DCV 40</td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		A		B		CS21	CSA21	mm	inch	mm	inch	DCV 20	55	2.17	—	—	50.5	1.99	DCV 40	62.5	2.46	67.5	2.66	51.5	2.03
	A		B																									
	CS21	CSA21	mm	inch	mm	inch																						
DCV 20	55	2.17	—	—	50.5	1.99																						
DCV 40	62.5	2.46	67.5	2.66	51.5	2.03																						
CS22 (1)	<p>Handle 180° with microswitch in "a"</p> <p>Protection degree: IP67</p> <p>Nominal rating: 0.1 ÷ 10 A / 250VAC</p> <p>Minimum rating: 1 mA / 4 VDC</p> <p>Operating temperature: -20 ÷ +85°C</p> 	 <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>CS22</th> <th>CSA22</th> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>DCV 20</td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td>DCV 40</td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		A		B		CS22	CSA22	mm	inch	mm	inch	DCV 20	55	2.17	—	—	50.5	1.99	DCV 40	62.5	2.46	67.5	2.66	51.5	2.03
	A		B																									
	CS22	CSA22	mm	inch	mm	inch																						
DCV 20	55	2.17	—	—	50.5	1.99																						
DCV 40	62.5	2.46	67.5	2.66	51.5	2.03																						
CS23 (1)	<p>Handle 180° with microswitch in "b"</p> <p>Protection degree: IP67</p> <p>Nominal rating: 0.1 ÷ 10 A / 250VAC</p> <p>Minimum rating: 1 mA / 4 VDC</p> <p>Operating temperature: -20 ÷ +85°C</p> 	 <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>CS23</th> <th>CSA23</th> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>DCV 20</td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td>DCV 40</td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		A		B		CS23	CSA23	mm	inch	mm	inch	DCV 20	55	2.17	—	—	50.5	1.99	DCV 40	62.5	2.46	67.5	2.66	51.5	2.03
	A		B																									
	CS23	CSA23	mm	inch	mm	inch																						
DCV 20	55	2.17	—	—	50.5	1.99																						
DCV 40	62.5	2.46	67.5	2.66	51.5	2.03																						
CS24 (1)	<p>Handle 180° with microswitch in 4th position</p> <p>Protection degree: IP67</p> <p>Nominal rating: 0.1 ÷ 10 A / 250VAC</p> <p>Minimum rating: 1 mA / 4 VDC</p> <p>Operating temperature: -20 ÷ +85°C</p> 	 <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>CS24</th> <th>CSA24</th> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td>DCV 20</td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td>DCV 40</td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> </tbody> </table>		A		B		CS24	CSA24	mm	inch	mm	inch	DCV 20	55	2.17	—	—	50.5	1.99	DCV 40	62.5	2.46	67.5	2.66	51.5	2.03
	A		B																									
	CS24	CSA24	mm	inch	mm	inch																						
DCV 20	55	2.17	—	—	50.5	1.99																						
DCV 40	62.5	2.46	67.5	2.66	51.5	2.03																						

(1) CSA. = Aluminium version (only DCV40)

# Working sections

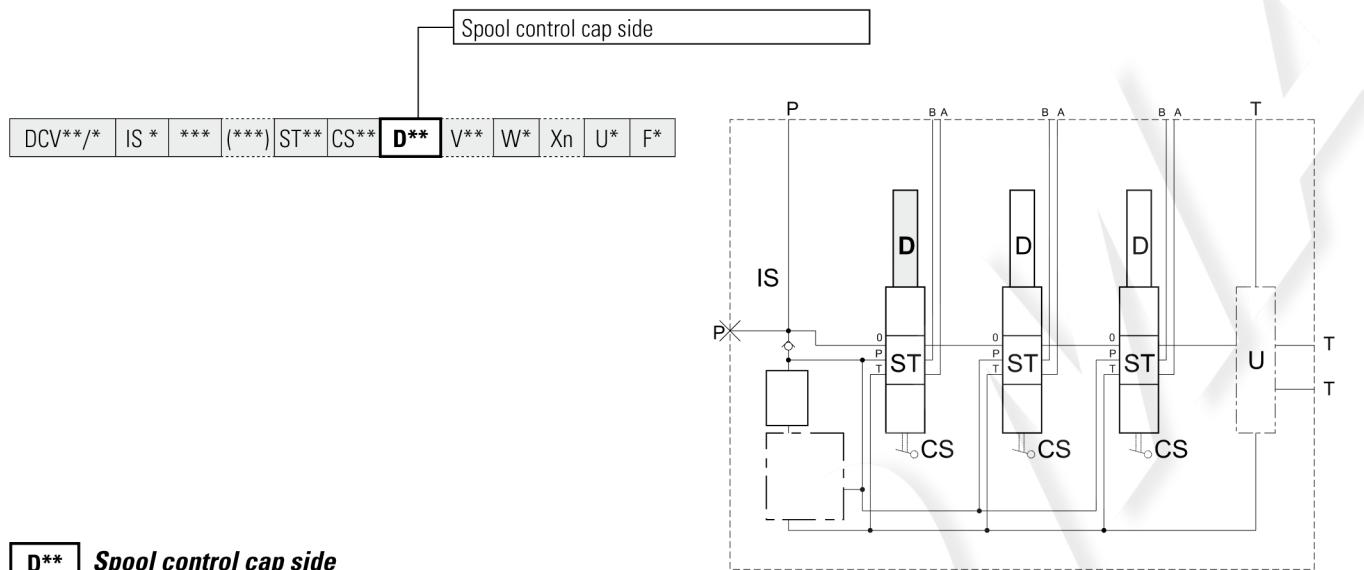







## **D\*\* Spool control cap side**

**	Description	Drawing	A												
<b>D1 DA1 (1)</b>	3 positions, spring centred spool		<table border="1"> <tr> <th></th><th colspan="2"><b>A</b></th></tr> <tr> <th></th><th><b>D1</b></th><th><b>DA1</b></th></tr> <tr> <td><b>DCV 20</b></td><td>36.5</td><td>1.03</td></tr> <tr> <td><b>DCV 40</b></td><td>41.5</td><td>1.63</td></tr> </table>		<b>A</b>			<b>D1</b>	<b>DA1</b>	<b>DCV 20</b>	36.5	1.03	<b>DCV 40</b>	41.5	1.63
	<b>A</b>														
	<b>D1</b>	<b>DA1</b>													
<b>DCV 20</b>	36.5	1.03													
<b>DCV 40</b>	41.5	1.63													
<b>D2 DA2 (1)</b>	3 positions, spring centred spool, detent in "a" and "b"		<table border="1"> <tr> <th></th><th colspan="2"><b>A</b></th></tr> <tr> <th></th><th><b>D2</b></th><th><b>DA2</b></th></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D2</b>	<b>DA2</b>	<b>DCV 20</b>	60	2.36	<b>DCV 40</b>	72.5	2.85
	<b>A</b>														
	<b>D2</b>	<b>DA2</b>													
<b>DCV 20</b>	60	2.36													
<b>DCV 40</b>	72.5	2.85													
<b>D3 DA3 (1)</b>	3 positions, spring centred spool, detent in "a"		<table border="1"> <tr> <th></th><th colspan="2"><b>A</b></th></tr> <tr> <th></th><th><b>D3</b></th><th><b>DA3</b></th></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D3</b>	<b>DA3</b>	<b>DCV 20</b>	60	2.36	<b>DCV 40</b>	72.5	2.85
	<b>A</b>														
	<b>D3</b>	<b>DA3</b>													
<b>DCV 20</b>	60	2.36													
<b>DCV 40</b>	72.5	2.85													
<b>D4 DA4 (1)</b>	3 positions, spring centred spool, detent in "b"		<table border="1"> <tr> <th></th><th colspan="2"><b>A</b></th></tr> <tr> <th></th><th><b>D4</b></th><th><b>DA4</b></th></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D4</b>	<b>DA4</b>	<b>DCV 20</b>	60	2.36	<b>DCV 40</b>	72.5	2.85
	<b>A</b>														
	<b>D4</b>	<b>DA4</b>													
<b>DCV 20</b>	60	2.36													
<b>DCV 40</b>	72.5	2.85													
<b>D5 DA5 (1)</b>	4 positions, spring centred spool, detent in 4th position		<table border="1"> <tr> <th></th><th colspan="2"><b>A</b></th></tr> <tr> <th></th><th><b>D5</b></th><th><b>DA5</b></th></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D5</b>	<b>DA5</b>	<b>DCV 20</b>	60	2.36	<b>DCV 40</b>	72.5	2.85
	<b>A</b>														
	<b>D5</b>	<b>DA5</b>													
<b>DCV 20</b>	60	2.36													
<b>DCV 40</b>	72.5	2.85													

(1) DA. = Aluminium version (only DCV40)

# Working sections






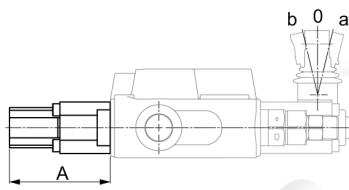
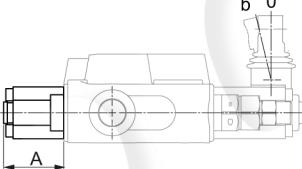
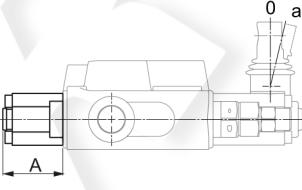
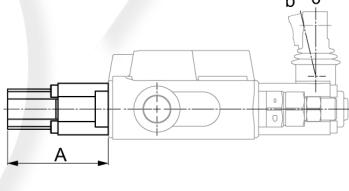
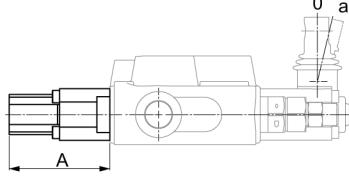
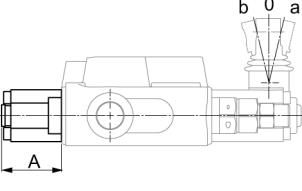
## **D\*\* Spool control cap side**

**	Description	Drawing																						
<b>D6 DA6 (1)</b>	4 positions, spring centred spool, sensitive 4th position, without detent		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D6</b></th><th><b>DA6</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D6</b>	<b>DA6</b>		mm	inch	mm	inch	<b>DCV 20</b>	60	2.36	—	—	<b>DCV 40</b>	72.5	2.85	72.5	2.85
	<b>A</b>																							
	<b>D6</b>	<b>DA6</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	60	2.36	—	—																				
<b>DCV 40</b>	72.5	2.85	72.5	2.85																				
<b>D7 DA7 (1)</b>	3 positions, spring centred spool, detent in "a" - "0" - "b"		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D7</b></th><th><b>DA7</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D7</b>	<b>DA7</b>		mm	inch	mm	inch	<b>DCV 20</b>	60	2.36	—	—	<b>DCV 40</b>	72.5	2.85	72.5	2.85
	<b>A</b>																							
	<b>D7</b>	<b>DA7</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	60	2.36	—	—																				
<b>DCV 40</b>	72.5	2.85	72.5	2.85																				
<b>D8 DA8 (1)</b>	2 positions ("0" - "b"), spring centred spool		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D8</b></th><th><b>DA8</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>36.5</td><td>1.03</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>41.5</td><td>1.63</td><td>42</td><td>1.65</td></tr> </table>		<b>A</b>			<b>D8</b>	<b>DA8</b>		mm	inch	mm	inch	<b>DCV 20</b>	36.5	1.03	—	—	<b>DCV 40</b>	41.5	1.63	42	1.65
	<b>A</b>																							
	<b>D8</b>	<b>DA8</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	36.5	1.03	—	—																				
<b>DCV 40</b>	41.5	1.63	42	1.65																				
<b>D9 DA9 (1)</b>	2 positions ("0" - "a"), spring centred spool		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D9</b></th><th><b>DA9</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>36.5</td><td>1.03</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>41.5</td><td>1.63</td><td>42</td><td>1.65</td></tr> </table>		<b>A</b>			<b>D9</b>	<b>DA9</b>		mm	inch	mm	inch	<b>DCV 20</b>	36.5	1.03	—	—	<b>DCV 40</b>	41.5	1.63	42	1.65
	<b>A</b>																							
	<b>D9</b>	<b>DA9</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	36.5	1.03	—	—																				
<b>DCV 40</b>	41.5	1.63	42	1.65																				
<b>D10 DA10 (1)</b>	2 positions ("0" - "b"), spring centred spool, detent in "b"		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D10</b></th><th><b>DA10</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D10</b>	<b>DA10</b>		mm	inch	mm	inch	<b>DCV 20</b>	60	2.36	—	—	<b>DCV 40</b>	72.5	2.85	72.5	2.85
	<b>A</b>																							
	<b>D10</b>	<b>DA10</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	60	2.36	—	—																				
<b>DCV 40</b>	72.5	2.85	72.5	2.85																				
<b>D11 DA11 (1)</b>	2 positions ("0" - "a"), spring centred spool, detent in "a"		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D11</b></th><th><b>DA11</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>60</td><td>2.36</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>72.5</td><td>2.85</td><td>72.5</td><td>2.85</td></tr> </table>		<b>A</b>			<b>D11</b>	<b>DA11</b>		mm	inch	mm	inch	<b>DCV 20</b>	60	2.36	—	—	<b>DCV 40</b>	72.5	2.85	72.5	2.85
	<b>A</b>																							
	<b>D11</b>	<b>DA11</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	60	2.36	—	—																				
<b>DCV 40</b>	72.5	2.85	72.5	2.85																				
<b>D12 DA12 (1)</b>	3 positions free (without spring)		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td></td><th colspan="2"><b>A</b></th></tr> <tr> <td></td><th><b>D12</b></th><th><b>DA12</b></th></tr> <tr> <td></td><td>mm</td><td>inch</td><td>mm</td><td>inch</td></tr> <tr> <td><b>DCV 20</b></td><td>36.5</td><td>1.03</td><td>—</td><td>—</td></tr> <tr> <td><b>DCV 40</b></td><td>41.5</td><td>1.63</td><td>42</td><td>1.65</td></tr> </table>		<b>A</b>			<b>D12</b>	<b>DA12</b>		mm	inch	mm	inch	<b>DCV 20</b>	36.5	1.03	—	—	<b>DCV 40</b>	41.5	1.63	42	1.65
	<b>A</b>																							
	<b>D12</b>	<b>DA12</b>																						
	mm	inch	mm	inch																				
<b>DCV 20</b>	36.5	1.03	—	—																				
<b>DCV 40</b>	41.5	1.63	42	1.65																				

(1) **DA.** = Aluminium version (only DCV40)

# Working sections
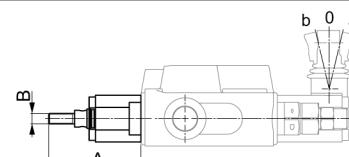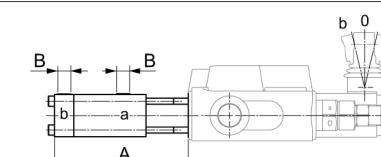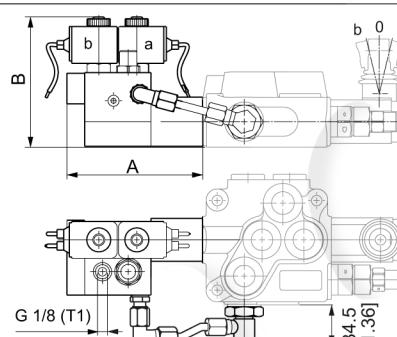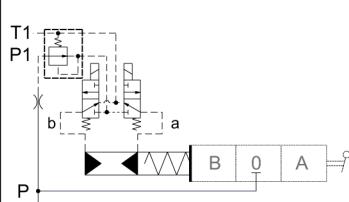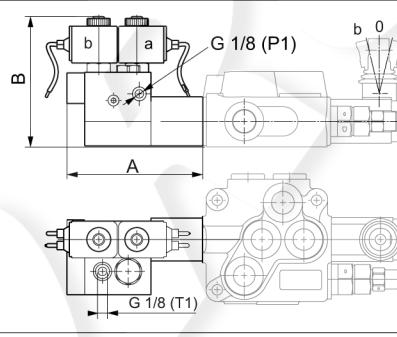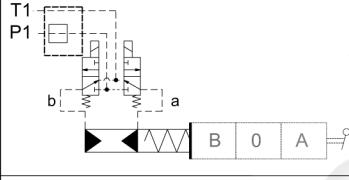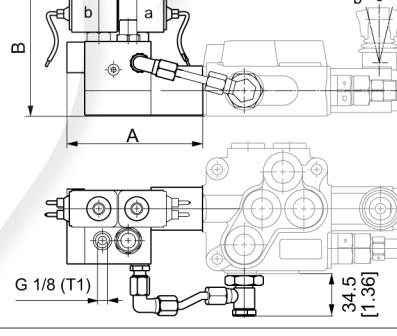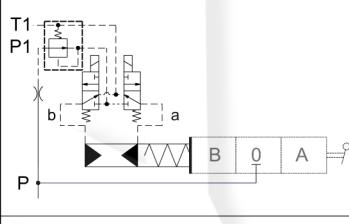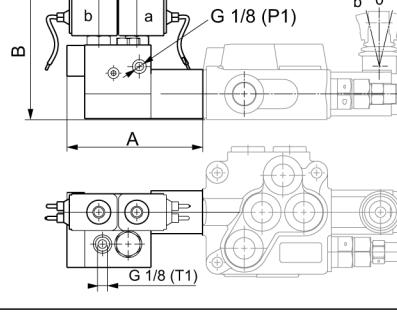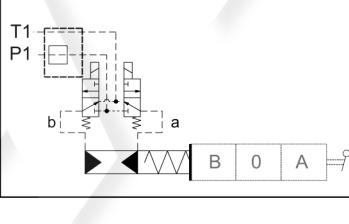
## D\*\* Spool control cap side

**	Description	Drawing		A mm inch	B mm inch
D13 DA13 (1)	Pearranged for double control		<b>DCV 20</b> 58 2.28 M6		
			<b>DCV 40</b> 71 2.80 M8		
D14	ON-OFF pneumatic control - Pilot pressure 5-10 bar 72.5-145 psi		<b>DCV 20</b> 111 4.37 1/8" BSP		
			<b>DCV 40</b> 119.5 4.70 1/8" BSP		
D15 (2)	Electrohydraulic ON-OFF control. Voltage 12Vdc with pressure reducing valve - Pilot pressure 20 bar 290 psi		<b>DCV 20</b> 91 3.58 104.5 4.11		
			<b>DCV 40</b> 96 3.78 106.5 4.19		
D16 (2)	Electrohydraulic ON-OFF control. Voltage 12Vdc without pressure reducing valve - Pilot pressure 20 bar 290 psi		<b>DCV 20</b> 91 3.58 104.5 4.11		
			<b>DCV 40</b> 96 3.78 106.5 4.19		
D17 (2)	Electrohydraulic ON-OFF control. Voltage 24Vdc with pressure reducing valve - Pilot pressure 20 bar 290 psi		<b>DCV 20</b> 91 3.58 104.5 4.11		
			<b>DCV 40</b> 96 3.78 106.5 4.19		
D18 (2)	Electrohydraulic ON-OFF control. Voltage 24Vdc without pressure reducing valve - Pilot pressure 20 bar 290 psi		<b>DCV 20</b> 91 3.58 104.5 4.11		
			<b>DCV 40</b> 96 3.78 106.5 4.19		
<b>Connector</b> wires 30 cm <b>Protection degree</b> IP65 <b>Ambient temperature</b> -30 +60 °C <b>Power</b> 7 W <b>Resistance at 20 °C</b> 14 ohm					
<b>Connector</b> wires 30 cm <b>Protection degree</b> IP65 <b>Ambient temperature</b> -30 +60 °C <b>Power</b> 7 W <b>Resistance at 20 °C</b> 14 ohm					
<b>Connector</b> wires 30 cm <b>Protection degree</b> IP65 <b>Ambient temperature</b> -30 +60 °C <b>Power</b> 7 W <b>Resistance at 20 °C</b> 30 ohm					
<b>Connector</b> wires 30 cm <b>Protection degree</b> IP65 <b>Ambient temperature</b> -30 +60 °C <b>Power</b> 7 W <b>Resistance at 20 °C</b> 30 ohm					

(1) DA. = Aluminium version (only DCV40)

(2) Valid only for the first section

# Working sections

## D\*\* Spool control cap side

**	Description	Drawing		A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>										
D19 (3)	Electrohydraulic ON-OFF control. Voltage 12Vdc - Pilot pressure 20 bar 290 psi		<table border="1"><tr><td>Connector</td><td>wires 30 cm</td></tr><tr><td>Protection degree</td><td>IP65</td></tr><tr><td>Ambient temperature</td><td>-30 +60 °C</td></tr><tr><td>Power</td><td>7 W</td></tr><tr><td>Resistance at 20 °C</td><td>14 ohm</td></tr></table>	Connector	wires 30 cm	Protection degree	IP65	Ambient temperature	-30 +60 °C	Power	7 W	Resistance at 20 °C	14 ohm	A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>
Connector	wires 30 cm														
Protection degree	IP65														
Ambient temperature	-30 +60 °C														
Power	7 W														
Resistance at 20 °C	14 ohm														
D20 (3)	Electrohydraulic ON-OFF control. Voltage 24Vdc - Pilot pressure 20 bar 290 psi		<table border="1"><tr><td>Connector</td><td>wires 30 cm</td></tr><tr><td>Protection degree</td><td>IP65</td></tr><tr><td>Ambient temperature</td><td>-30 +60 °C</td></tr><tr><td>Power</td><td>7 W</td></tr><tr><td>Resistance at 20 °C</td><td>30 ohm</td></tr></table>	Connector	wires 30 cm	Protection degree	IP65	Ambient temperature	-30 +60 °C	Power	7 W	Resistance at 20 °C	30 ohm	A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>
Connector	wires 30 cm														
Protection degree	IP65														
Ambient temperature	-30 +60 °C														
Power	7 W														
Resistance at 20 °C	30 ohm														
D21	ON-OFF electro pneumatic control. Voltage 12Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"><tr><td>Connector</td><td>DIN 43650-B ISO6952</td></tr><tr><td>Protection degree</td><td>IP65</td></tr><tr><td>Ambient temperature</td><td>-20 +40 °C</td></tr><tr><td>Power</td><td>6 W</td></tr></table>	Connector	DIN 43650-B ISO6952	Protection degree	IP65	Ambient temperature	-20 +40 °C	Power	6 W	A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>		
Connector	DIN 43650-B ISO6952														
Protection degree	IP65														
Ambient temperature	-20 +40 °C														
Power	6 W														
D22	ON-OFF electro pneumatic control. Voltage 24Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"><tr><td>Connector</td><td>DIN 43650-B ISO6952</td></tr><tr><td>Protection degree</td><td>IP65</td></tr><tr><td>Ambient temperature</td><td>-20 +40 °C</td></tr><tr><td>Power</td><td>6 W</td></tr></table>	Connector	DIN 43650-B ISO6952	Protection degree	IP65	Ambient temperature	-20 +40 °C	Power	6 W	A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>		
Connector	DIN 43650-B ISO6952														
Protection degree	IP65														
Ambient temperature	-20 +40 °C														
Power	6 W														
D23	ON-OFF electro pneumatic control. Voltage 26Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"><tr><td>Connector</td><td>DIN 43650-B ISO6952</td></tr><tr><td>Protection degree</td><td>IP65</td></tr><tr><td>Ambient temperature</td><td>-20 +40 °C</td></tr><tr><td>Power</td><td>6 W</td></tr></table>	Connector	DIN 43650-B ISO6952	Protection degree	IP65	Ambient temperature	-20 +40 °C	Power	6 W	A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>		
Connector	DIN 43650-B ISO6952														
Protection degree	IP65														
Ambient temperature	-20 +40 °C														
Power	6 W														
D24	ON-OFF electro pneumatic control. Voltage 28Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"><tr><td>Connector</td><td>DIN 43650-B ISO6952</td></tr><tr><td>Protection degree</td><td>IP65</td></tr><tr><td>Ambient temperature</td><td>-20 +40 °C</td></tr><tr><td>Power</td><td>6 W</td></tr></table>	Connector	DIN 43650-B ISO6952	Protection degree	IP65	Ambient temperature	-20 +40 °C	Power	6 W	A mm <b>DCV 20</b> <b>DCV 40</b>	B mm <b>DCV 20</b> <b>DCV 40</b>		
Connector	DIN 43650-B ISO6952														
Protection degree	IP65														
Ambient temperature	-20 +40 °C														
Power	6 W														

(3) Valid only for the section following the first one

# Working sections

## D\*\* Spool control cap side

**	Description	Drawing																
<b>D25 DA25 (1)</b>	Micro-switch in "a" and "b" Protection degree: IP67 Nominal power: 0.1 ÷ 10 A / 250VAC Minimum power: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C		<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 40</b></td> <td>72.5</td> <td>2.85</td> <td>50</td> <td>1.97</td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 40</b>	72.5	2.85	50	1.97					
	A mm	A inch	B mm	B inch														
<b>DCV 40</b>	72.5	2.85	50	1.97														
<b>D26 DA26 (1)</b>	Micro-switch in "a" Protection degree: IP67 Nominal power: 0.1 ÷ 10 A / 250VAC Minimum power: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C		<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 40</b></td> <td>72.5</td> <td>2.85</td> <td>50</td> <td>1.97</td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 40</b>	72.5	2.85	50	1.97					
	A mm	A inch	B mm	B inch														
<b>DCV 40</b>	72.5	2.85	50	1.97														
<b>D27 DA27 (1)</b>	Micro-switch in "b" Protection degree: IP67 Nominal power: 0.1 ÷ 10 A / 250VAC Minimum power: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C		<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 40</b></td> <td>72.5</td> <td>2.85</td> <td>50</td> <td>1.97</td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 40</b>	72.5	2.85	50	1.97					
	A mm	A inch	B mm	B inch														
<b>DCV 40</b>	72.5	2.85	50	1.97														
<b>D29</b>	Detent with adjustable automatic hydraulic release in "a" and "b"		<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 40</b></td> <td>70</td> <td>2.76</td> <td>50</td> <td>1.97</td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 40</b>	70	2.76	50	1.97					
	A mm	A inch	B mm	B inch														
<b>DCV 40</b>	70	2.76	50	1.97														
<b>D30 DA30 (1)</b>	Spool stroke adjustment in "a"		<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>57</td> <td>2.24</td> </tr> <tr> <td><b>DCV 40</b></td> <td>62</td> <td>2.44</td> </tr> </tbody> </table>		A mm	A inch	<b>DCV 20</b>	57	2.24	<b>DCV 40</b>	62	2.44						
	A mm	A inch																
<b>DCV 20</b>	57	2.24																
<b>DCV 40</b>	62	2.44																
<b>D40</b>	Flexible cable control		<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 20</b></td> <td>81</td> <td>3.19</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV 40</b></td> <td>93</td> <td>3.66</td> <td>(2)</td> <td>(2)</td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 20</b>	81	3.19	(2)	(2)	<b>DCV 40</b>	93	3.66	(2)	(2)
	A mm	A inch	B mm	B inch														
<b>DCV 20</b>	81	3.19	(2)	(2)														
<b>DCV 40</b>	93	3.66	(2)	(2)														

(1) DA. = Aluminium version (only DCV40)

(2) Length cable and control, contact our commercial dept

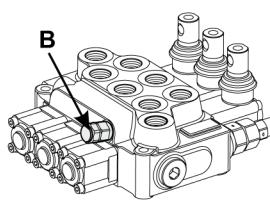
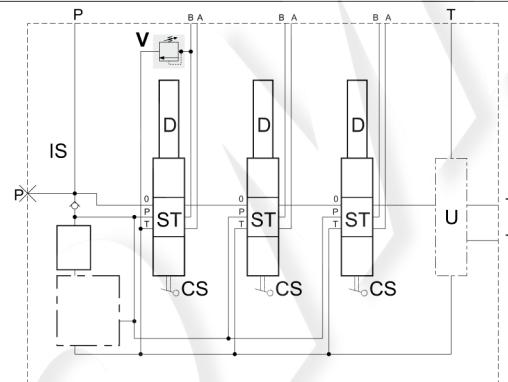
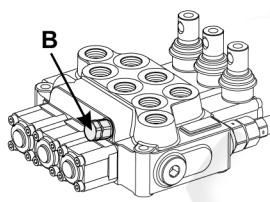
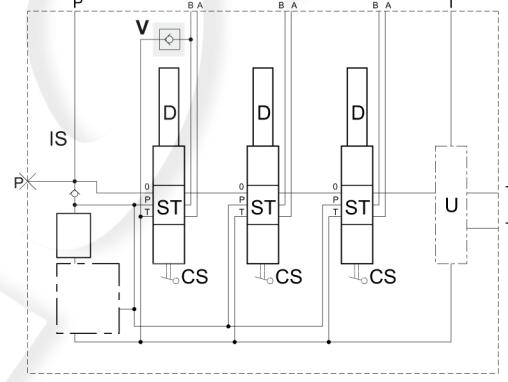
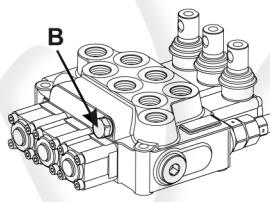
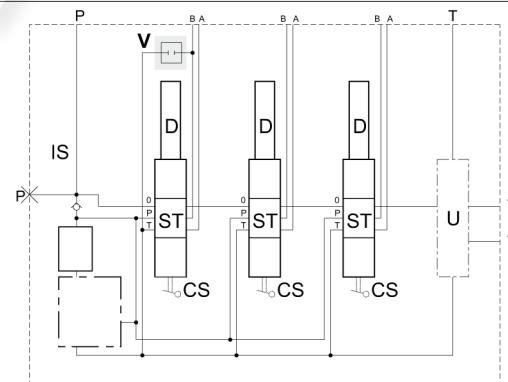
# Working sections

Service port valves (optional field)

DCV\*\*/\* | IS \* | \*\*\* | (\*\*\*) | ST\*\* | CS\*\* | D\*\* | V\*\* | W\* | Xn | U\* | F\*

Service port valves optional, is required a special monoblock body.  
Omit for standard version (without valves, without prearranged for valve)

## V\*\* Service port valves

**	Description	Drawing
VB1 (***) (1)(2)	Overload valve in position "B"	 
VB2 (2)(3)	Anti-cavitation valve in "B"	 
VB4 (2)	Preadranged for auxillary valve in "B" with plug	 

(1) Specify the relief valve setting (from 20 to 350 bar)

(2) For service port valves or prearranged for port valve with plug in "A" and/or "B" port please contact our commercial department.



(3) Only for DCV20

Handle lever

Working section repeated for n. times (optional field)

DCV\*\*/\* | IS \* | \*\*\* | (\*\*\*) | ST\*\* | CS\*\* | D\*\* | V\*\* | W\* | Xn | U\* | F\*

## W\* Handle lever






**	Description	Drawing
W1	Standard DCV 20 For cloche control use W2	
W2	Standard DCV 40	

# Working sections

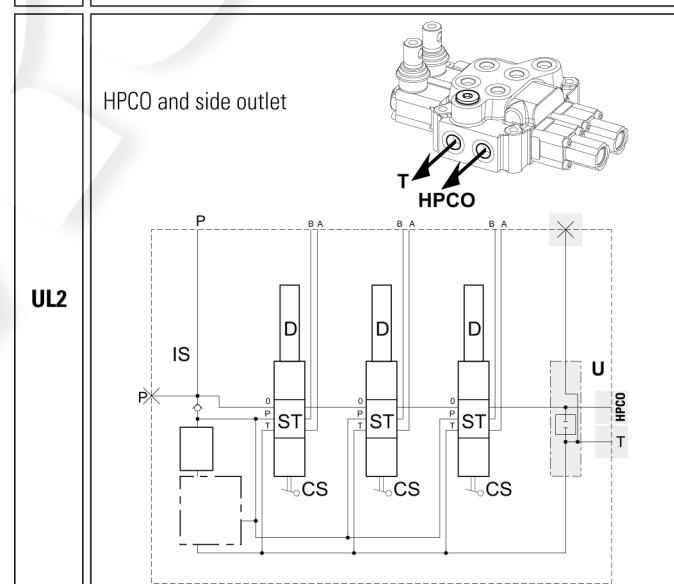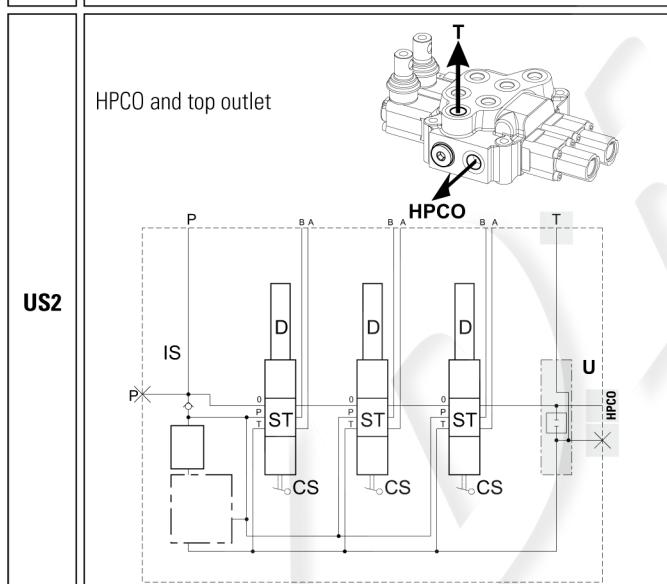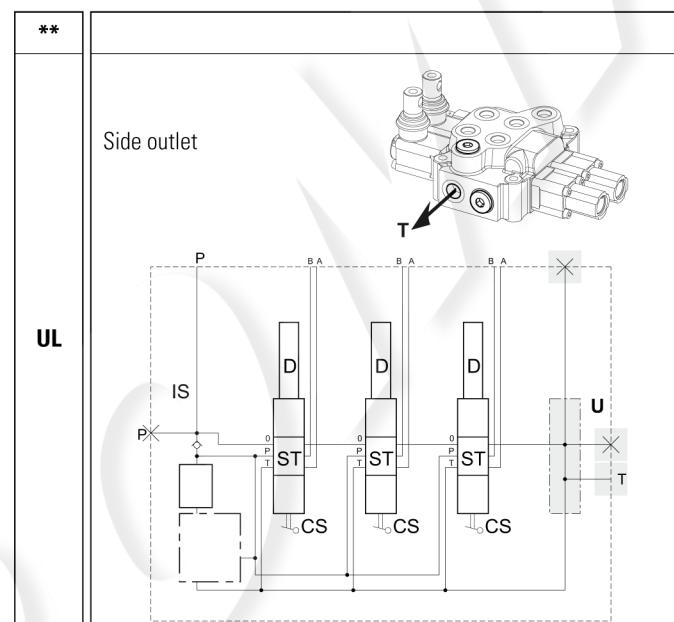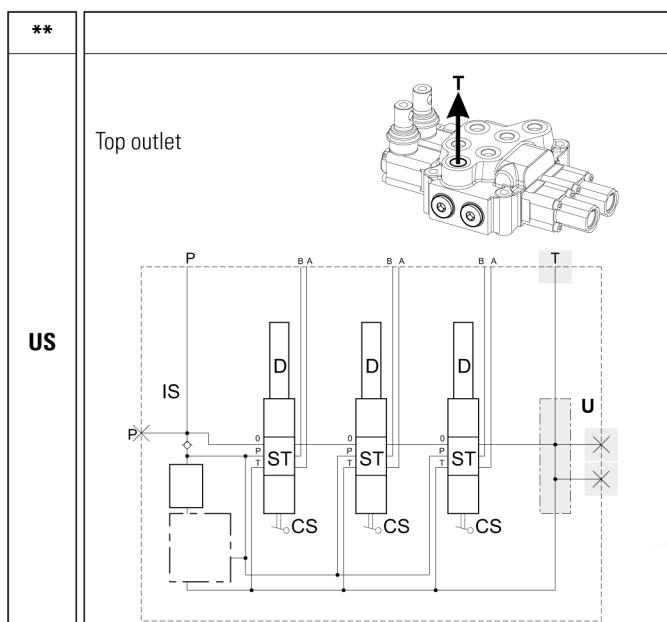**MONOBLOCK**



## U\* Outlet




## F\* Threads

**	Description	DCV20	DCV40
<b>F3</b>	3/8" BSP	•	• (1)
<b>F31</b>	9/16" - 18 (SAE6)	•	
<b>F4</b>	1/2" BSP	•	
<b>F32</b>	3/4" - 16 (SAE8)	•	
<b>F33</b>	7/8" 14 (SAE10)	• (1)	

(1) Threads available on request

# Modular valve DCV30
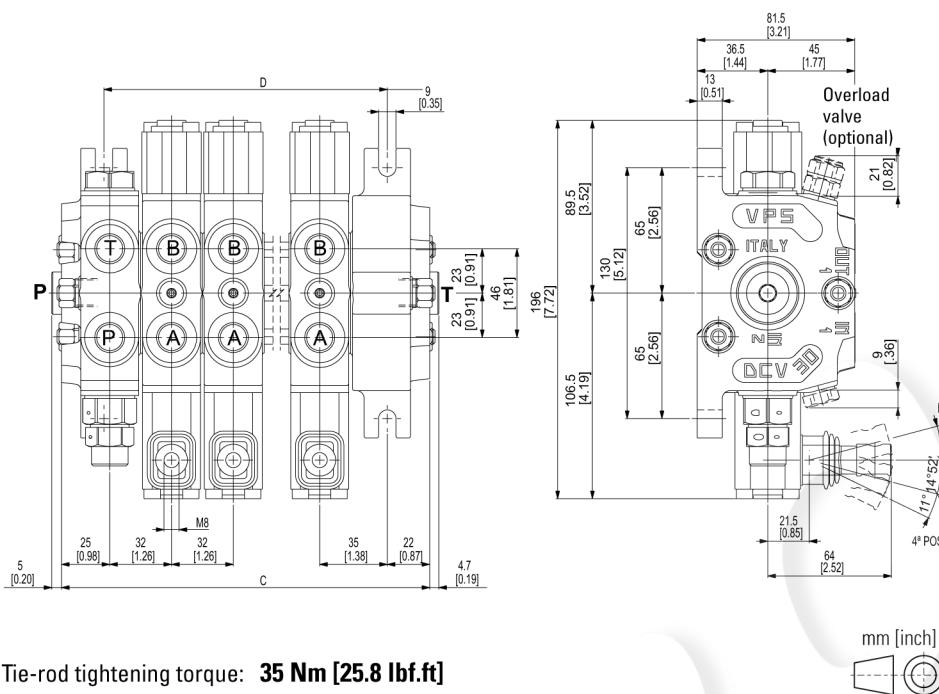
## OVERALL DIMENSIONS



Type	C mm [inch]	D mm [inch]	Weight kg [lb]
<b>DCV 30/1</b>	114 [4.49]	70 [2.76]	4.70 [10.34]
<b>DCV 30/2</b>	146 [5.75]	102 [4.02]	6.40 [14.08]
<b>DCV 30/3</b>	178 [7.01]	134 [5.28]	8.10 [17.82]
<b>DCV 30/4</b>	210 [8.27]	166 [6.54]	9.80 [21.56]
<b>DCV 30/5</b>	242 [9.53]	198 [7.80]	11.50 [25.30]
<b>DCV 30/6</b>	274 [10.79]	230 [9.06]	13.20 [29.04]
<b>DCV 30/7</b>	306 [12.05]	262 [10.31]	14.90 [32.78]
<b>DCV 30/8</b>	338 [13.31]	294 [11.57]	16.60 [36.52]
<b>DCV 30/9</b>	370 [14.57]	326 [12.83]	18.30 [40.26]
<b>DCV 30/10</b>	402 [15.83]	358 [14.09]	20.00 [44.00]
<b>DCV 30/11</b>	434 [17.09]	390 [15.35]	21.70 [47.74]
<b>DCV 30/12</b>	466 [18.35]	422 [16.61]	23.40 [51.48]


## CHARACTERISTIC PRESSURE DROP FLOW CURVES
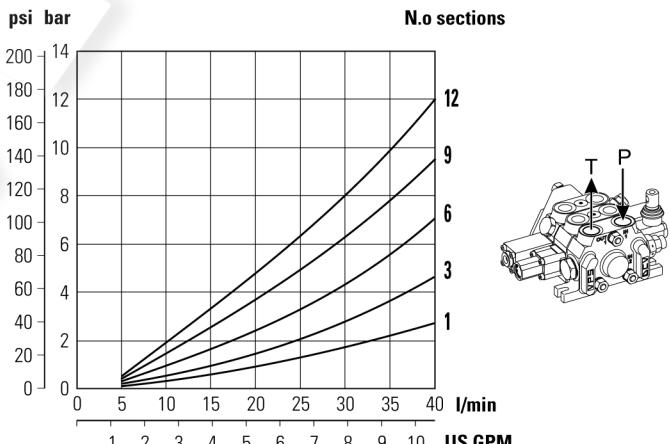
### Technical data


Flow	l/min	40
	GPM	10.6
Max pressure	BAR	350
	psi	5075
Oil viscosity	CST	30
Oil temperature	°C	50

Metering curves are different for each typee of spool.  
Therefore particular curves are supplied on request


### Inlet pressure drop between inlet port (P) and outlet port (T)



### Inlet pressure drop between inlet port (P) and work ports (A/B)


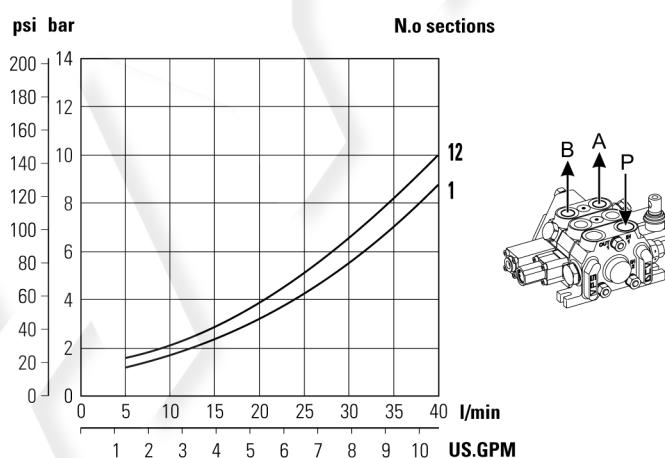


### Inlet pressure drop between work ports (A/B) and outlet port (T)

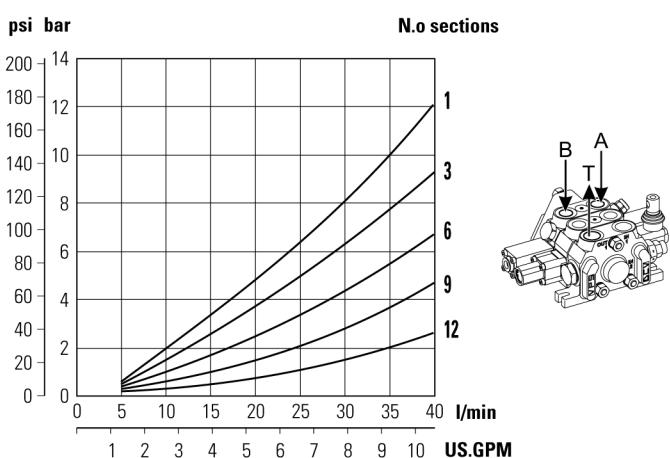

# Modular valve DCV50
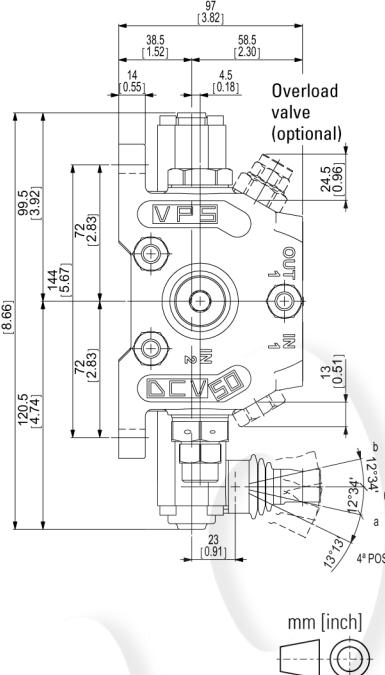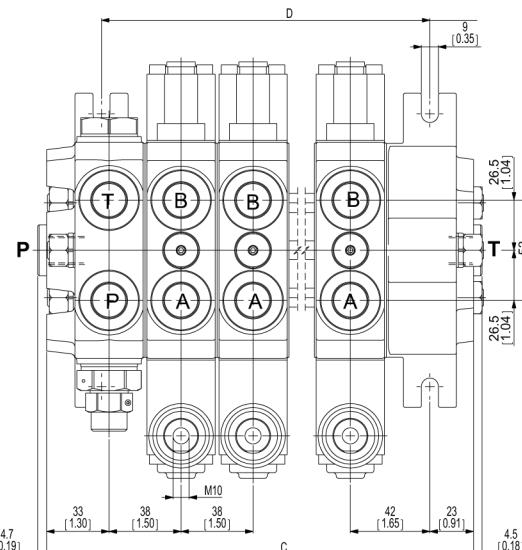
## OVERALL DIMENSIONS



Type	C mm [inch]	D mm [inch]	Weight kg [lb]
<b>DCV 50/1</b>	130 [5.12]	84 [3.31]	7.00 [15.40]
<b>DCV 50/2</b>	168 [6.61]	122 [4.80]	9.60 [21.12]
<b>DCV 50/3</b>	206 [8.11]	160 [6.30]	12.20 [26.84]
<b>DCV 50/4</b>	244 [9.61]	198 [7.80]	14.80 [32.56]
<b>DCV 50/5</b>	282 [11.10]	236 [9.29]	17.40 [38.28]
<b>DCV 50/6</b>	320 [12.60]	274 [10.79]	20.00 [44.00]
<b>DCV 50/7</b>	358 [14.09]	312 [12.28]	22.60 [49.72]
<b>DCV 50/8</b>	396 [15.59]	350 [13.78]	25.20 [55.44]
<b>DCV 50/9</b>	434 [17.09]	388 [15.28]	27.80 [61.16]
<b>DCV 50/10</b>	472 [18.58]	426 [16.77]	30.40 [67.88]
<b>DCV 50/11</b>	510 [20.08]	464 [18.27]	33.00 [72.60]
<b>DCV 50/12</b>	548 [21.57]	502 [19.76]	35.60 [78.32]

Tie-rod tightening torque: **55 Nm [40.6 lbf.ft]**



## CHARACTERISTIC PRESSURE DROP FLOW CURVES
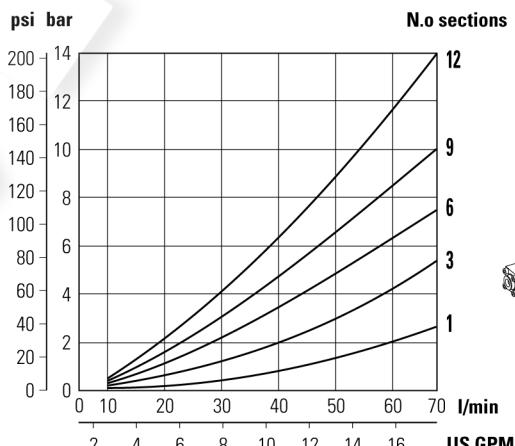
### Technical data



Flow	l/min	70
	GPM	18.5
Max pressure	BAR	350
	psi	5075
Oil viscosity	CST	30
Oil temperature	°C	50

Metering curves are different for each typee of spool.  
Therefore particular curves are supplied on request



### Inlet pressure drop between inlet port (P) and outlet port (T)



### Inlet pressure drop between inlet port (P) and work ports (A/B)

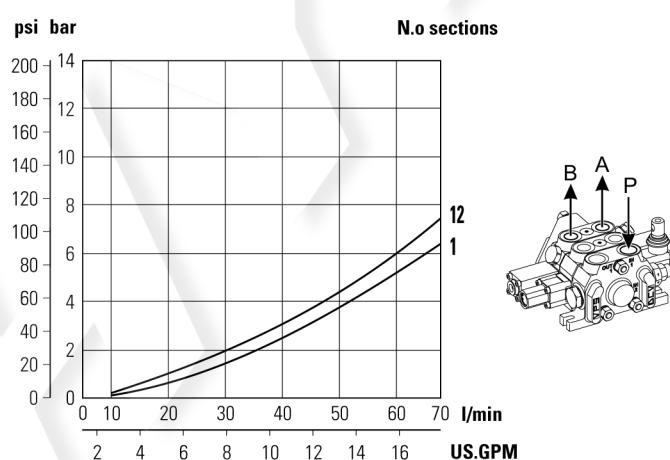


### Inlet pressure drop between work ports (A/B) and outlet port (T)

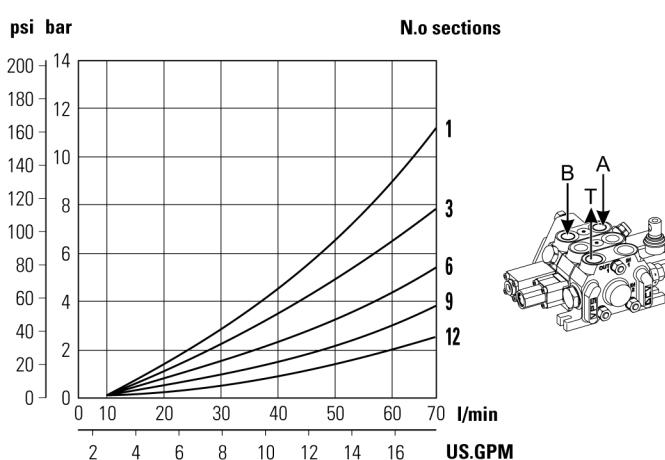


# Modular valve DCV80
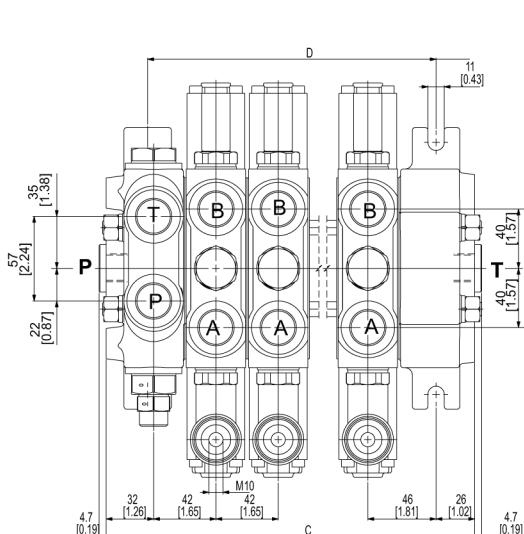
## OVERALL DIMENSIONS



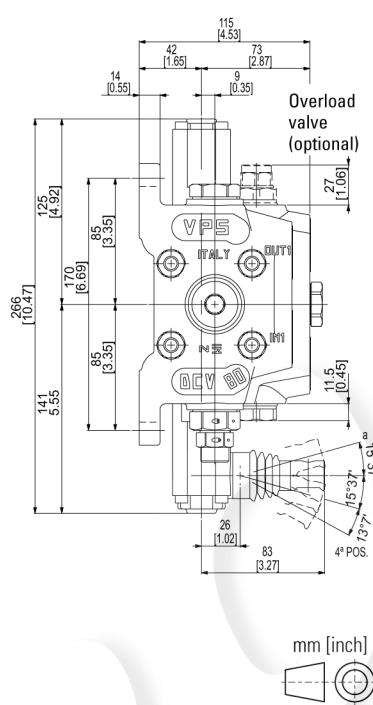Tie-rod tightening torque: **55 Nm [40.6 lbf.ft]**



Type	C mm [inch]	D mm [inch]	Weight kg [lb]
<b>DCV 80/1</b>	144 [5.67]	92 [3.62]	9.80 [21.56]
<b>DCV 80/2</b>	186 [7.32]	134 [5.28]	13.70 [30.14]
<b>DCV 80/3</b>	228 [8.98]	176 [6.93]	17.60 [38.72]
<b>DCV 80/4</b>	270 [10.63]	218 [8.58]	21.50 [47.30]
<b>DCV 80/5</b>	312 [12.28]	260 [10.24]	25.40 [55.88]
<b>DCV 80/6</b>	354 [13.94]	302 [11.89]	29.30 [64.46]
<b>DCV 80/7</b>	396 [15.59]	344 [13.54]	32.20 [70.84]
<b>DCV 80/8</b>	438 [17.24]	386 [15.20]	37.10 [81.62]
<b>DCV 80/9</b>	480 [18.90]	428 [16.85]	41.00 [90.20]
<b>DCV 80/10</b>	522 [20.55]	470 [18.50]	44.90 [98.78]
<b>DCV 80/11</b>	564 [22.20]	512 [20.16]	48.80 [107.36]
<b>DCV 80/12</b>	606 [23.86]	554 [21.81]	52.70 [115.94]


## CHARACTERISTIC PRESSURE DROP FLOW CURVES
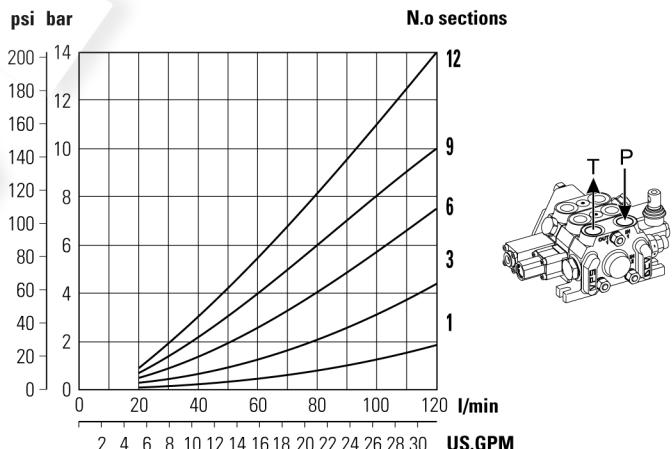
### Technical data


Flow	l/min	120
	GPM	31.7
Max pressure	BAR	350
	psi	5075
Oil viscosity	CST	30
Oil temperature	°C	50

Metering curves are different for each typee of spool.  
Therefore particular curves are supplied on request


### Inlet pressure drop between inlet port (P) and outlet port (T)



### Inlet pressure drop between inlet port (P) and work ports (A/B)

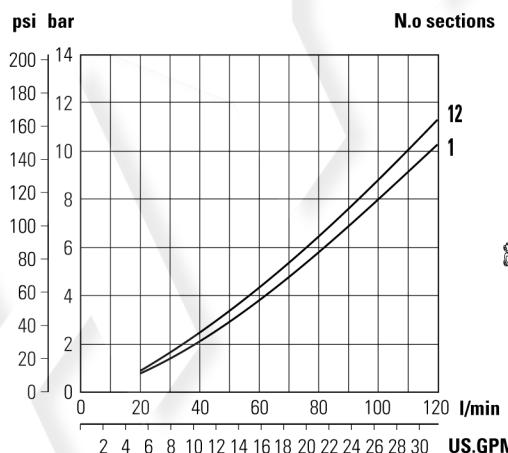


### Inlet pressure drop between work ports (A/B) and outlet port (T)

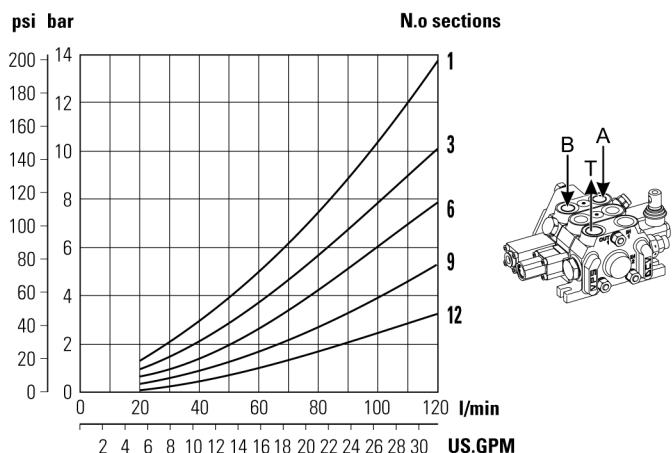

# Modular valve DCV MG
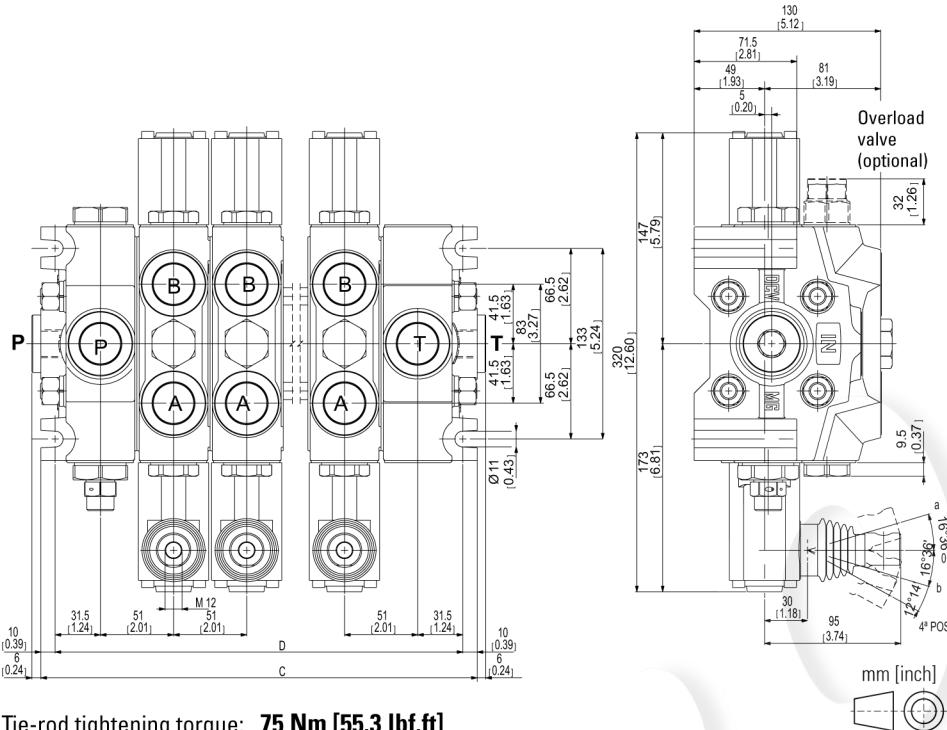
## OVERALL DIMENSIONS



Type	C mm [inch]	D mm [inch]	Weight kg [lb]
<b>DCV MG/1</b>	185 [7.28]	165 [6.50]	16.00 [35.20]
<b>DCV MG/2</b>	236 [9.29]	216 [8.50]	22.60 [49.72]
<b>DCV MG/3</b>	287 [11.30]	267 [10.51]	29.20 [64.24]
<b>DCV MG/4</b>	338 [13.31]	318 [12.52]	35.80 [78.76]
<b>DCV MG/5</b>	389 [15.31]	368 [14.49]	42.40 [93.28]
<b>DCV MG/6</b>	440 [17.32]	420 [16.54]	49.00 [107.80]
<b>DCV MG/7</b>	491 [19.33]	461 [18.15]	55.60 [122.32]
<b>DCV MG/8</b>	542 [21.34]	522 [20.55]	62.20 [136.84]
<b>DCV MG/9</b>	593 [23.35]	573 [22.56]	68.80 [151.36]
<b>DCV MG/10</b>	644 [25.35]	624 [24.57]	75.40 [165.88]
<b>DCV MG/11</b>	695 [27.36]	675 [26.57]	82.00 [180.40]
<b>DCV MG/12</b>	746 [29.37]	726 [28.58]	88.60 [194.92]


## CHARACTERISTIC PRESSURE DROP FLOW CURVES
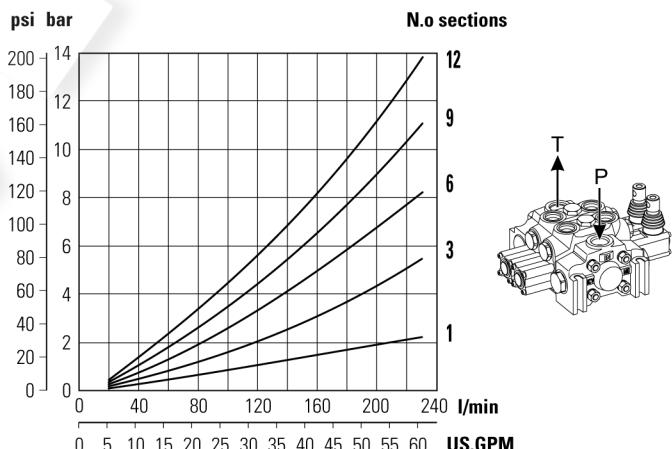
### Technical data


Flow	l/min	230
	GPM	60.7
Max pressure	BAR	350
	psi	5075
Oil viscosity	CST	30
Oil temperature	°C	50

Metering curves are different for each typee of spool.  
Therefore particular curves are supplied on request


### Inlet pressure drop between inlet port (P) and outlet port (T)



### Inlet pressure drop between inlet port (P) and work ports (A/B)

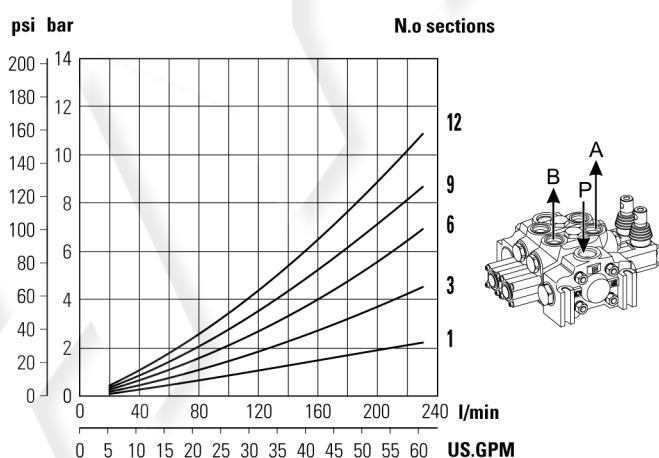

### Inlet pressure drop between work ports (A/B) and outlet port (T)

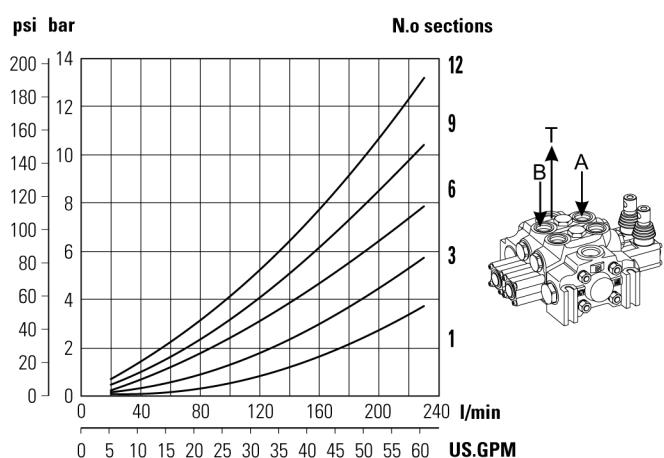


# Ordering code

Model	Inlet section	Working sections (repeat for any section)										Interm. section	(1)	Outlet section	
		DCV ** / *	I* *** (***) *	F*	ST**	CS**	D**	VA*(**)	VB*(**)	AP*	F*	W*	Xn:IM*	F*	
<b>DCV ** / *</b>	<b>I* *** (***) *</b>	<b>F*</b>	<b>ST**</b>	<b>CS**</b>	<b>D**</b>	<b>VA*(**)</b>	<b>VB*(**)</b>	<b>AP*</b>	<b>F*</b>	<b>W*</b>	<b>Xn:IM*</b>	<b>F*</b>	<b>(1)</b>	<b>U*</b>	<b>F*</b>
<b>Description</b>	<b>Page</b>														
Size (30 50 80 MG)	23-24														
N.o working sections	25-26														
Inlet type	29														
Valves arrangement	30														
Main relief valve setting	30														
Port location	31														
Threads	31														
Spool	32														
Spool control handle side	33														
Spool control cap side	33														
Auxiliary valve on port A	43														
Auxiliary valve on port B	43														
Circuit	44														
Threads	46														
Hand lever	46														
Working section repeated for n. times	46														
Intermediate (optional)	47														
Threads	50														
(1) Others working section (optional)	—														
Outlet	51														
Threads	52														

----- Optional fields

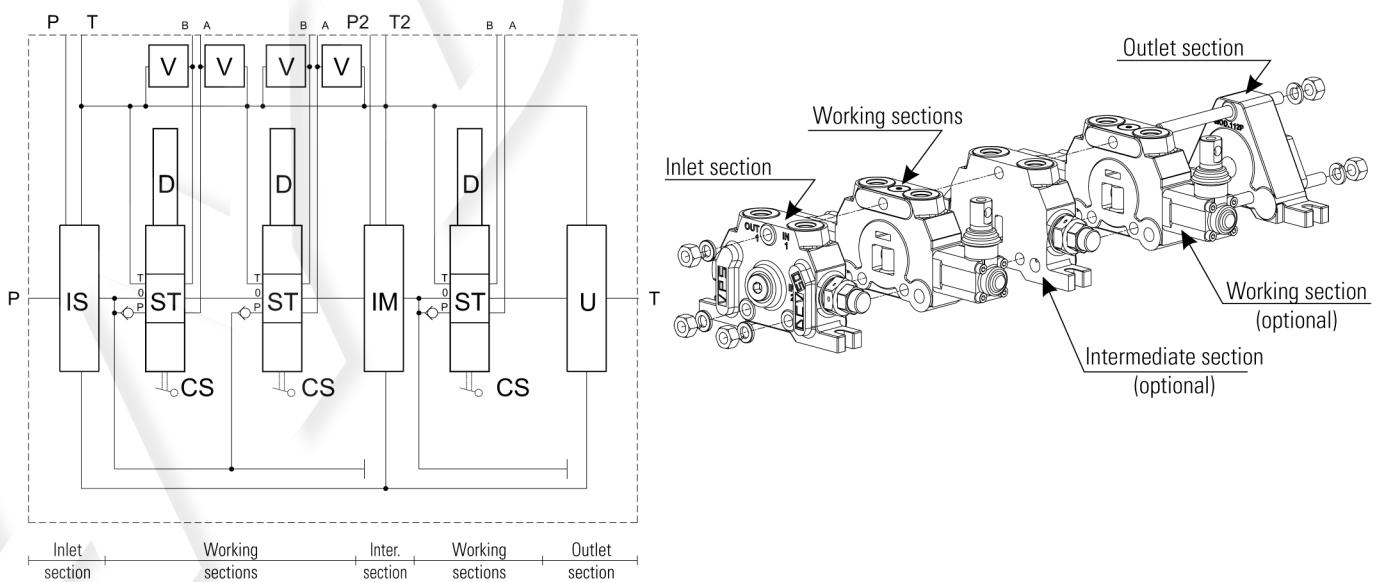
## HYDRAULIC SCHEME



# Ordering code


## ORDERING CODE EXAMPLE

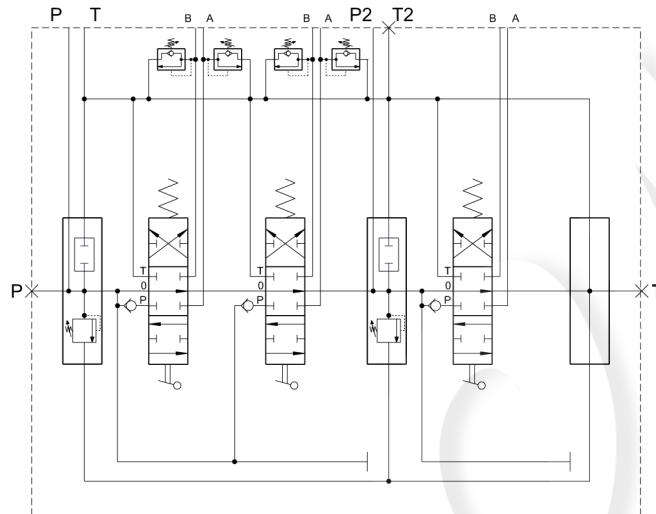MODULAR







- DCV 30/3** - Distributore componibile DCV30 3 sezioni  
**IS** - Left hand inlet  
**001** - Valves arrangement : Pilot-operated main relief valve (handle side) + Valve seat with plug (cap side)  
**(200)** - Valve setting 200 BAR  
**S** - Top inlet  
**F3** - Threads 3/8" BSP  
**ST1** - Spool 3 positions, double acting  
**CS1** - Spool control handle side standard  
**D4** - Spool control cap side. 3 positions, spring centred spool, detent in "b"  
**VA3** - Service port valves - Combined valve in "A" port  
**(150)** - Valve setting 150 BAR  
**VB3** - Service port valves - Combined valve in "B" port  
**(150)** - Valve setting 150 bar  
**AP1** - Parallel circuit  
**F3** - Threads 3/8" BSP  
**X2** - Working section repeated for n. 2 times  
**IME** - Intermediate section - parallel circuit  
**001** - Valves arrangement : Pilot-operated main relief valve (handle side) + Valve seat with plug (cap side)  
**(200)** - Valve setting 200 BAR  
**F3** - Threads 3/8" BSP  
**ST1** - Spool 3 positions, double acting  
**CS1** - Spool control handle side standard  
**D1** - Spool control cap side. 3 positions, spring centred spool  
**AP1** - Parallel circuit  
**F3** - Threads 3/8" BSP  
**US** - Top outlet  
**F3** - Threads 3/8" BSP


# Inlet section

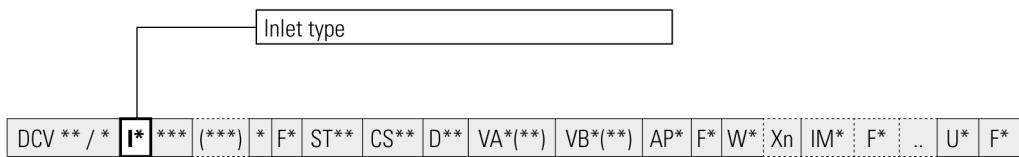

**I\*** *Inlet type*

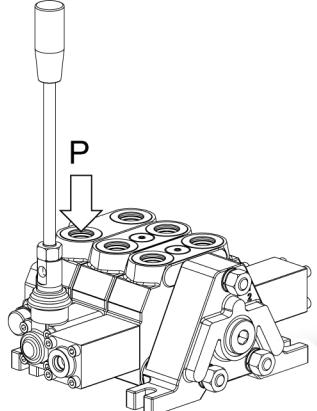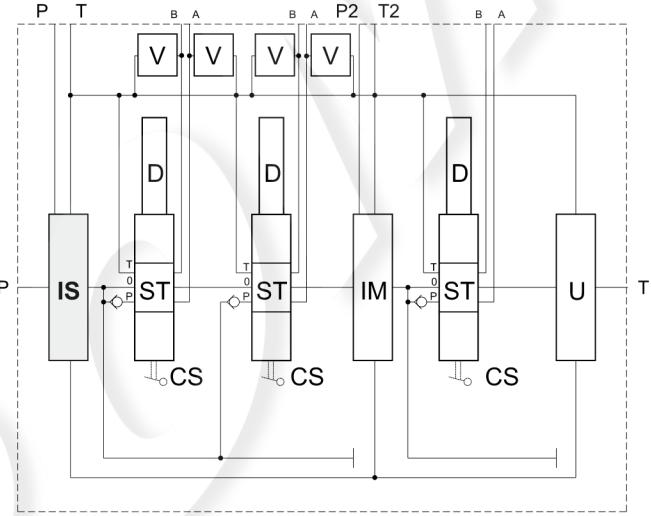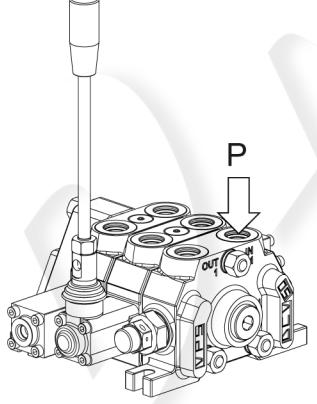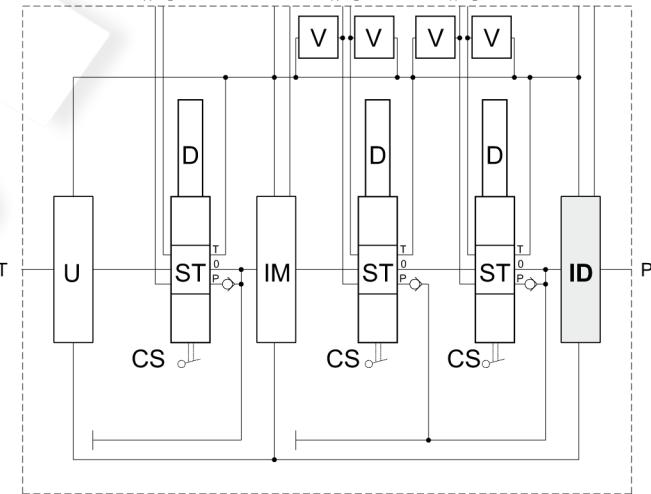*	Description	Drawing
IS	Left hand inlet	 
ID	Right hand inlet	 

# Inlet section


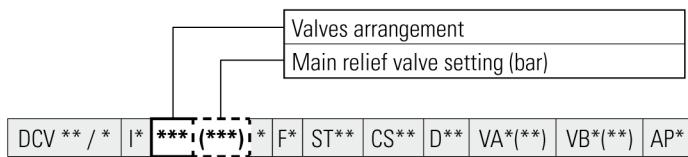


**Valves arrangements and main relief valve setting**

***	(***)	Arrangements A*	B*
<b>060</b>	(1)	A1	B3
<b>057</b>	(1)	A1	B4
<b>002</b>	(1)	A1	B6 (2)
<b>003</b>	(1)	A1	B7 (2)
<b>004</b>	(1)	A1	B8 (2)
<b>005</b>	(1)	A1	B9 (2)
<b>006</b>	(1)	A1	B10 (2)
<b>007</b>	(1)	A1	B11 (2)
<b>008</b>	(1)	A1	B12 (2)
<b>009</b>	(1)	A1	B13 (2)
<b>001</b>	(1)	A1	B14
<b>010</b>	(1)	A1	B15
<b>021</b>	—	A4	B3
<b>022</b>	—	A4	B6 (2)
<b>023</b>	—	A4	B7 (2)
<b>024</b>	—	A4	B8 (2)
<b>025</b>	—	A4	B9 (2)
<b>026</b>	—	A4	B10 (2)
<b>027</b>	—	A4	B11 (2)
<b>028</b>	—	A4	B12 (2)
<b>029</b>	—	A4	B13 (2)
<b>030</b>	—	A4	B14
<b>031</b>	—	A4	B15
<b>051</b>	—	A5	B1
<b>052</b>	—	A5	B14
<b>053</b>	—	A5	B15
<b>032</b>	(1)	A6	B1
<b>033</b>	(1)	A7	B1
<b>034</b>	(1)	A8	B1
<b>035</b>	(1)	A9	B1

(1) Specify pressure relief valve setting (from 20 to 350 bar)

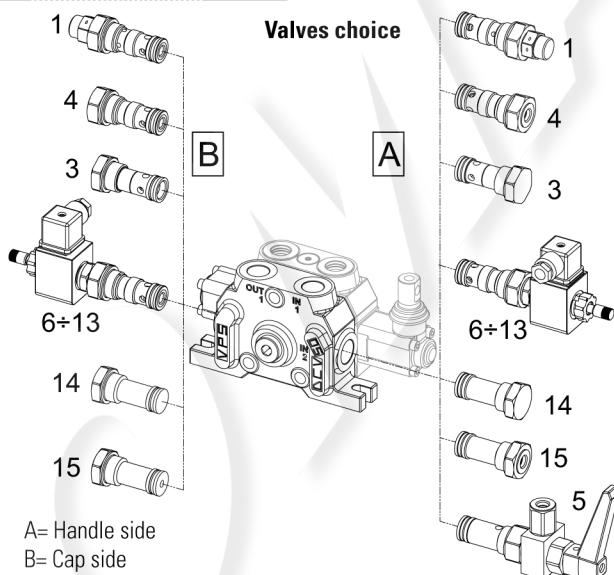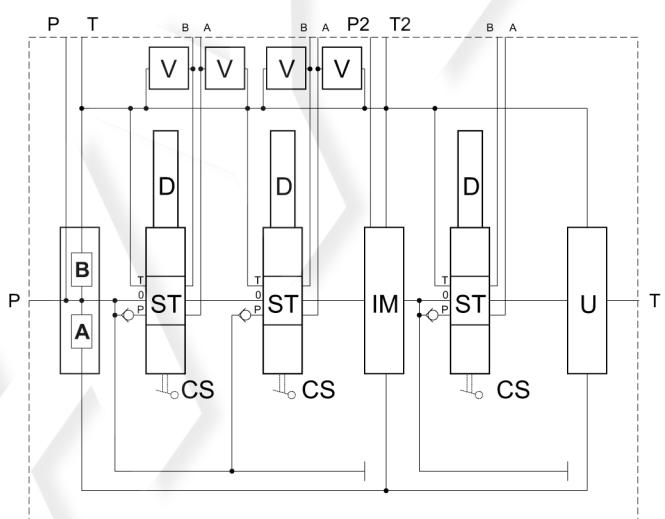(2) Can not be used with electro-hydraulic control D15 ÷ D18. Mount the electric valve on side A.



<b>1</b> (3)	Pilot-operated main relief valve	
<b>3</b>	Anticavitation valve	
<b>4</b>	External pilot-operated valve	
<b>5</b>	Cross or hydraulic brakes lock valve	
<b>6</b> (4)	Solenoid dump valve 12V work NORMALLY OPEN	
<b>8</b> (4)	Solenoid dump valve 24V work NORMALLY OPEN	
<b>10</b> (4)	Solenoid dump valve 26V work NORMALLY OPEN	
<b>12</b> (4)	Solenoid dump valve 30V work NORMALLY OPEN	
<b>7</b> (4)	Solenoid dump valve 12V work NORMALLY CLOSED	
<b>9</b> (4)	Solenoid dump valve 24V work NORMALLY CLOSED	
<b>11</b> (4)	Solenoid dump valve 26V work NORMALLY CLOSED	
<b>13</b> (4)	Solenoid dump valve 30V work NORMALLY CLOSED	
<b>14</b>	Valve seat with plug	
<b>15</b>	Pressure gauge connection	

(3) Direct operated main valve only for DCV30

(4) Solenoid features





	12V	24V	26V
Resistance ohm ( $\pm 7\%$ )	8.7	32	37.5
Connector	DIN 43650 ISO 4400		
Protection degree	IP65		
Ambient temperature	-30 +60 °C		
Power	20 W		

# Inlet section

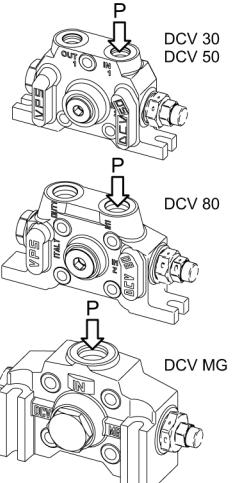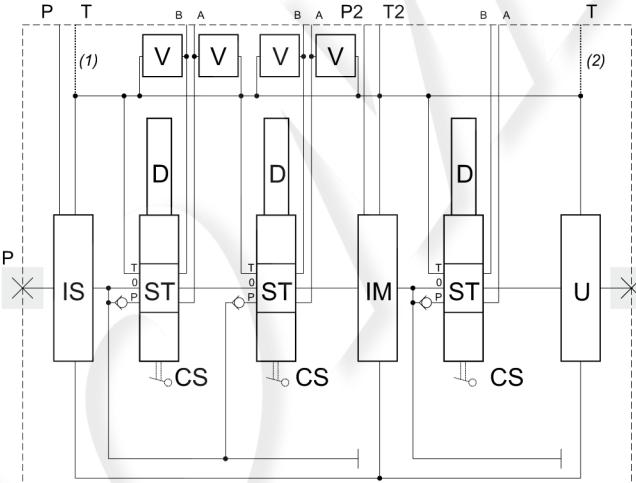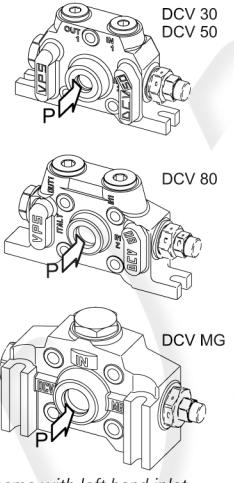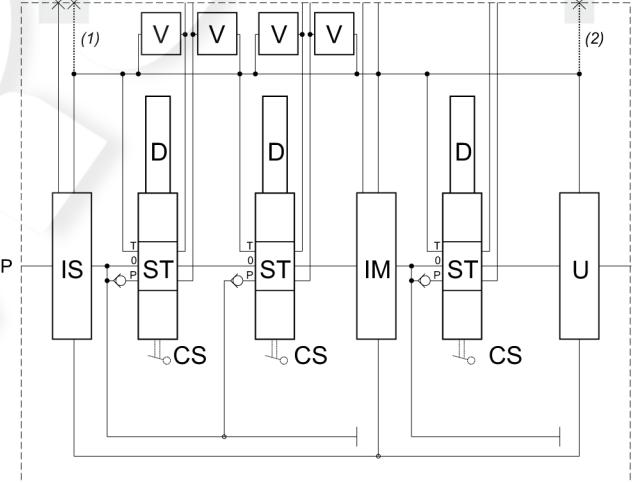Port location

DCV \*\* / \* | \* \*\*\* | (\*\*\*) \* F\* ST\*\* CS\*\* D\*\* VA\*(\*\*) VB\*(\*\*) AP\* F\* W\* Xn IM\* F\* .. U\* F\*

\* Port type

*	Description	Drawing
S	Top inlet	 <p>DCV 30 DCV 50 DCV 80 DCV MG</p> <p>Scheme with left hand inlet</p>  <p>(1) Only DCV30 - DCV50 - DCV80 (2) Only DCVMG</p>
L	Side inlet	 <p>DCV 30 DCV 50 DCV 80 DCV MG</p> <p>Scheme with left hand inlet</p>  <p>(1) Only DCV30 - DCV50 - DCV80 (2) Only DCVMG</p>


Threads

DCV \*\* / \* | \* \*\*\* | (\*\*\*) \* F\* ST\*\* CS\*\* D\*\* VA\*(\*\*) VB\*(\*\*) AP\* F\* W\* Xn IM\* F\* .. U\* F\*

F\* Threads


**	Description	DCV 30	DCV 50	DCV 80	DCV MG
F3	3/8" BSP	•			
F4	1/2" BSP		•	•	
F5	3/4" BSP			•	
F6	1" BSP				•
F31	9/16" - 18 (SAE6)	•			
F33	7/8" - 14 (SAE10)		•	•	
F34	1" 1/16 - 16 (SAE12)			•	
F36	1" 5/16 - 12 (SAE16)				•

# Working sections

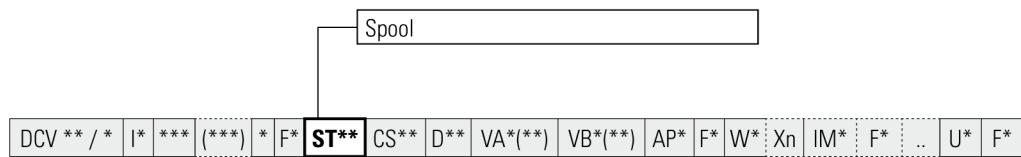

## ST\*\* Spool

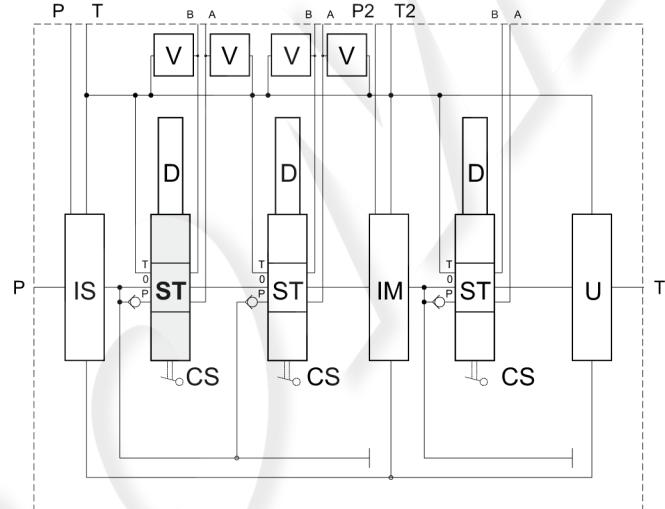
**	Description	Symbol
<b>ST1 ST1G (1)(2)</b>	3 positions, double acting	
<b>ST2</b>	3 positions, double acting, - no passage in 0 - A and B open	
<b>ST3</b>	3 positions, double acting, - no passage in 0 - A and B blocked	
<b>ST4 ST4G (1)</b>	3 positions, double acting, - A and B open	
<b>ST5 ST5G (1)</b>	3 positions, double acting, - A open - B blocked	
<b>ST6 ST6G (1)</b>	3 positions, double acting, - A blocked - B open	
<b>ST7</b>	3 positions, single acting in A	
<b>ST8</b>	3 positions, single acting in B	
<b>ST9</b>	3 positions, single acting in A - A open	
<b>ST10</b>	3 positions, single acting in B - B open	
<b>ST11</b>	3 positions, double acting regenerative in A (not standard)	
<b>ST12</b>	4 positions, double acting with 4th float position	



**	Description	Symbol
<b>ST23</b>	2 positions with function dead man (unactivated) in "a" position ; working position in "0"	
<b>ST24</b>	2 positions with function dead man (unactivated) in "b" position ; working position in "0"	
<b>ST27</b>	2 positions with function dead man (unactivated) in "0" position ; working position in "b"	
<b>ST28</b>	2 positions with function dead man (unactivated) in "0" position ; working position in "a"	
<b>ST13</b>	3 positions, series circuit double-acting	
<b>ST14</b>	3 positions, series circuit double-acting - A open - B blocked	
<b>ST15</b>	3 positions, series circuit double-acting - A and B open	
<b>ST16</b>	3 positions, series circuit double-acting - A blocked - B open	

(1) STG = Extra metering

# Working sections

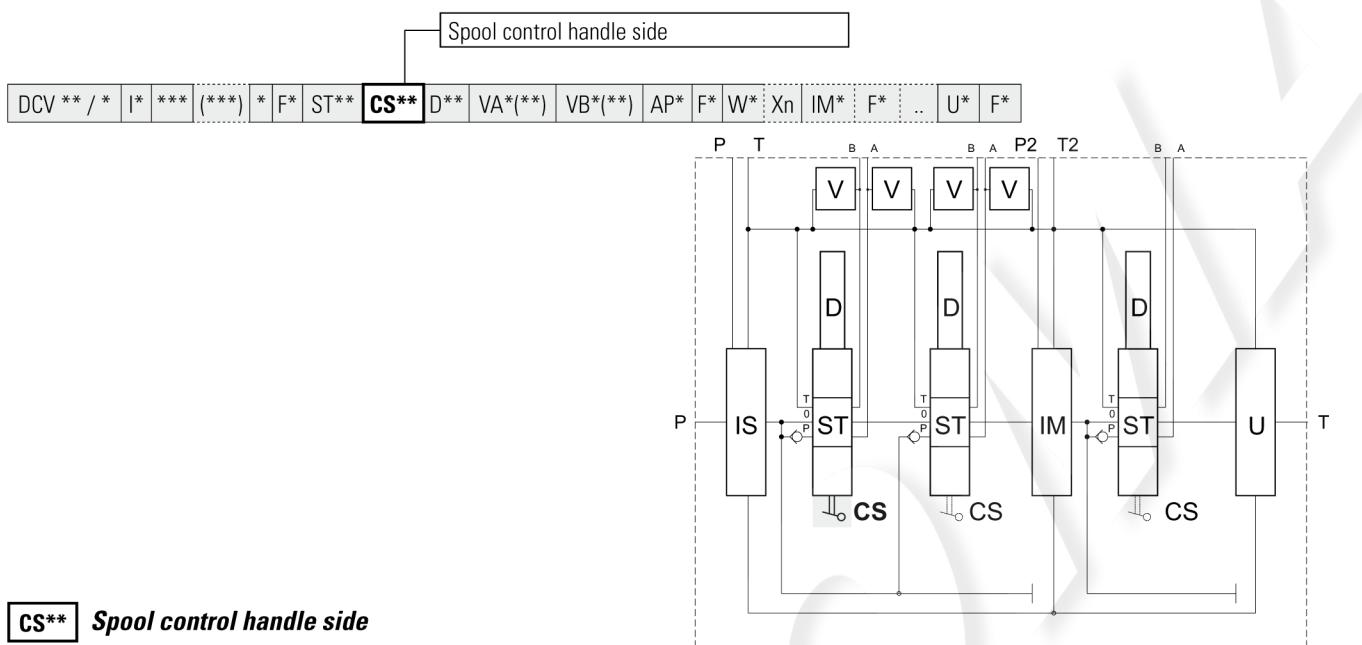







## CS\*\* Spool control handle side

**	Description	Drawing																												
CS1 CSA1 (1)	Standard handle		<table border="1"> <thead> <tr> <th rowspan="2"></th> <th rowspan="2">A mm   inch</th> <th rowspan="2">B</th> <th colspan="2">C</th> </tr> <tr> <th>CS1 mm   inch</th> <th>CSA1 mm   inch</th> </tr> </thead> <tbody> <tr> <td>DCV 30</td> <td>64   2.52</td> <td>M8</td> <td>55   2.17</td> <td>—   —</td> </tr> <tr> <td>DCV 50</td> <td>68   2.68</td> <td>M10</td> <td>62.5   2.46</td> <td>67.5   2.66</td> </tr> <tr> <td>DCV 80</td> <td>83   3.27</td> <td>M10</td> <td>74   2.91</td> <td>79.5   3.13</td> </tr> <tr> <td>DCV MG</td> <td>95   3.74</td> <td>M12</td> <td>90   3.54</td> <td>—   —</td> </tr> </tbody> </table>		A mm   inch	B	C		CS1 mm   inch	CSA1 mm   inch	DCV 30	64   2.52	M8	55   2.17	—   —	DCV 50	68   2.68	M10	62.5   2.46	67.5   2.66	DCV 80	83   3.27	M10	74   2.91	79.5   3.13	DCV MG	95   3.74	M12	90   3.54	—   —
	A mm   inch	B	C																											
			CS1 mm   inch	CSA1 mm   inch																										
DCV 30	64   2.52	M8	55   2.17	—   —																										
DCV 50	68   2.68	M10	62.5   2.46	67.5   2.66																										
DCV 80	83   3.27	M10	74   2.91	79.5   3.13																										
DCV MG	95   3.74	M12	90   3.54	—   —																										
CS2 CSA2 (1)	Handle at 180°		<table border="1"> <thead> <tr> <th rowspan="2"></th> <th rowspan="2">A mm   inch</th> <th rowspan="2">B</th> <th colspan="2">C</th> </tr> <tr> <th>CS2 mm   inch</th> <th>CSA2 mm   inch</th> </tr> </thead> <tbody> <tr> <td>DCV 30</td> <td>64   2.52</td> <td>M8</td> <td>55   2.17</td> <td>—   —</td> </tr> <tr> <td>DCV 50</td> <td>68   2.68</td> <td>M10</td> <td>62.5   2.46</td> <td>67.5   2.66</td> </tr> <tr> <td>DCV 80</td> <td>83   3.27</td> <td>M10</td> <td>74   2.91</td> <td>79.5   3.13</td> </tr> <tr> <td>DCV MG</td> <td>95   3.74</td> <td>M12</td> <td>90   3.54</td> <td>—   —</td> </tr> </tbody> </table>		A mm   inch	B	C		CS2 mm   inch	CSA2 mm   inch	DCV 30	64   2.52	M8	55   2.17	—   —	DCV 50	68   2.68	M10	62.5   2.46	67.5   2.66	DCV 80	83   3.27	M10	74   2.91	79.5   3.13	DCV MG	95   3.74	M12	90   3.54	—   —
	A mm   inch	B	C																											
			CS2 mm   inch	CSA2 mm   inch																										
DCV 30	64   2.52	M8	55   2.17	—   —																										
DCV 50	68   2.68	M10	62.5   2.46	67.5   2.66																										
DCV 80	83   3.27	M10	74   2.91	79.5   3.13																										
DCV MG	95   3.74	M12	90   3.54	—   —																										
CS3	Without handle		<table border="1"> <thead> <tr> <th></th> <th>A mm   inch</th> <th>B mm   inch</th> <th>C mm   inch</th> </tr> </thead> <tbody> <tr> <td>DCV 30</td> <td>41   1.61</td> <td>11   0.43</td> <td>6   0.24</td> </tr> <tr> <td>DCV 50</td> <td>50   1.97</td> <td>16   0.63</td> <td>9   0.35</td> </tr> <tr> <td>DCV 80</td> <td>59.5   2.34</td> <td>17.5   0.69</td> <td>9   0.35</td> </tr> <tr> <td>DCV MG</td> <td>72   2.83</td> <td>0.69   0.75</td> <td>9   0.35</td> </tr> </tbody> </table>		A mm   inch	B mm   inch	C mm   inch	DCV 30	41   1.61	11   0.43	6   0.24	DCV 50	50   1.97	16   0.63	9   0.35	DCV 80	59.5   2.34	17.5   0.69	9   0.35	DCV MG	72   2.83	0.69   0.75	9   0.35							
	A mm   inch	B mm   inch	C mm   inch																											
DCV 30	41   1.61	11   0.43	6   0.24																											
DCV 50	50   1.97	16   0.63	9   0.35																											
DCV 80	59.5   2.34	17.5   0.69	9   0.35																											
DCV MG	72   2.83	0.69   0.75	9   0.35																											
CS4	Hydraulic control - Max pilot pressure 35 bar 508 psi		<table border="1"> <thead> <tr> <th></th> <th>A mm   inch</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>DCV 30</td> <td>59   2.32</td> <td>1/4" BSP</td> </tr> <tr> <td>DCV 50</td> <td>68   2.32</td> <td>1/4" BSP</td> </tr> <tr> <td>DCV 80</td> <td>87   3.43</td> <td>1/4" BSP</td> </tr> <tr> <td>DCV MG</td> <td>80   3.15</td> <td>1/4" BSP</td> </tr> </tbody> </table>		A mm   inch	B	DCV 30	59   2.32	1/4" BSP	DCV 50	68   2.32	1/4" BSP	DCV 80	87   3.43	1/4" BSP	DCV MG	80   3.15	1/4" BSP												
	A mm   inch	B																												
DCV 30	59   2.32	1/4" BSP																												
DCV 50	68   2.32	1/4" BSP																												
DCV 80	87   3.43	1/4" BSP																												
DCV MG	80   3.15	1/4" BSP																												
CS53	Hydraulic lever control		<table border="1"> <thead> <tr> <th></th> <th>A mm   inch</th> <th>B mm   inch</th> <th>C mm   inch</th> <th>D mm   inch</th> </tr> </thead> <tbody> <tr> <td>DCV 30</td> <td>59   2.32</td> <td>109   4.29</td> <td>1/4" BSP</td> <td>64   2.52</td> </tr> <tr> <td>DCV 80</td> <td>101   3.98</td> <td>119   4.69</td> <td>1/4" BSP</td> <td>83   3.27</td> </tr> </tbody> </table>		A mm   inch	B mm   inch	C mm   inch	D mm   inch	DCV 30	59   2.32	109   4.29	1/4" BSP	64   2.52	DCV 80	101   3.98	119   4.69	1/4" BSP	83   3.27												
	A mm   inch	B mm   inch	C mm   inch	D mm   inch																										
DCV 30	59   2.32	109   4.29	1/4" BSP	64   2.52																										
DCV 80	101   3.98	119   4.69	1/4" BSP	83   3.27																										

(1) **CSA.** = Aluminium version (only DCV50 - DCV80)

# Working sections
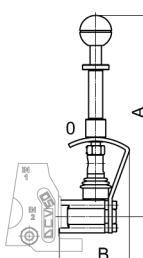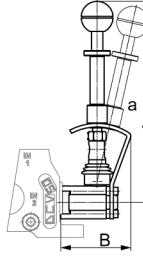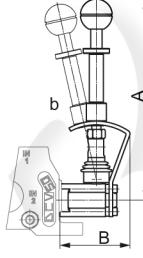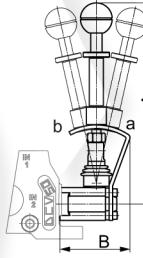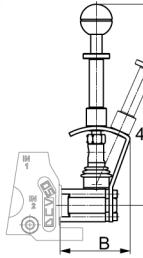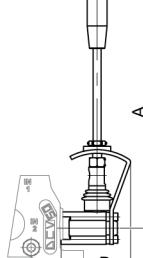
## CS\*\* Spool control handle side

**	Description	Drawing																
<b>CS5 CSA5 (1)</b>	Safety handle locked in neutral position	 	<table border="1"> <thead> <tr> <th></th> <th>A mm inch</th> <th>B mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 50</b></td> <td>220 8.66</td> <td>81 3.19</td> </tr> <tr> <td><b>DCV 80</b></td> <td>245 9.65</td> <td>102 4.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>260 10.24</td> <td>119.5 4.70</td> </tr> </tbody> </table>		A mm inch	B mm inch	<b>DCV 30</b>	200 7.87	73 2.87	<b>DCV 50</b>	220 8.66	81 3.19	<b>DCV 80</b>	245 9.65	102 4.02	<b>DCV MG</b>	260 10.24	119.5 4.70
	A mm inch	B mm inch																
<b>DCV 30</b>	200 7.87	73 2.87																
<b>DCV 50</b>	220 8.66	81 3.19																
<b>DCV 80</b>	245 9.65	102 4.02																
<b>DCV MG</b>	260 10.24	119.5 4.70																
<b>CS6 CSA6 (1)</b>	Safety handle locked in position "a"	 	<table border="1"> <thead> <tr> <th></th> <th>A mm inch</th> <th>B mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 50</b></td> <td>220 8.66</td> <td>81 3.19</td> </tr> <tr> <td><b>DCV 80</b></td> <td>245 9.65</td> <td>102 4.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>260 10.24</td> <td>119.5 4.70</td> </tr> </tbody> </table>		A mm inch	B mm inch	<b>DCV 30</b>	200 7.87	73 2.87	<b>DCV 50</b>	220 8.66	81 3.19	<b>DCV 80</b>	245 9.65	102 4.02	<b>DCV MG</b>	260 10.24	119.5 4.70
	A mm inch	B mm inch																
<b>DCV 30</b>	200 7.87	73 2.87																
<b>DCV 50</b>	220 8.66	81 3.19																
<b>DCV 80</b>	245 9.65	102 4.02																
<b>DCV MG</b>	260 10.24	119.5 4.70																
<b>CS7 CSA7 (1)</b>	Security handle locked in position "b"	 	<table border="1"> <thead> <tr> <th></th> <th>A mm inch</th> <th>B mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 50</b></td> <td>220 8.66</td> <td>81 3.19</td> </tr> <tr> <td><b>DCV 80</b></td> <td>245 9.65</td> <td>102 4.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>260 10.24</td> <td>119.5 4.70</td> </tr> </tbody> </table>		A mm inch	B mm inch	<b>DCV 30</b>	200 7.87	73 2.87	<b>DCV 50</b>	220 8.66	81 3.19	<b>DCV 80</b>	245 9.65	102 4.02	<b>DCV MG</b>	260 10.24	119.5 4.70
	A mm inch	B mm inch																
<b>DCV 30</b>	200 7.87	73 2.87																
<b>DCV 50</b>	220 8.66	81 3.19																
<b>DCV 80</b>	245 9.65	102 4.02																
<b>DCV MG</b>	260 10.24	119.5 4.70																
<b>CS8 CSA8 (1)</b>	Security handle locked in position "a" and "b"	 	<table border="1"> <thead> <tr> <th></th> <th>A mm inch</th> <th>B mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 50</b></td> <td>220 8.66</td> <td>81 3.19</td> </tr> <tr> <td><b>DCV 80</b></td> <td>245 9.65</td> <td>102 4.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>260 10.24</td> <td>119.5 4.70</td> </tr> </tbody> </table>		A mm inch	B mm inch	<b>DCV 30</b>	200 7.87	73 2.87	<b>DCV 50</b>	220 8.66	81 3.19	<b>DCV 80</b>	245 9.65	102 4.02	<b>DCV MG</b>	260 10.24	119.5 4.70
	A mm inch	B mm inch																
<b>DCV 30</b>	200 7.87	73 2.87																
<b>DCV 50</b>	220 8.66	81 3.19																
<b>DCV 80</b>	245 9.65	102 4.02																
<b>DCV MG</b>	260 10.24	119.5 4.70																
<b>CS9 CSA9 (1)</b>	Security handle locked in 4th position	 	<table border="1"> <thead> <tr> <th></th> <th>A mm inch</th> <th>B mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>200 7.87</td> <td>73 2.87</td> </tr> <tr> <td><b>DCV 50</b></td> <td>220 8.66</td> <td>81 3.19</td> </tr> <tr> <td><b>DCV 80</b></td> <td>245 9.65</td> <td>102 4.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>260 10.24</td> <td>119.5 4.70</td> </tr> </tbody> </table>		A mm inch	B mm inch	<b>DCV 30</b>	200 7.87	73 2.87	<b>DCV 50</b>	220 8.66	81 3.19	<b>DCV 80</b>	245 9.65	102 4.02	<b>DCV MG</b>	260 10.24	119.5 4.70
	A mm inch	B mm inch																
<b>DCV 30</b>	200 7.87	73 2.87																
<b>DCV 50</b>	220 8.66	81 3.19																
<b>DCV 80</b>	245 9.65	102 4.02																
<b>DCV MG</b>	260 10.24	119.5 4.70																
<b>CS40 CSA40 (1)</b>	Lever with clutch	 	<table border="1"> <thead> <tr> <th></th> <th>A mm inch</th> <th>B mm inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 50</b></td> <td>269 10.59</td> <td>77 3.03</td> </tr> <tr> <td><b>DCV 80</b></td> <td>284 11.18</td> <td>102 4.01</td> </tr> <tr> <td><b>DCV MG</b></td> <td>299 11.77</td> <td>119.5 4.70</td> </tr> </tbody> </table>		A mm inch	B mm inch	<b>DCV 50</b>	269 10.59	77 3.03	<b>DCV 80</b>	284 11.18	102 4.01	<b>DCV MG</b>	299 11.77	119.5 4.70			
	A mm inch	B mm inch																
<b>DCV 50</b>	269 10.59	77 3.03																
<b>DCV 80</b>	284 11.18	102 4.01																
<b>DCV MG</b>	299 11.77	119.5 4.70																

(1) **CSA.** = Aluminium version (only DCV50 - DCV80)

# Working sections

## CS\*\* Spool control handle side

**	Description	Drawing																										
CS12 (CX) (1)	Cloche control at 90° with fulcrum on the upstream for left inlet section and downstream for right inlet section (not available on DCV MG)	<p>B O A</p> <p>B O A</p>	<table border="1"> <thead> <tr> <th></th> <th>L mm</th> <th>L inch</th> <th>D mm</th> <th>D inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>285</td> <td>11.22</td> <td>3.5</td> <td>0.13</td> </tr> <tr> <td><b>DCV 50</b></td> <td>290</td> <td>11.42</td> <td>3</td> <td>0.11</td> </tr> <tr> <td><b>DCV 80</b></td> <td>308.5</td> <td>12.15</td> <td>4</td> <td>0.15</td> </tr> <tr> <td><b>DCV MG</b></td> <td>324</td> <td>12.76</td> <td>0</td> <td>0</td> </tr> </tbody> </table>		L mm	L inch	D mm	D inch	<b>DCV 30</b>	285	11.22	3.5	0.13	<b>DCV 50</b>	290	11.42	3	0.11	<b>DCV 80</b>	308.5	12.15	4	0.15	<b>DCV MG</b>	324	12.76	0	0
	L mm	L inch	D mm	D inch																								
<b>DCV 30</b>	285	11.22	3.5	0.13																								
<b>DCV 50</b>	290	11.42	3	0.11																								
<b>DCV 80</b>	308.5	12.15	4	0.15																								
<b>DCV MG</b>	324	12.76	0	0																								
CS13 (CX) (1)	Cloche control at 90° with fulcrum on the downstream for left inlet section and upstream for right inlet section (not available on DCV MG)	<p>B O A</p> <p>B O A</p>	<table border="1"> <thead> <tr> <th></th> <th>L mm</th> <th>L inch</th> <th>D mm</th> <th>D inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>285</td> <td>11.22</td> <td>3.5</td> <td>0.13</td> </tr> <tr> <td><b>DCV 50</b></td> <td>290</td> <td>11.42</td> <td>3</td> <td>0.11</td> </tr> <tr> <td><b>DCV 80</b></td> <td>308.5</td> <td>12.15</td> <td>4</td> <td>0.15</td> </tr> <tr> <td><b>DCV MG</b></td> <td>324</td> <td>12.76</td> <td>0</td> <td>0</td> </tr> </tbody> </table>		L mm	L inch	D mm	D inch	<b>DCV 30</b>	285	11.22	3.5	0.13	<b>DCV 50</b>	290	11.42	3	0.11	<b>DCV 80</b>	308.5	12.15	4	0.15	<b>DCV MG</b>	324	12.76	0	0
	L mm	L inch	D mm	D inch																								
<b>DCV 30</b>	285	11.22	3.5	0.13																								
<b>DCV 50</b>	290	11.42	3	0.11																								
<b>DCV 80</b>	308.5	12.15	4	0.15																								
<b>DCV MG</b>	324	12.76	0	0																								
CS14	Flexible cable control	<p>B O A</p>	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>285</td> <td>11.22</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV 50</b></td> <td>290</td> <td>11.42</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV 80</b></td> <td>308.5</td> <td>12.15</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV MG</b></td> <td>324</td> <td>12.76</td> <td>(2)</td> <td>(2)</td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 30</b>	285	11.22	(2)	(2)	<b>DCV 50</b>	290	11.42	(2)	(2)	<b>DCV 80</b>	308.5	12.15	(2)	(2)	<b>DCV MG</b>	324	12.76	(2)	(2)
	A mm	A inch	B mm	B inch																								
<b>DCV 30</b>	285	11.22	(2)	(2)																								
<b>DCV 50</b>	290	11.42	(2)	(2)																								
<b>DCV 80</b>	308.5	12.15	(2)	(2)																								
<b>DCV MG</b>	324	12.76	(2)	(2)																								
CS15 CSA15 (3)	Spool stroke adjustment	<p>B O A</p>	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>78</td> <td>3.07</td> </tr> <tr> <td><b>DCV 50</b></td> <td>82</td> <td>3.23</td> </tr> <tr> <td><b>DCV 80</b></td> <td>99.5</td> <td>99.5</td> </tr> <tr> <td><b>DCV MG</b></td> <td>112</td> <td>4.41</td> </tr> </tbody> </table>		A mm	A inch	<b>DCV 30</b>	78	3.07	<b>DCV 50</b>	82	3.23	<b>DCV 80</b>	99.5	99.5	<b>DCV MG</b>	112	4.41										
	A mm	A inch																										
<b>DCV 30</b>	78	3.07																										
<b>DCV 50</b>	82	3.23																										
<b>DCV 80</b>	99.5	99.5																										
<b>DCV MG</b>	112	4.41																										
CS16 CSA16 (3)	Spool stroke adjustment, handle at 180°	<p>B O A</p>	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>78</td> <td>3.07</td> </tr> <tr> <td><b>DCV 50</b></td> <td>82</td> <td>3.23</td> </tr> <tr> <td><b>DCV 80</b></td> <td>99.5</td> <td>99.5</td> </tr> <tr> <td><b>DCV MG</b></td> <td>112</td> <td>4.41</td> </tr> </tbody> </table>		A mm	A inch	<b>DCV 30</b>	78	3.07	<b>DCV 50</b>	82	3.23	<b>DCV 80</b>	99.5	99.5	<b>DCV MG</b>	112	4.41										
	A mm	A inch																										
<b>DCV 30</b>	78	3.07																										
<b>DCV 50</b>	82	3.23																										
<b>DCV 80</b>	99.5	99.5																										
<b>DCV MG</b>	112	4.41																										


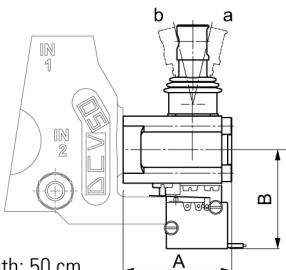
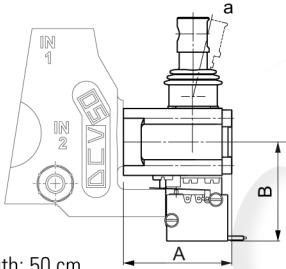

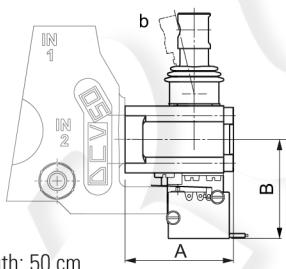

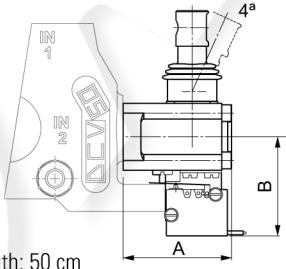

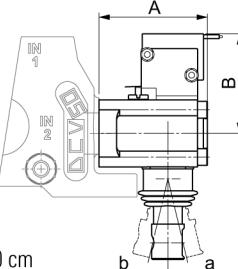
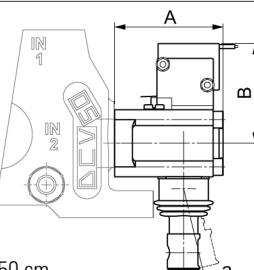
(1) (CX) code required to use on 2th section

(2) Length cable and control, contact our commercial dept

(3) **CSA.** = Aluminium version (only DCV50 - DCV80)

# Working sections





## CS\*\* Spool control handle side

**	Description	Drawing																																																			
<b>CS17 CSA17 (1)</b>	Standard handle with microswitch in "a" and "b"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C  	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS17</th> <th>CSA17</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> </tr> <tr> <td></td> <td></td> <td></td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td>53</td> <td>2.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS17	CSA17	mm	inch	<b>DCV 30</b>	55	2.17	—	—	<b>DCV 50</b>	62.5	2.46	67.5	2.66	<b>DCV 80</b>	74	2.91	79.5	3.13	<b>DCV MG</b>	90	3.54	—	—				50.5	1.99				51.5	2.03				53	2.09				58	2.28
	<b>A</b>		<b>B</b>																																																		
	CS17	CSA17	mm	inch																																																	
<b>DCV 30</b>	55	2.17	—	—																																																	
<b>DCV 50</b>	62.5	2.46	67.5	2.66																																																	
<b>DCV 80</b>	74	2.91	79.5	3.13																																																	
<b>DCV MG</b>	90	3.54	—	—																																																	
			50.5	1.99																																																	
			51.5	2.03																																																	
			53	2.09																																																	
			58	2.28																																																	
<b>CS18 CSA18 (1)</b>	Standard handle with microswitch in "a"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C  	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS18</th> <th>CSA18</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> </tr> <tr> <td></td> <td></td> <td></td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td>53</td> <td>2.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS18	CSA18	mm	inch	<b>DCV 30</b>	55	2.17	—	—	<b>DCV 50</b>	62.5	2.46	67.5	2.66	<b>DCV 80</b>	74	2.91	79.5	3.13	<b>DCV MG</b>	90	3.54	—	—				50.5	1.99				51.5	2.03				53	2.09				58	2.28
	<b>A</b>		<b>B</b>																																																		
	CS18	CSA18	mm	inch																																																	
<b>DCV 30</b>	55	2.17	—	—																																																	
<b>DCV 50</b>	62.5	2.46	67.5	2.66																																																	
<b>DCV 80</b>	74	2.91	79.5	3.13																																																	
<b>DCV MG</b>	90	3.54	—	—																																																	
			50.5	1.99																																																	
			51.5	2.03																																																	
			53	2.09																																																	
			58	2.28																																																	
<b>CS19 CSA19 (1)</b>	Standard handle with microswitch in "b"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C  	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS19</th> <th>CSA19</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> </tr> <tr> <td></td> <td></td> <td></td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td>53</td> <td>2.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS19	CSA19	mm	inch	<b>DCV 30</b>	55	2.17	—	—	<b>DCV 50</b>	62.5	2.46	67.5	2.66	<b>DCV 80</b>	74	2.91	79.5	3.13	<b>DCV MG</b>	90	3.54	—	—				50.5	1.99				51.5	2.03				53	2.09				58	2.28
	<b>A</b>		<b>B</b>																																																		
	CS19	CSA19	mm	inch																																																	
<b>DCV 30</b>	55	2.17	—	—																																																	
<b>DCV 50</b>	62.5	2.46	67.5	2.66																																																	
<b>DCV 80</b>	74	2.91	79.5	3.13																																																	
<b>DCV MG</b>	90	3.54	—	—																																																	
			50.5	1.99																																																	
			51.5	2.03																																																	
			53	2.09																																																	
			58	2.28																																																	
<b>CS20 CSA20 (1)</b>	Standard handle with microswitch in 4th position  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C  	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS20</th> <th>CSA20</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> </tr> <tr> <td></td> <td></td> <td></td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td>53</td> <td>2.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS20	CSA20	mm	inch	<b>DCV 30</b>	55	2.17	—	—	<b>DCV 50</b>	62.5	2.46	67.5	2.66	<b>DCV 80</b>	74	2.91	79.5	3.13	<b>DCV MG</b>	90	3.54	—	—				50.5	1.99				51.5	2.03				53	2.09				58	2.28
	<b>A</b>		<b>B</b>																																																		
	CS20	CSA20	mm	inch																																																	
<b>DCV 30</b>	55	2.17	—	—																																																	
<b>DCV 50</b>	62.5	2.46	67.5	2.66																																																	
<b>DCV 80</b>	74	2.91	79.5	3.13																																																	
<b>DCV MG</b>	90	3.54	—	—																																																	
			50.5	1.99																																																	
			51.5	2.03																																																	
			53	2.09																																																	
			58	2.28																																																	
<b>CS21 CSA21 (1)</b>	Handle 180° with microswitch in "a" and "b"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C  	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS21</th> <th>CSA21</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> </tr> <tr> <td></td> <td></td> <td></td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td>53</td> <td>2.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS21	CSA21	mm	inch	<b>DCV 30</b>	55	2.17	—	—	<b>DCV 50</b>	62.5	2.46	67.5	2.66	<b>DCV 80</b>	74	2.91	79.5	3.13	<b>DCV MG</b>	90	3.54	—	—				50.5	1.99				51.5	2.03				53	2.09				58	2.28
	<b>A</b>		<b>B</b>																																																		
	CS21	CSA21	mm	inch																																																	
<b>DCV 30</b>	55	2.17	—	—																																																	
<b>DCV 50</b>	62.5	2.46	67.5	2.66																																																	
<b>DCV 80</b>	74	2.91	79.5	3.13																																																	
<b>DCV MG</b>	90	3.54	—	—																																																	
			50.5	1.99																																																	
			51.5	2.03																																																	
			53	2.09																																																	
			58	2.28																																																	
<b>CS22 CSA22 (1)</b>	Handle 180° with microswitch in "a"  Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C  	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> <th colspan="2"><b>B</b></th> </tr> <tr> <th></th> <th>CS22</th> <th>CSA22</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> </tr> <tr> <td></td> <td></td> <td></td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td>53</td> <td>2.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		<b>A</b>		<b>B</b>			CS22	CSA22	mm	inch	<b>DCV 30</b>	55	2.17	—	—	<b>DCV 50</b>	62.5	2.46	67.5	2.66	<b>DCV 80</b>	74	2.91	79.5	3.13	<b>DCV MG</b>	90	3.54	—	—				50.5	1.99				51.5	2.03				53	2.09				58	2.28
	<b>A</b>		<b>B</b>																																																		
	CS22	CSA22	mm	inch																																																	
<b>DCV 30</b>	55	2.17	—	—																																																	
<b>DCV 50</b>	62.5	2.46	67.5	2.66																																																	
<b>DCV 80</b>	74	2.91	79.5	3.13																																																	
<b>DCV MG</b>	90	3.54	—	—																																																	
			50.5	1.99																																																	
			51.5	2.03																																																	
			53	2.09																																																	
			58	2.28																																																	

(1) **CSA.** = Aluminium version (only DCV50 - DCV80)


# Working sections
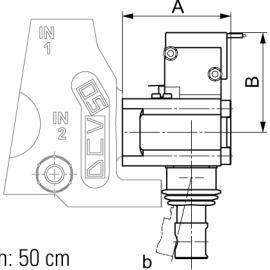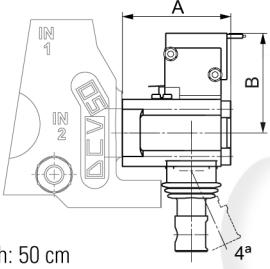
## CS\*\* Spool control handle side

**	Description	Drawing																																								
<b>CS23 CSA23 (1)</b>	<p>Handle 180° with microswitch in "b"            Protection degree: IP67            Nominal rating: 0.1 ÷ 10 A / 250VAC            Minimum rating: 1 mA / 4 VDC            Operating temperature: -20 ÷ +85°C</p> 	 <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>CS23</th> <th>CSA23</th> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> <td>53</td> <td>2.09</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		A		B		CS23	CSA23	mm	inch	mm	inch	<b>DCV 30</b>	55	2.17	—	—	50.5	1.99	<b>DCV 50</b>	62.5	2.46	67.5	2.66	51.5	2.03	<b>DCV 80</b>	74	2.91	79.5	3.13	53	2.09	<b>DCV MG</b>	90	3.54	—	—	58	2.28
	A		B																																							
	CS23	CSA23	mm	inch	mm	inch																																				
<b>DCV 30</b>	55	2.17	—	—	50.5	1.99																																				
<b>DCV 50</b>	62.5	2.46	67.5	2.66	51.5	2.03																																				
<b>DCV 80</b>	74	2.91	79.5	3.13	53	2.09																																				
<b>DCV MG</b>	90	3.54	—	—	58	2.28																																				
<b>CS24 CSA24 (1)</b>	<p>Handle 180° with microswitch in 4th position            Protection degree: IP67            Nominal rating: 0.1 ÷ 10 A / 250VAC            Minimum rating: 1 mA / 4 VDC            Operating temperature: -20 ÷ +85°C</p> 	 <p>Cable length: 50 cm</p>	<table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="2">A</th> <th colspan="2">B</th> </tr> <tr> <th>CS24</th> <th>CSA24</th> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>55</td> <td>2.17</td> <td>—</td> <td>—</td> <td>50.5</td> <td>1.99</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62.5</td> <td>2.46</td> <td>67.5</td> <td>2.66</td> <td>51.5</td> <td>2.03</td> </tr> <tr> <td><b>DCV 80</b></td> <td>74</td> <td>2.91</td> <td>79.5</td> <td>3.13</td> <td>53</td> <td>2.09</td> </tr> <tr> <td><b>DCV MG</b></td> <td>90</td> <td>3.54</td> <td>—</td> <td>—</td> <td>58</td> <td>2.28</td> </tr> </tbody> </table>		A		B		CS24	CSA24	mm	inch	mm	inch	<b>DCV 30</b>	55	2.17	—	—	50.5	1.99	<b>DCV 50</b>	62.5	2.46	67.5	2.66	51.5	2.03	<b>DCV 80</b>	74	2.91	79.5	3.13	53	2.09	<b>DCV MG</b>	90	3.54	—	—	58	2.28
	A		B																																							
	CS24	CSA24	mm	inch	mm	inch																																				
<b>DCV 30</b>	55	2.17	—	—	50.5	1.99																																				
<b>DCV 50</b>	62.5	2.46	67.5	2.66	51.5	2.03																																				
<b>DCV 80</b>	74	2.91	79.5	3.13	53	2.09																																				
<b>DCV MG</b>	90	3.54	—	—	58	2.28																																				

(1) **CSA.** = Aluminium version (only DCV50 - DCV80)

# Working sections

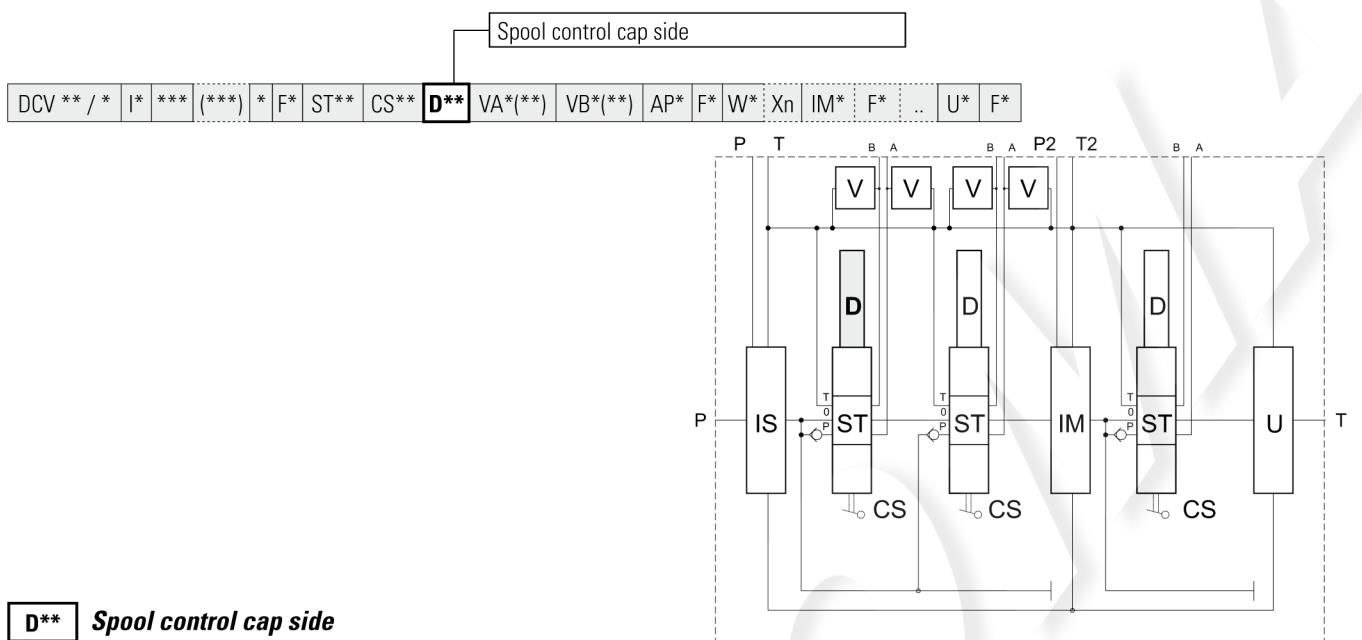

## D\*\* Spool control cap side

**	Description	Drawing																															
<b>D1 DA1</b> (1)	3 positions, spring centred spool  [V] B 0 A		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>D1</th> <th>DA1</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>36.5</td> <td>1.03</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>41.5</td> <td>1.63</td> <td>42</td> <td>1.65</td> </tr> <tr> <td><b>DCV 80</b></td> <td>58</td> <td>2.28</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV MG</b></td> <td>65</td> <td>2.56</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		<b>A</b>			D1	DA1	mm	inch	mm	inch	<b>DCV 30</b>	36.5	1.03	—	—	<b>DCV 50</b>	41.5	1.63	42	1.65	<b>DCV 80</b>	58	2.28	—	—	<b>DCV MG</b>	65	2.56	—	—
	<b>A</b>																																
	D1	DA1																															
mm	inch	mm	inch																														
<b>DCV 30</b>	36.5	1.03	—	—																													
<b>DCV 50</b>	41.5	1.63	42	1.65																													
<b>DCV 80</b>	58	2.28	—	—																													
<b>DCV MG</b>	65	2.56	—	—																													
<b>D2 DA2</b> (1)	3 positions, spring centred spool, detent in "a" and "b"  B 1 A [V] B 0 A		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>D2</th> <th>DA2</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		<b>A</b>			D2	DA2	mm	inch	mm	inch	<b>DCV 30</b>	63.5	2.5	—	—	<b>DCV 50</b>	72.5	2.85	72.5	2.85	<b>DCV 80</b>	91	3.58	—	—	<b>DCV MG</b>	110	4.33	—	—
	<b>A</b>																																
	D2	DA2																															
mm	inch	mm	inch																														
<b>DCV 30</b>	63.5	2.5	—	—																													
<b>DCV 50</b>	72.5	2.85	72.5	2.85																													
<b>DCV 80</b>	91	3.58	—	—																													
<b>DCV MG</b>	110	4.33	—	—																													
<b>D3 DA3</b> (1)	3 positions, spring centred spool, detent in "a"  1 A [V] B 0 A		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>D3</th> <th>DA3</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		<b>A</b>			D3	DA3	mm	inch	mm	inch	<b>DCV 30</b>	63.5	2.5	—	—	<b>DCV 50</b>	72.5	2.85	72.5	2.85	<b>DCV 80</b>	91	3.58	—	—	<b>DCV MG</b>	110	4.33	—	—
	<b>A</b>																																
	D3	DA3																															
mm	inch	mm	inch																														
<b>DCV 30</b>	63.5	2.5	—	—																													
<b>DCV 50</b>	72.5	2.85	72.5	2.85																													
<b>DCV 80</b>	91	3.58	—	—																													
<b>DCV MG</b>	110	4.33	—	—																													
<b>D4 DA4</b> (1)	3 positions, spring centred spool, detent in "b"  B 1 [V] B 0 A		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>D4</th> <th>DA4</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		<b>A</b>			D4	DA4	mm	inch	mm	inch	<b>DCV 30</b>	63.5	2.5	—	—	<b>DCV 50</b>	72.5	2.85	72.5	2.85	<b>DCV 80</b>	91	3.58	—	—	<b>DCV MG</b>	110	4.33	—	—
	<b>A</b>																																
	D4	DA4																															
mm	inch	mm	inch																														
<b>DCV 30</b>	63.5	2.5	—	—																													
<b>DCV 50</b>	72.5	2.85	72.5	2.85																													
<b>DCV 80</b>	91	3.58	—	—																													
<b>DCV MG</b>	110	4.33	—	—																													
<b>D5 DA5</b> (1)	4 positions, spring centred spool, detent in 4th position  1 4a [V] B 0 A 4a		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th>D5</th> <th>DA2</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> <td>—</td> <td>—</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		<b>A</b>			D5	DA2	mm	inch	mm	inch	<b>DCV 30</b>	63.5	2.5	—	—	<b>DCV 50</b>	72.5	2.85	72.5	2.85	<b>DCV 80</b>	91	3.58	—	—	<b>DCV MG</b>	110	4.33	—	—
	<b>A</b>																																
	D5	DA2																															
mm	inch	mm	inch																														
<b>DCV 30</b>	63.5	2.5	—	—																													
<b>DCV 50</b>	72.5	2.85	72.5	2.85																													
<b>DCV 80</b>	91	3.58	—	—																													
<b>DCV MG</b>	110	4.33	—	—																													

(1) DA. = Aluminium version (only DCV50 - DCV80)

# Working sections

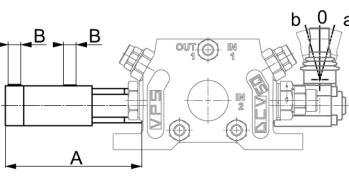
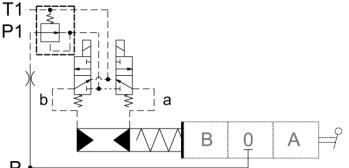
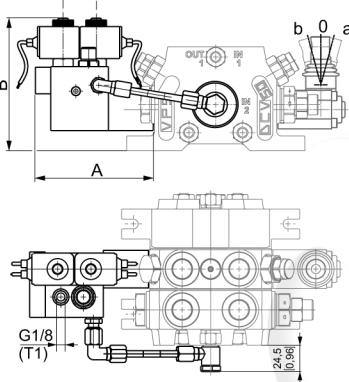
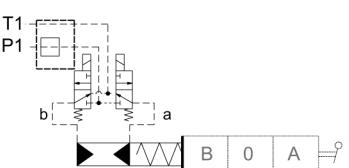
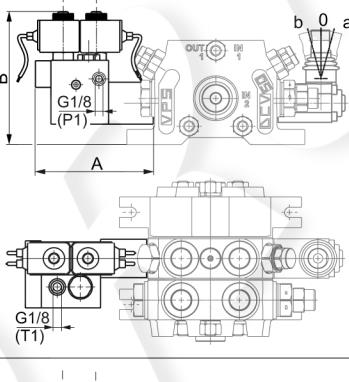
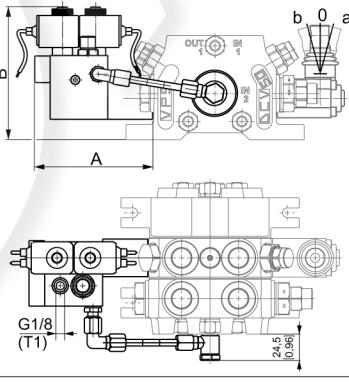
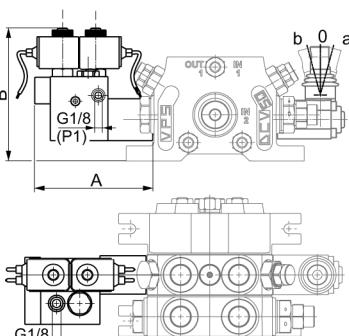
## D\*\* Spool control cap side

**	Description	Drawing																			
<b>D6 DA6 (1)</b>	4 positions, spring centred spool, sensitive 4th position, without detent  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D6</b> mm</th> <th><b>DA6</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> </tr> </tbody> </table>		<b>A</b>			<b>D6</b> mm	<b>DA6</b> inch	<b>DCV 30</b>	63.5	2.5	<b>DCV 50</b>	72.5	2.85	<b>DCV 80</b>	91	3.58	<b>DCV MG</b>	110	4.33
	<b>A</b>																				
	<b>D6</b> mm	<b>DA6</b> inch																			
<b>DCV 30</b>	63.5	2.5																			
<b>DCV 50</b>	72.5	2.85																			
<b>DCV 80</b>	91	3.58																			
<b>DCV MG</b>	110	4.33																			
<b>D7 DA7 (1)</b>	3 positions, spring centred spool, detent in "a" - "0" - "b"  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D7</b> mm</th> <th><b>DA7</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>36.5</td> <td>1.03</td> </tr> <tr> <td><b>DCV 50</b></td> <td>41.5</td> <td>1.63</td> </tr> <tr> <td><b>DCV 80</b></td> <td>58</td> <td>2.28</td> </tr> <tr> <td><b>DCV MG</b></td> <td>65</td> <td>2.56</td> </tr> </tbody> </table>		<b>A</b>			<b>D7</b> mm	<b>DA7</b> inch	<b>DCV 30</b>	36.5	1.03	<b>DCV 50</b>	41.5	1.63	<b>DCV 80</b>	58	2.28	<b>DCV MG</b>	65	2.56
	<b>A</b>																				
	<b>D7</b> mm	<b>DA7</b> inch																			
<b>DCV 30</b>	36.5	1.03																			
<b>DCV 50</b>	41.5	1.63																			
<b>DCV 80</b>	58	2.28																			
<b>DCV MG</b>	65	2.56																			
<b>D8 DA8 (1)</b>	2 positions ("0" - "b"), spring centred spool  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D8</b> mm</th> <th><b>DA8</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>36.5</td> <td>1.03</td> </tr> <tr> <td><b>DCV 50</b></td> <td>41.5</td> <td>1.63</td> </tr> <tr> <td><b>DCV 80</b></td> <td>58</td> <td>2.28</td> </tr> <tr> <td><b>DCV MG</b></td> <td>65</td> <td>2.56</td> </tr> </tbody> </table>		<b>A</b>			<b>D8</b> mm	<b>DA8</b> inch	<b>DCV 30</b>	36.5	1.03	<b>DCV 50</b>	41.5	1.63	<b>DCV 80</b>	58	2.28	<b>DCV MG</b>	65	2.56
	<b>A</b>																				
	<b>D8</b> mm	<b>DA8</b> inch																			
<b>DCV 30</b>	36.5	1.03																			
<b>DCV 50</b>	41.5	1.63																			
<b>DCV 80</b>	58	2.28																			
<b>DCV MG</b>	65	2.56																			
<b>D9 DA9 (1)</b>	2 positions ("0" - "a"), spring centred spool  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D9</b> mm</th> <th><b>DA9</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>36.5</td> <td>1.03</td> </tr> <tr> <td><b>DCV 50</b></td> <td>41.5</td> <td>1.63</td> </tr> <tr> <td><b>DCV 80</b></td> <td>58</td> <td>2.28</td> </tr> <tr> <td><b>DCV MG</b></td> <td>65</td> <td>2.56</td> </tr> </tbody> </table>		<b>A</b>			<b>D9</b> mm	<b>DA9</b> inch	<b>DCV 30</b>	36.5	1.03	<b>DCV 50</b>	41.5	1.63	<b>DCV 80</b>	58	2.28	<b>DCV MG</b>	65	2.56
	<b>A</b>																				
	<b>D9</b> mm	<b>DA9</b> inch																			
<b>DCV 30</b>	36.5	1.03																			
<b>DCV 50</b>	41.5	1.63																			
<b>DCV 80</b>	58	2.28																			
<b>DCV MG</b>	65	2.56																			
<b>D10 DA10 (1)</b>	2 positions ("0" - "b"), spring centred spool, detent in "b"  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D10</b> mm</th> <th><b>DA10</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> </tr> </tbody> </table>		<b>A</b>			<b>D10</b> mm	<b>DA10</b> inch	<b>DCV 30</b>	63.5	2.5	<b>DCV 50</b>	72.5	2.85	<b>DCV 80</b>	91	3.58	<b>DCV MG</b>	110	4.33
	<b>A</b>																				
	<b>D10</b> mm	<b>DA10</b> inch																			
<b>DCV 30</b>	63.5	2.5																			
<b>DCV 50</b>	72.5	2.85																			
<b>DCV 80</b>	91	3.58																			
<b>DCV MG</b>	110	4.33																			
<b>D11 DA11 (1)</b>	2 positions ("0" - "a"), spring centred spool, detent in "a"  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D11</b> mm</th> <th><b>DA11</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>63.5</td> <td>2.5</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72.5</td> <td>2.85</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> </tr> </tbody> </table>		<b>A</b>			<b>D11</b> mm	<b>DA11</b> inch	<b>DCV 30</b>	63.5	2.5	<b>DCV 50</b>	72.5	2.85	<b>DCV 80</b>	91	3.58	<b>DCV MG</b>	110	4.33
	<b>A</b>																				
	<b>D11</b> mm	<b>DA11</b> inch																			
<b>DCV 30</b>	63.5	2.5																			
<b>DCV 50</b>	72.5	2.85																			
<b>DCV 80</b>	91	3.58																			
<b>DCV MG</b>	110	4.33																			
<b>D12 DA12 (1)</b>	3 positions free (without spring)  		<table border="1"> <thead> <tr> <th></th> <th colspan="2"><b>A</b></th> </tr> <tr> <th></th> <th><b>D12</b> mm</th> <th><b>DA12</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>36.5</td> <td>1.03</td> </tr> <tr> <td><b>DCV 50</b></td> <td>41.5</td> <td>1.63</td> </tr> <tr> <td><b>DCV 80</b></td> <td>58</td> <td>2.28</td> </tr> <tr> <td><b>DCV MG</b></td> <td>65</td> <td>2.56</td> </tr> </tbody> </table>		<b>A</b>			<b>D12</b> mm	<b>DA12</b> inch	<b>DCV 30</b>	36.5	1.03	<b>DCV 50</b>	41.5	1.63	<b>DCV 80</b>	58	2.28	<b>DCV MG</b>	65	2.56
	<b>A</b>																				
	<b>D12</b> mm	<b>DA12</b> inch																			
<b>DCV 30</b>	36.5	1.03																			
<b>DCV 50</b>	41.5	1.63																			
<b>DCV 80</b>	58	2.28																			
<b>DCV MG</b>	65	2.56																			
<b>D13 DA13 (1)</b>	Preearranged for double control  		<table border="1"> <thead> <tr> <th></th> <th><b>A</b> mm</th> <th><b>B</b> inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>58</td> <td>2.28</td> </tr> <tr> <td><b>DCV 50</b></td> <td>71</td> <td>2.80</td> </tr> <tr> <td><b>DCV 80</b></td> <td>99</td> <td>3.90</td> </tr> <tr> <td><b>DCV MG</b></td> <td>103.5</td> <td>4.07</td> </tr> </tbody> </table>		<b>A</b> mm	<b>B</b> inch	<b>DCV 30</b>	58	2.28	<b>DCV 50</b>	71	2.80	<b>DCV 80</b>	99	3.90	<b>DCV MG</b>	103.5	4.07			
	<b>A</b> mm	<b>B</b> inch																			
<b>DCV 30</b>	58	2.28																			
<b>DCV 50</b>	71	2.80																			
<b>DCV 80</b>	99	3.90																			
<b>DCV MG</b>	103.5	4.07																			

(1) DA = Aluminium version (only DCV50 - DCV80)

# Working sections




## D\*\* Spool control cap side

**	Description	Drawing																										
D14	ON-OFF pneumatic control - Pilot pressure 5-10 bar 72.5-145 psi	 	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>111</td> <td>4.37</td> <td>1/8" BSP</td> <td></td> </tr> <tr> <td><b>DCV 50</b></td> <td>119.5</td> <td>4.70</td> <td>1/8" BSP</td> <td></td> </tr> <tr> <td><b>DCV 80</b></td> <td>143</td> <td>5.63</td> <td>1/8" BSP</td> <td></td> </tr> <tr> <td><b>DCV MG</b></td> <td>148</td> <td>5.83</td> <td>1/8" BSP</td> <td></td> </tr> </tbody> </table>		A mm	A inch	B mm	B inch	<b>DCV 30</b>	111	4.37	1/8" BSP		<b>DCV 50</b>	119.5	4.70	1/8" BSP		<b>DCV 80</b>	143	5.63	1/8" BSP		<b>DCV MG</b>	148	5.83	1/8" BSP	
	A mm	A inch	B mm	B inch																								
<b>DCV 30</b>	111	4.37	1/8" BSP																									
<b>DCV 50</b>	119.5	4.70	1/8" BSP																									
<b>DCV 80</b>	143	5.63	1/8" BSP																									
<b>DCV MG</b>	148	5.83	1/8" BSP																									
D15 (1)	Electroidraulic ON-OFF control. Voltage 12Vdc with pressure reducing valve - Pilot pressure 20 bar 290 psi	 	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>105.5</td> <td>4.15</td> <td>122</td> <td>4.80</td> </tr> <tr> <td><b>DCV 50</b></td> <td>110.5</td> <td>4.35</td> <td>124</td> <td>4.88</td> </tr> <tr> <td><b>DCV 80</b></td> <td>127</td> <td>5.00</td> <td>127.5</td> <td>5.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>131</td> <td>5.16</td> <td>134.5</td> <td>5.30</td> </tr> </tbody> </table> <p>Connector wires 30 cm Protection degree IP65 Ambient temperature -30 +60 °C Power 7 W Resistance at 20 °C 14 ohm</p>		A mm	A inch	B mm	B inch	<b>DCV 30</b>	105.5	4.15	122	4.80	<b>DCV 50</b>	110.5	4.35	124	4.88	<b>DCV 80</b>	127	5.00	127.5	5.02	<b>DCV MG</b>	131	5.16	134.5	5.30
	A mm	A inch	B mm	B inch																								
<b>DCV 30</b>	105.5	4.15	122	4.80																								
<b>DCV 50</b>	110.5	4.35	124	4.88																								
<b>DCV 80</b>	127	5.00	127.5	5.02																								
<b>DCV MG</b>	131	5.16	134.5	5.30																								
D16 (1)	Electroidraulic ON-OFF control. Voltage 12Vdc without pressure reducing valve - Pilot pressure 20 bar 290 psi	 	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>105.5</td> <td>4.15</td> <td>122</td> <td>4.80</td> </tr> <tr> <td><b>DCV 50</b></td> <td>110.5</td> <td>4.35</td> <td>124</td> <td>4.88</td> </tr> <tr> <td><b>DCV 80</b></td> <td>127</td> <td>5.00</td> <td>127.5</td> <td>5.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>131</td> <td>5.16</td> <td>134.5</td> <td>5.30</td> </tr> </tbody> </table> <p>Connector wires 30 cm Protection degree IP65 Ambient temperature -30 +60 °C Power 7 W Resistance at 20 °C 14 ohm</p>		A mm	A inch	B mm	B inch	<b>DCV 30</b>	105.5	4.15	122	4.80	<b>DCV 50</b>	110.5	4.35	124	4.88	<b>DCV 80</b>	127	5.00	127.5	5.02	<b>DCV MG</b>	131	5.16	134.5	5.30
	A mm	A inch	B mm	B inch																								
<b>DCV 30</b>	105.5	4.15	122	4.80																								
<b>DCV 50</b>	110.5	4.35	124	4.88																								
<b>DCV 80</b>	127	5.00	127.5	5.02																								
<b>DCV MG</b>	131	5.16	134.5	5.30																								
D17 (1)	Electroidraulic ON-OFF control. Voltage 24Vdc with pressure reducing valve - Pilot pressure 20 bar 290 psi	 	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>105.5</td> <td>4.15</td> <td>122</td> <td>4.80</td> </tr> <tr> <td><b>DCV 50</b></td> <td>110.5</td> <td>4.35</td> <td>124</td> <td>4.88</td> </tr> <tr> <td><b>DCV 80</b></td> <td>127</td> <td>5.00</td> <td>127.5</td> <td>5.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>131</td> <td>5.16</td> <td>134.5</td> <td>5.30</td> </tr> </tbody> </table> <p>Connector wires 30 cm Protection degree IP65 Ambient temperature -30 +60 °C Power 7 W Resistance at 20 °C 30 ohm</p>		A mm	A inch	B mm	B inch	<b>DCV 30</b>	105.5	4.15	122	4.80	<b>DCV 50</b>	110.5	4.35	124	4.88	<b>DCV 80</b>	127	5.00	127.5	5.02	<b>DCV MG</b>	131	5.16	134.5	5.30
	A mm	A inch	B mm	B inch																								
<b>DCV 30</b>	105.5	4.15	122	4.80																								
<b>DCV 50</b>	110.5	4.35	124	4.88																								
<b>DCV 80</b>	127	5.00	127.5	5.02																								
<b>DCV MG</b>	131	5.16	134.5	5.30																								
D18 (1)	Electroidraulic ON-OFF control. Voltage 24Vdc without pressure reducing valve - Pilot pressure 20 bar 290 psi	 	<table border="1"> <thead> <tr> <th></th> <th>A mm</th> <th>A inch</th> <th>B mm</th> <th>B inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>105.5</td> <td>4.15</td> <td>122</td> <td>4.80</td> </tr> <tr> <td><b>DCV 50</b></td> <td>110.5</td> <td>4.35</td> <td>124</td> <td>4.88</td> </tr> <tr> <td><b>DCV 80</b></td> <td>127</td> <td>5.00</td> <td>127.5</td> <td>5.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>131</td> <td>5.16</td> <td>134.5</td> <td>5.30</td> </tr> </tbody> </table> <p>Connector wires 30 cm Protection degree IP65 Ambient temperature -30 +60 °C Power 7 W Resistance at 20 °C 30 ohm</p>		A mm	A inch	B mm	B inch	<b>DCV 30</b>	105.5	4.15	122	4.80	<b>DCV 50</b>	110.5	4.35	124	4.88	<b>DCV 80</b>	127	5.00	127.5	5.02	<b>DCV MG</b>	131	5.16	134.5	5.30
	A mm	A inch	B mm	B inch																								
<b>DCV 30</b>	105.5	4.15	122	4.80																								
<b>DCV 50</b>	110.5	4.35	124	4.88																								
<b>DCV 80</b>	127	5.00	127.5	5.02																								
<b>DCV MG</b>	131	5.16	134.5	5.30																								

(1) Valid only for the first section

# Working sections




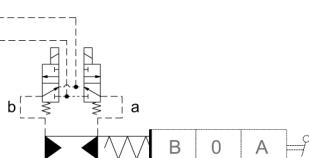

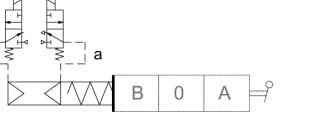
## D\*\* Spool control cap side

**	Description	Drawing																												
D19 (3)	Electrohydraulic ON-OFF control. Voltage 12Vdc - Pilot pressure 20 bar 290 psi		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>105.5</td> <td>4.15</td> <td>122</td> <td>4.80</td> </tr> <tr> <td><b>DCV 50</b></td> <td>110.5</td> <td>4.35</td> <td>124</td> <td>4.88</td> </tr> <tr> <td><b>DCV 80</b></td> <td>127</td> <td>5.00</td> <td>127.5</td> <td>5.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>131</td> <td>5.16</td> <td>134.5</td> <td>5.30</td> </tr> </tbody> </table> <p>Connector wires 30 cm Protection degree IP65 Ambient temperature -30 +60 °C Power 7 W Resistance at 20 °C 14 ohm</p>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	105.5	4.15	122	4.80	<b>DCV 50</b>	110.5	4.35	124	4.88	<b>DCV 80</b>	127	5.00	127.5	5.02	<b>DCV MG</b>	131	5.16	134.5	5.30
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	105.5	4.15	122	4.80																										
<b>DCV 50</b>	110.5	4.35	124	4.88																										
<b>DCV 80</b>	127	5.00	127.5	5.02																										
<b>DCV MG</b>	131	5.16	134.5	5.30																										
D20 (3)	Electrohydraulic ON-OFF control. Voltage 24Vdc - Pilot pressure 20 bar 290 psi		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>105.5</td> <td>4.15</td> <td>122</td> <td>4.80</td> </tr> <tr> <td><b>DCV 50</b></td> <td>110.5</td> <td>4.35</td> <td>124</td> <td>4.88</td> </tr> <tr> <td><b>DCV 80</b></td> <td>127</td> <td>5.00</td> <td>127.5</td> <td>5.02</td> </tr> <tr> <td><b>DCV MG</b></td> <td>131</td> <td>5.16</td> <td>134.5</td> <td>5.30</td> </tr> </tbody> </table> <p>Connector wires 30 cm Protection degree IP65 Ambient temperature -30 +60 °C Power 7 W Resistance at 20 °C 30 ohm</p>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	105.5	4.15	122	4.80	<b>DCV 50</b>	110.5	4.35	124	4.88	<b>DCV 80</b>	127	5.00	127.5	5.02	<b>DCV MG</b>	131	5.16	134.5	5.30
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	105.5	4.15	122	4.80																										
<b>DCV 50</b>	110.5	4.35	124	4.88																										
<b>DCV 80</b>	127	5.00	127.5	5.02																										
<b>DCV MG</b>	131	5.16	134.5	5.30																										
D21	ON-OFF electro pneumatic control. Voltage 12Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>111</td> <td>4.37</td> <td>119</td> <td>4.69</td> </tr> <tr> <td><b>DCV 50</b></td> <td>119.5</td> <td>4.70</td> <td>121</td> <td>4.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>143</td> <td>5.63</td> <td>132</td> <td>5.20</td> </tr> <tr> <td><b>DCV MG</b></td> <td>148</td> <td>5.83</td> <td>139</td> <td>5.47</td> </tr> </tbody> </table> <p>Connector DIN 43650-B ISO6952 Protection degree IP65 Ambient temperature -20 +40 °C Power 6 W</p>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	111	4.37	119	4.69	<b>DCV 50</b>	119.5	4.70	121	4.76	<b>DCV 80</b>	143	5.63	132	5.20	<b>DCV MG</b>	148	5.83	139	5.47
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	111	4.37	119	4.69																										
<b>DCV 50</b>	119.5	4.70	121	4.76																										
<b>DCV 80</b>	143	5.63	132	5.20																										
<b>DCV MG</b>	148	5.83	139	5.47																										
D22	ON-OFF electro pneumatic control. Voltage 24Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>111</td> <td>4.37</td> <td>119</td> <td>4.69</td> </tr> <tr> <td><b>DCV 50</b></td> <td>119.5</td> <td>4.70</td> <td>121</td> <td>4.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>143</td> <td>5.63</td> <td>132</td> <td>5.20</td> </tr> <tr> <td><b>DCV MG</b></td> <td>148</td> <td>5.83</td> <td>139</td> <td>5.47</td> </tr> </tbody> </table> <p>Connector DIN 43650-B ISO6952 Protection degree IP65 Ambient temperature -20 +40 °C Power 6 W</p>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	111	4.37	119	4.69	<b>DCV 50</b>	119.5	4.70	121	4.76	<b>DCV 80</b>	143	5.63	132	5.20	<b>DCV MG</b>	148	5.83	139	5.47
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	111	4.37	119	4.69																										
<b>DCV 50</b>	119.5	4.70	121	4.76																										
<b>DCV 80</b>	143	5.63	132	5.20																										
<b>DCV MG</b>	148	5.83	139	5.47																										
D23	ON-OFF electro pneumatic control. Voltage 26Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>111</td> <td>4.37</td> <td>119</td> <td>4.69</td> </tr> <tr> <td><b>DCV 50</b></td> <td>119.5</td> <td>4.70</td> <td>121</td> <td>4.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>143</td> <td>5.63</td> <td>132</td> <td>5.20</td> </tr> <tr> <td><b>DCV MG</b></td> <td>148</td> <td>5.83</td> <td>139</td> <td>5.47</td> </tr> </tbody> </table> <p>Connector DIN 43650-B ISO6952 Protection degree IP65 Ambient temperature -20 +40 °C Power 6 W</p>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	111	4.37	119	4.69	<b>DCV 50</b>	119.5	4.70	121	4.76	<b>DCV 80</b>	143	5.63	132	5.20	<b>DCV MG</b>	148	5.83	139	5.47
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	111	4.37	119	4.69																										
<b>DCV 50</b>	119.5	4.70	121	4.76																										
<b>DCV 80</b>	143	5.63	132	5.20																										
<b>DCV MG</b>	148	5.83	139	5.47																										
D24	ON-OFF electro pneumatic control. Voltage 28Vdc - Pilot pressure 5-10 bar 72.5-145 psi		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>111</td> <td>4.37</td> <td>119</td> <td>4.69</td> </tr> <tr> <td><b>DCV 50</b></td> <td>119.5</td> <td>4.70</td> <td>121</td> <td>4.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>143</td> <td>5.63</td> <td>132</td> <td>5.20</td> </tr> <tr> <td><b>DCV MG</b></td> <td>148</td> <td>5.83</td> <td>139</td> <td>5.47</td> </tr> </tbody> </table> <p>Connector DIN 43650-B ISO6952 Protection degree IP65 Ambient temperature -20 +40 °C Power 6 W</p>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	111	4.37	119	4.69	<b>DCV 50</b>	119.5	4.70	121	4.76	<b>DCV 80</b>	143	5.63	132	5.20	<b>DCV MG</b>	148	5.83	139	5.47
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	111	4.37	119	4.69																										
<b>DCV 50</b>	119.5	4.70	121	4.76																										
<b>DCV 80</b>	143	5.63	132	5.20																										
<b>DCV MG</b>	148	5.83	139	5.47																										

(3) Valid only for the section following the first one

# Working sections

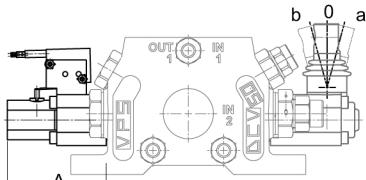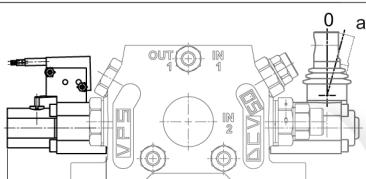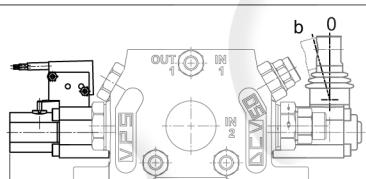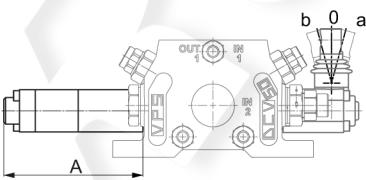
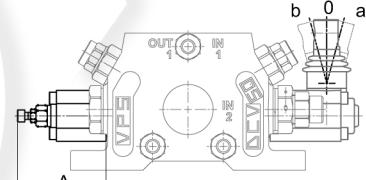
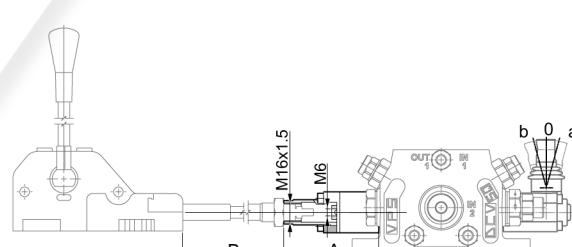
## D\*\* Spool control cap side

**	Description	Drawing																												
<b>D25 DA25 (1)</b>	Micro-switch in "a" and "b" Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th>A</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 50</b></td> <td>70</td> <td>2.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> </tr> </tbody> </table>		A	mm	inch	<b>DCV 50</b>	70	2.76	<b>DCV 80</b>	91	3.58	<b>DCV MG</b>	110	4.33														
	A																													
mm	inch																													
<b>DCV 50</b>	70	2.76																												
<b>DCV 80</b>	91	3.58																												
<b>DCV MG</b>	110	4.33																												
<b>D26 DA26 (1)</b>	Micro-switch in "a" Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th>A</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 50</b></td> <td>70</td> <td>2.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> </tr> </tbody> </table>		A	mm	inch	<b>DCV 50</b>	70	2.76	<b>DCV 80</b>	91	3.58	<b>DCV MG</b>	110	4.33														
	A																													
mm	inch																													
<b>DCV 50</b>	70	2.76																												
<b>DCV 80</b>	91	3.58																												
<b>DCV MG</b>	110	4.33																												
<b>D27 DA27 (1)</b>	Micro-switch in "b" Protection degree: IP67 Nominal rating: 0.1 ÷ 10 A / 250VAC Minimum rating: 1 mA / 4 VDC Operating temperature: -20 ÷ +85°C	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th>A</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 50</b></td> <td>70</td> <td>2.76</td> </tr> <tr> <td><b>DCV 80</b></td> <td>91</td> <td>3.58</td> </tr> <tr> <td><b>DCV MG</b></td> <td>110</td> <td>4.33</td> </tr> </tbody> </table>		A	mm	inch	<b>DCV 50</b>	70	2.76	<b>DCV 80</b>	91	3.58	<b>DCV MG</b>	110	4.33														
	A																													
mm	inch																													
<b>DCV 50</b>	70	2.76																												
<b>DCV 80</b>	91	3.58																												
<b>DCV MG</b>	110	4.33																												
<b>D29</b>	Detent with adjustable automatic hydraulic release in "a" and "b"	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th>A</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 50</b></td> <td>115</td> <td>4.52</td> </tr> <tr> <td><b>DCV 80</b></td> <td>135</td> <td>5.31</td> </tr> <tr> <td><b>DCV MG</b></td> <td>147</td> <td>5.78</td> </tr> </tbody> </table>		A	mm	inch	<b>DCV 50</b>	115	4.52	<b>DCV 80</b>	135	5.31	<b>DCV MG</b>	147	5.78														
	A																													
mm	inch																													
<b>DCV 50</b>	115	4.52																												
<b>DCV 80</b>	135	5.31																												
<b>DCV MG</b>	147	5.78																												
<b>D30 DA30 (1)</b>	Spool stroke adjustment	 Cable length: 50 cm	<table border="1"> <thead> <tr> <th></th> <th>A</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>57</td> <td>2.24</td> </tr> <tr> <td><b>DCV 50</b></td> <td>62</td> <td>2.44</td> </tr> <tr> <td><b>DCV 80</b></td> <td>77</td> <td>3.03</td> </tr> <tr> <td><b>DCV MG</b></td> <td>86</td> <td>3.39</td> </tr> </tbody> </table>		A	mm	inch	<b>DCV 30</b>	57	2.24	<b>DCV 50</b>	62	2.44	<b>DCV 80</b>	77	3.03	<b>DCV MG</b>	86	3.39											
	A																													
mm	inch																													
<b>DCV 30</b>	57	2.24																												
<b>DCV 50</b>	62	2.44																												
<b>DCV 80</b>	77	3.03																												
<b>DCV MG</b>	86	3.39																												
<b>D40</b>	Flexible cable control		<table border="1"> <thead> <tr> <th></th> <th>A</th> <th>B</th> </tr> <tr> <th>mm</th> <th>inch</th> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>81</td> <td>3.19</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV 50</b></td> <td>93</td> <td>3.66</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV 80</b></td> <td>108</td> <td>4.25</td> <td>(2)</td> <td>(2)</td> </tr> <tr> <td><b>DCV MG</b></td> <td>134</td> <td>5.28</td> <td>(2)</td> <td>(2)</td> </tr> </tbody> </table>		A	B	mm	inch	mm	inch	<b>DCV 30</b>	81	3.19	(2)	(2)	<b>DCV 50</b>	93	3.66	(2)	(2)	<b>DCV 80</b>	108	4.25	(2)	(2)	<b>DCV MG</b>	134	5.28	(2)	(2)
	A	B																												
mm	inch	mm	inch																											
<b>DCV 30</b>	81	3.19	(2)	(2)																										
<b>DCV 50</b>	93	3.66	(2)	(2)																										
<b>DCV 80</b>	108	4.25	(2)	(2)																										
<b>DCV MG</b>	134	5.28	(2)	(2)																										

(1) DA = Aluminium version (only DCV50 - DCV80)

(2) Length cable and control, contact our commercial dept

# Working sections

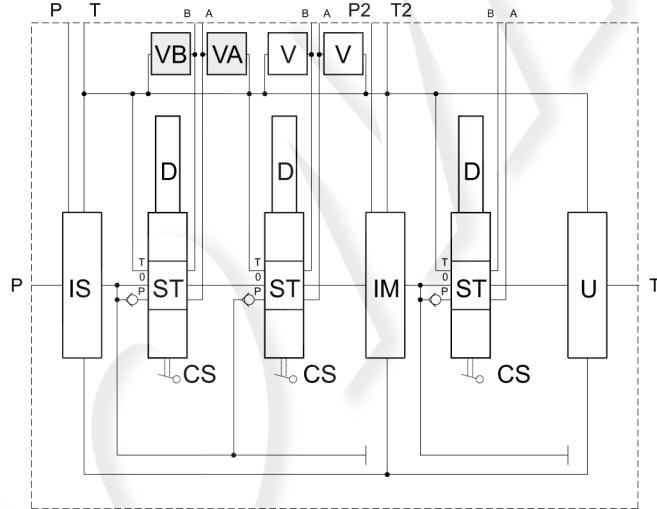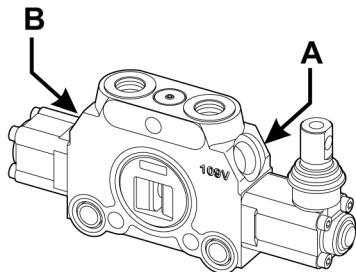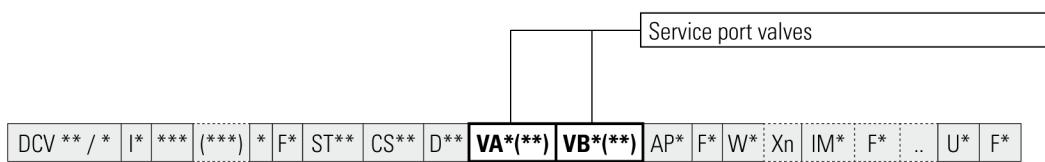

## VA\* Service port valves

<b>VA1</b> (1)	Overload valve in position "A"	
<b>VA2</b> (2)	Anti-cavitation "A" port	
<b>VA3</b> (1)	Combined valve in "A" port	
<b>VA4</b> (2)	Parranged for auxiliary valve in "A" with plug	

(1) Specificare la taratura della valvola (da 20 a 350 bar)

(2) VDV30 and DCV50, omit this field if it is not required the machining of the seat valve

<b>VB1</b> (1)	Overload valve in position "B"	
<b>VB2</b> (2)	Anti-cavitation "B" port	
<b>VB3</b> (1)	Combined valve in "B" port	
<b>VB4</b> (2)	Parranged for auxiliary valve in "B" with plug	

# Working sections

DCV \*\* / \* | I\* \*\*\* | (\*\*\*) | \* F\* ST\*\* CS\*\* D\*\* VA\*(\*\*) VB\*(\*\*) AP\* F\* W\* Xn IM\* F\* .. U\* F\*

## AP\* Circuit

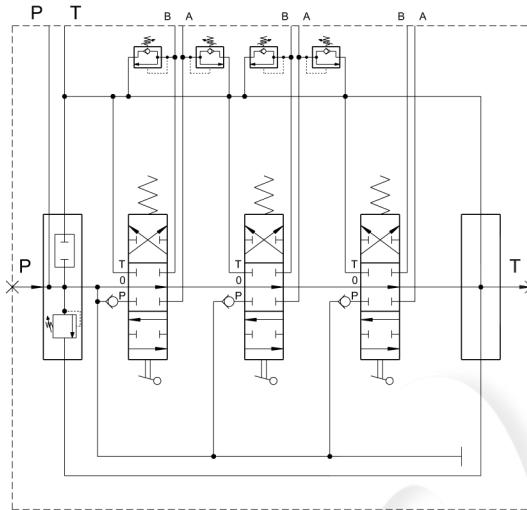
*	Description	Hydraulic circuit
AP1	<p>Parallel circuit (standard). All sections are fed in parallel. The section working with lower pressure has priority over the others; are possible simultaneous movements of two or more functions by reducing the oil flow on the others.</p>	
AP2	<p>Serie circuit (use with spool ST13 - ST14 - ST15 - ST16, see page 32). The oil returning from the actuator of the section SERIES can be used to feed the next working sections allowing the simultaneous handling of multiple sections. Working pressures of the individual sections are added together.</p>	
AP3 + AP32 + AP4 (1)	<p>Tandem circuit. It's composed of two or more working sections. The use of a first section (tandem upstream code AP3) has priority over all subsequent (if any other section upstream code AP32 or tandem downstream code AP4), preventing operation even with the spool activated.</p>	

(1) AP32 optional section.

# Working sections


Example PARALLEL circuit

AP1 (+ AP1 + AP1)




Example SERIE circuit

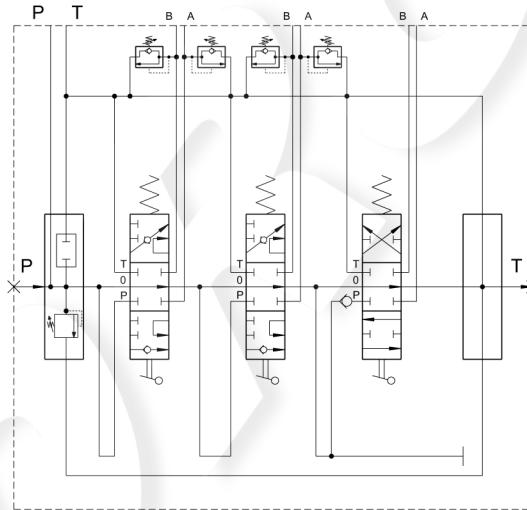AP2 (+ AP2 + AP1)




Example TANDEM circuit

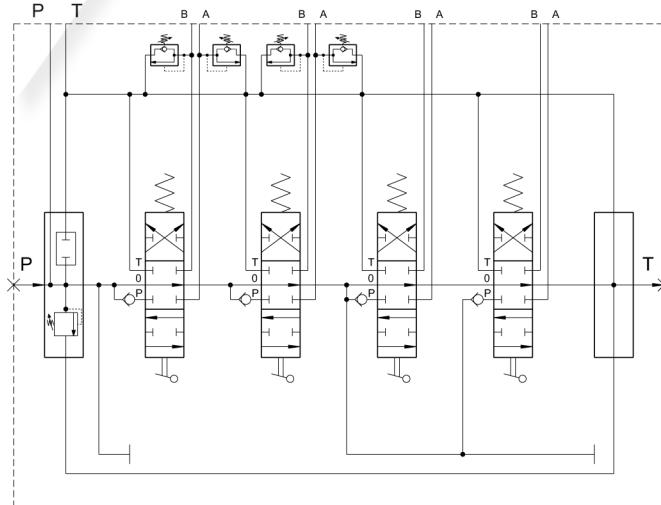AP3 + AP3\* + AP4 (+ AP1)




# Working sections

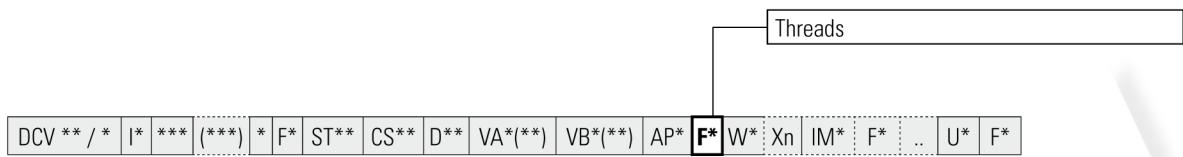

## F\* Threads

**	Description	DCV 30	DCV 50	DCV 80	DCV MG
<b>F3</b>	3/8" BSP	•			
<b>F4</b>	1/2" BSP		•	• (1)	
<b>F5</b>	3/4" BSP			•	
<b>F6</b>	1" BSP				•
<b>F31</b>	9/16"-18UNF (SAE 6)	•			
<b>F33</b>	7/8"-14UNF (SAE 10)		•	• (1)	
<b>F34</b>	1" 1/16-12UN (SAE 12)			•	
<b>F36</b>	1" 5/16-12UN (SAE 16)				•

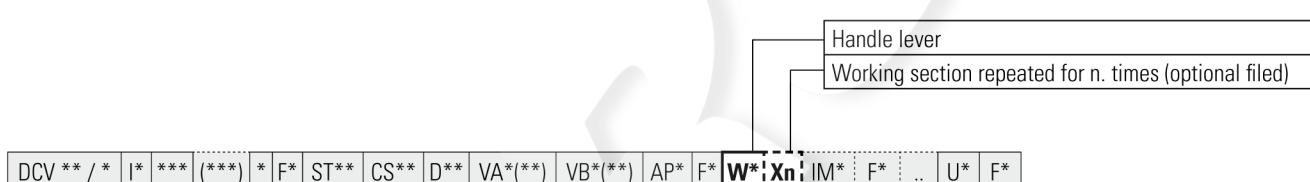
(1) Threads available on request



## W\* Handle lever

**	Description	Drawing
<b>W1</b>	Standard DCV 30 (For cloche control use W2)	<p>M8</p> <p>215</p>
<b>W2</b>	Standard DCV 50 - DCV 80	<p>M10</p> <p>215</p>
<b>W3</b>	Standard DCV MG	<p>M12</p> <p>265</p>
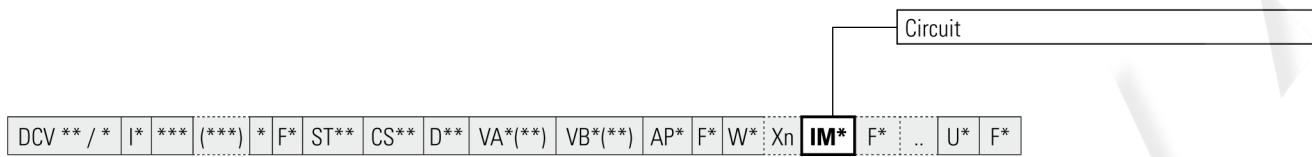
# **Intermediate section**



IM\* *Circuito*

**IME**

**Description**

**Schematic diagram**

Intermediate section (combinational valve) see page 29.

**DCV30**

**DCV80**

**DCV50**

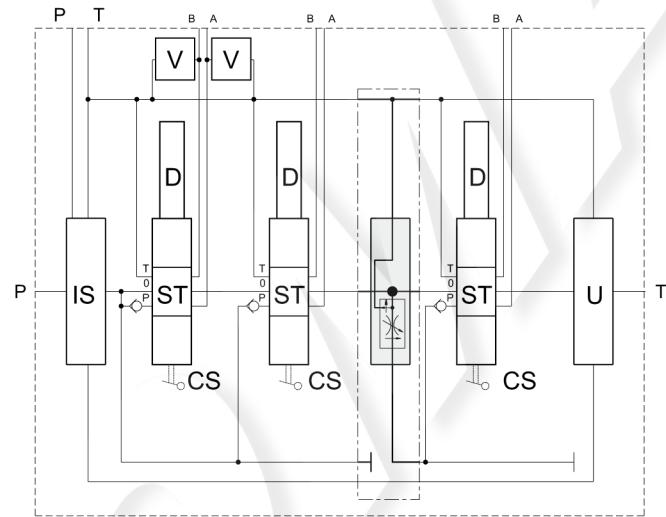
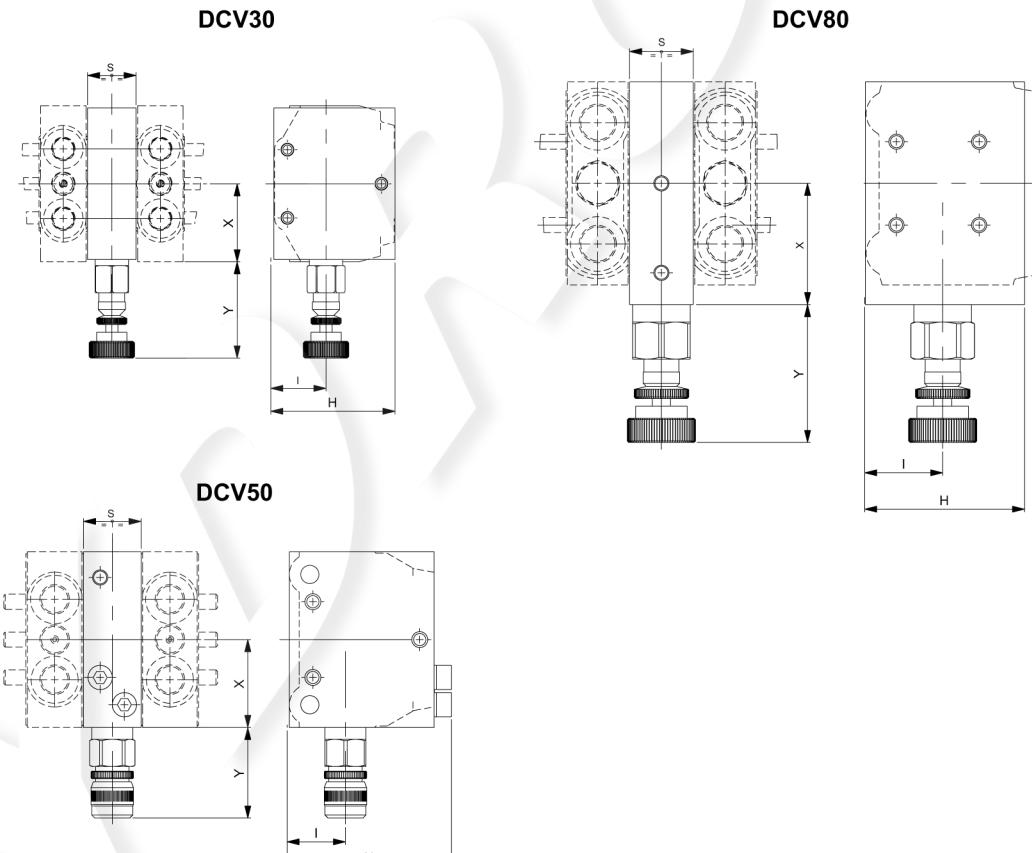
**DCVMG**

	<b>A</b> mm [inch]	<b>B</b> mm [inch]	<b>B1</b> mm [inch]	<b>C</b> mm [inch]	<b>D</b> mm [inch]	<b>E</b> mm [inch]	<b>F</b> mm [inch]	<b>G</b> min mm [inch]	<b>G</b> max mm [inch]	<b>H</b> mm [inch]
<b>DCV 30</b>	60 [2.56]	23 [0.91]	—	11 [0.43]	9.35	14 [0.55]	16 [0.63]	63 [2.48]	89.5 [3.52]	81.5 [3.21]
<b>DCV 50</b>	72 [2.83]	26.5 [1.04]	—	13 [0.51]	9 [0.35]	17 [0.67]	19 [0.75]	70 [2.76]	95.5 [3.76]	97 [3.82]
<b>DCV 80</b>	85 [3.35]	22 [0.87]	35 [1.38]	15 [0.59]	11 [0.43]	19 [0.75]	21 [0.83]	81 [3.19]	106.5 [4.19]	103 [4.06]
<b>DCVMG</b>	—	—	—	—	—	23 [0.91]	25.5 [1.00]	95 [3.74]	116.5 [4.59]	116 [4.57]

MODULAR






# Intermediate section

**MODULAR**


*	Description	Hydraulic circuit
<b>IMD</b>	<p>Adjustable flow divider, pressure compensated with exceeding flow to tank (setting and characteristics please contact our Commercial Departement)</p> 	

	X mm [inch]	Y mm [inch]	S mm [inch]	H mm [inch]	I mm [inch]
<b>DCV 30</b>	51.5 [2.03]	63.5 [2.50]	32 [1.26]	82 [3.23]	36.5 [1.44]
<b>DCV 50</b>	58 [2.28]	60 [2.35]	38 [1.5]	108.5 [4.27]	38.5 [1.52]
<b>DCV 80</b>	80 [3.15]	91 [3.58]	42 [1.65]	105.5 [4.15]	51.5 [2.03]
<b>DCV MG</b>	—	—	—	—	—

# Intermediate section

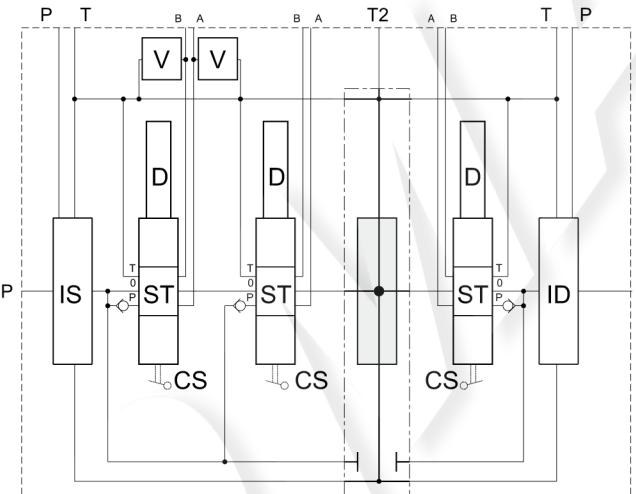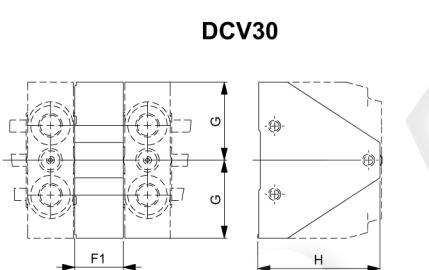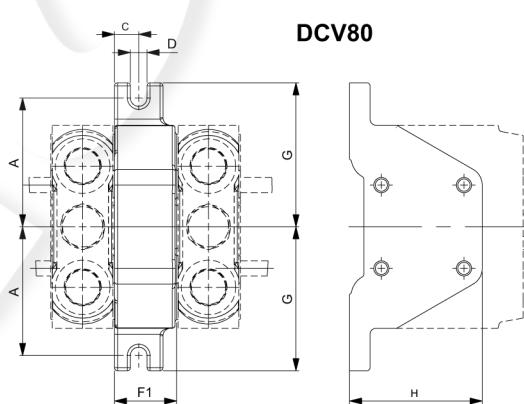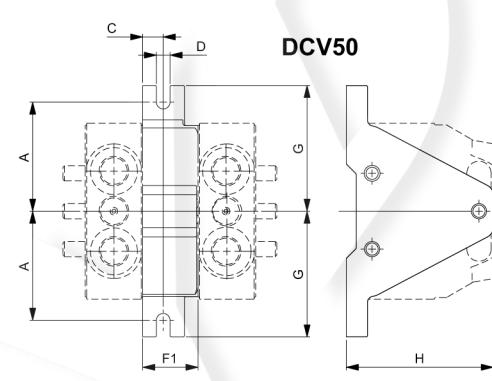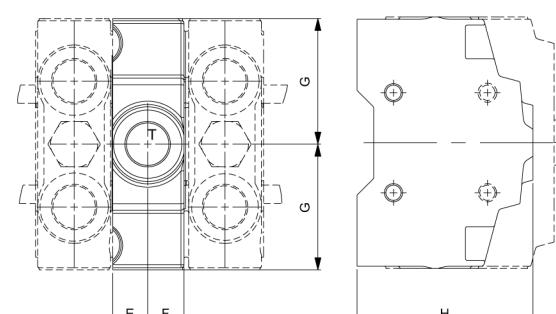*	Description	Hydraulic circuit																																													
<b>IMU</b>	Intermediate outlet section																																														
																																															
																																															
																																															
																																															
		<table border="1"> <thead> <tr> <th></th> <th><b>A</b> mm [inch]</th> <th><b>C</b> mm [inch]</th> <th><b>D</b> mm [inch]</th> <th><b>E</b> mm [inch]</th> <th><b>F</b> mm [inch]</th> <th><b>F1</b> mm [inch]</th> <th><b>G</b> mm [inch]</th> <th><b>H</b> mm [inch]</th> </tr> </thead> <tbody> <tr> <td><b>DCV 30</b></td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>32 [1.26]</td> <td>51.5 [2.03]]</td> <td>80.5 [3.17]</td> </tr> <tr> <td><b>DCV 50</b></td> <td>72 [2.83]</td> <td>13.5 [0.53]</td> <td>9 [0.35]</td> <td>17 [0.67]</td> <td>—</td> <td>36.5 [1.44]</td> <td>83 [3.27]</td> <td>97 [3.82]</td> </tr> <tr> <td><b>DCV 80</b></td> <td>85 [3.35]</td> <td>16 [0.63]</td> <td>11 [0.43]</td> <td>19 [0.75]</td> <td>—</td> <td>41 [1.61]</td> <td>95 [3.74]</td> <td>87.5 [3.44]</td> </tr> <tr> <td><b>DCVMG</b></td> <td>—</td> <td>—</td> <td>—</td> <td>23 [0.91]</td> <td>25.5 [1.00]</td> <td>—</td> <td>83 [3.27]</td> <td>116 [4.57]</td> </tr> </tbody> </table>		<b>A</b> mm [inch]	<b>C</b> mm [inch]	<b>D</b> mm [inch]	<b>E</b> mm [inch]	<b>F</b> mm [inch]	<b>F1</b> mm [inch]	<b>G</b> mm [inch]	<b>H</b> mm [inch]	<b>DCV 30</b>	—	—	—	—	—	32 [1.26]	51.5 [2.03]]	80.5 [3.17]	<b>DCV 50</b>	72 [2.83]	13.5 [0.53]	9 [0.35]	17 [0.67]	—	36.5 [1.44]	83 [3.27]	97 [3.82]	<b>DCV 80</b>	85 [3.35]	16 [0.63]	11 [0.43]	19 [0.75]	—	41 [1.61]	95 [3.74]	87.5 [3.44]	<b>DCVMG</b>	—	—	—	23 [0.91]	25.5 [1.00]	—	83 [3.27]	116 [4.57]
	<b>A</b> mm [inch]	<b>C</b> mm [inch]	<b>D</b> mm [inch]	<b>E</b> mm [inch]	<b>F</b> mm [inch]	<b>F1</b> mm [inch]	<b>G</b> mm [inch]	<b>H</b> mm [inch]																																							
<b>DCV 30</b>	—	—	—	—	—	32 [1.26]	51.5 [2.03]]	80.5 [3.17]																																							
<b>DCV 50</b>	72 [2.83]	13.5 [0.53]	9 [0.35]	17 [0.67]	—	36.5 [1.44]	83 [3.27]	97 [3.82]																																							
<b>DCV 80</b>	85 [3.35]	16 [0.63]	11 [0.43]	19 [0.75]	—	41 [1.61]	95 [3.74]	87.5 [3.44]																																							
<b>DCVMG</b>	—	—	—	23 [0.91]	25.5 [1.00]	—	83 [3.27]	116 [4.57]																																							

# Intermediate section

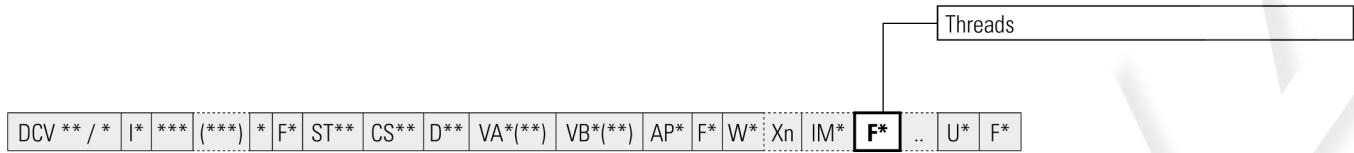

## F\* Threads for IME intermediate section

**	Description	DCV 30	DCV 50	DCV 80	DCV MG
<b>F3</b>	3/8" BSP	•			
<b>F4</b>	1/2" BSP		•	• (1)	
<b>F5</b>	3/4" BSP			•	
<b>F6</b>	1" BSP				•
<b>F31</b>	9/16"-18UNF (SAE 6)	•			
<b>F33</b>	7/8"-14UNF (SAE 10)		•	•	
<b>F36</b>	1" 5/16-12UN (SAE 16)				•

(1) Threads available on request

## F\* Threads for IMU intermediate section

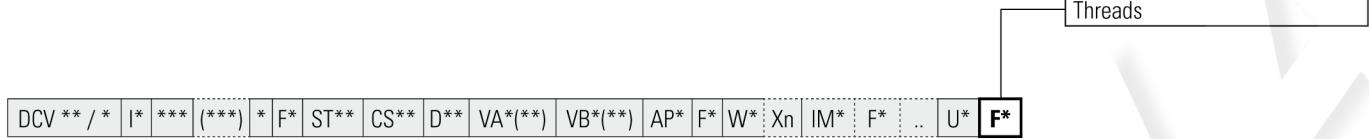
**	Description	DCV 30	DCV 50	DCV 80	DCV MG
<b>F3</b>	3/8" BSP	•			
<b>F4</b>	1/2" BSP		•	• (1)	
<b>F5</b>	3/4" BSP			•	
<b>F6</b>	1" BSP				•
<b>F31</b>	9/16"-18UNF (SAE 6)	•			
<b>F36</b>	1" 5/16-12UN (SAE 16)				•

(1) Threads available on request

# Outlet section

DCV ** / *   I* *** (***)   * F* ST** CS** D** VA*(**) VB*(**) AP* F* W* Xn IM* : F* .. <b>U*</b> F*												Outlet section
<b>U*</b> Circuit												
*	Description	Type	Hydraulic circuit									
US	Standard outlet section	DCV 30 / DCV 50										
		DCV 80										
		DCV MG										
UL	Lateral outlet section	DCV 30 / DCV 50										
		DCV 80										
		DCV MG										
UL2	HPCO outlet section	DCV 30 / DCV 50										
		DCV 80										
		DCV MG										

# Outlet section



## F\* Threads

**	Description	DCV 30	DCV 50	DCV 80	DCV MG
<b>F3</b>	3/8" BSP	•			
<b>F4</b>	1/2" BSP		•	• (1)	
<b>F5</b>	3/4" BSP			•	
<b>F6</b>	1" BSP				•
<b>F31</b>	9/16"-18UNF (SAE 6)	•			
<b>F33</b>	7/8"-14UNF (SAE 10)		•	• (1)	
<b>F34</b>	1" 1/16-12UN (SAE 12)			•	
<b>F36</b>	1" 5/16-12UN (SAE 16)				•

(1) Threads available on request