

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ


CT-9801

COIL - TUBE Ø 19


24 W

- Wire insulation class.....H (>185°C)
- ED..... 100%
- Coil power at 20° C.....24 W
- Ambient temperature.....-20 +40° C
- Weight.....0,28 Kg



ELECTRIC CIRCUITS





STANDARD





WITH DIODE
(BI-DIRECTIONAL)

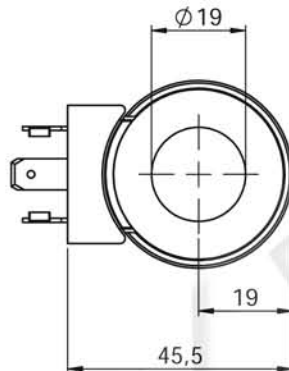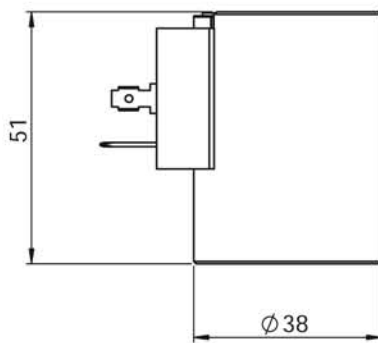

AMP - JUNIOR



DEUTSCH DT4



319

CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	6,8	STANDARD	098011190
DIN 43650	IP65*	H	24 V dc	24	STANDARD	098012190
DIN 43650	IP65*	H	26 V dc	27,1	STANDARD	098012191
DIN 43650	IP65*	H	220 V Rac**	1470	STANDARD	098016190
DEUTSCH DT 4	IP67	F	12 V dc	6,8	WITH DIODE	098111190
DEUTSCH DT 4	IP67	F	24 V dc	24	WITH DIODE	098112190
AMP - JUNIOR	IP65*	F	12 V dc	6,8	WITH DIODE	098211190
AMP - JUNIOR	IP65*	F	24 V dc	24	WITH DIODE	098212190

* Protection index with standard connector

** Rectifier not included - Power 25W