

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**


UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

FLOW CONTROLS

EC12-40 Pressure Compensator

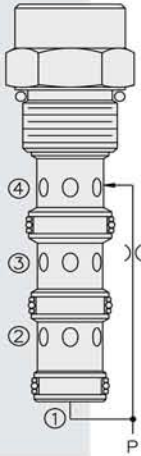

DESCRIPTION

A screw-in, cartridge-style pressure-compensating element, intended for use with a remote fixed or variable orifice to yield a three-port (bypass-type), pressure-compensated, flow regulating hydraulic valve.

OPERATION

The EC12-40 maintains a constant flow rate from ③ regardless of load pressure changes in the circuit downstream of ③.

The cartridge maintains a constant differential pressure from circuit point P to port ③ (see USASI Symbol), thereby regulating the hydraulic flow rate between the two points in the circuit. The EC12-40 is a priority type regulator, delivering pump flow first to ③, then bypassing excess to ②. All ports may be fully pressurized.

FEATURES

- Hardened parts for long life.
- Quiet, modulated response.
- Cost effective cavity.

RATINGS

Operating Pressure: 240 bar (3500 psi)

Flow Rate: 80 lpm (21 gpm) max. regulated; 120 lpm (32 gpm) max. input; 68 lpm (18 gpm) bypass.

Standard Compensator Bias Spring: 6.9 bar (100 psi)

Flow Maintenance: 7.57 to 75.7 lpm (2 to 20 gpm) settings $\pm 10\%$

Temperature: -40 to 120°C

Filtration: See page 9.010.1

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus); See Temperature and Oil Viscosity, page 9.060.1

Installation: No restrictions; See page 9.020.1


Cavity: VC12-4; See page 9.112.1

Cavity Tool: CT12-4XX; See page 8.600.1


Seal Kit: SK12-4X-MMM; See page 8.650.1

SYMBOLS


USASI/ISO:



PERFORMANCE (Cartridge Only)

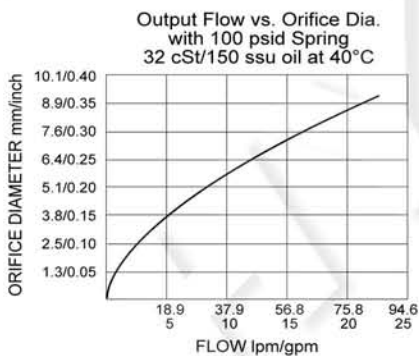

DIMENSIONS

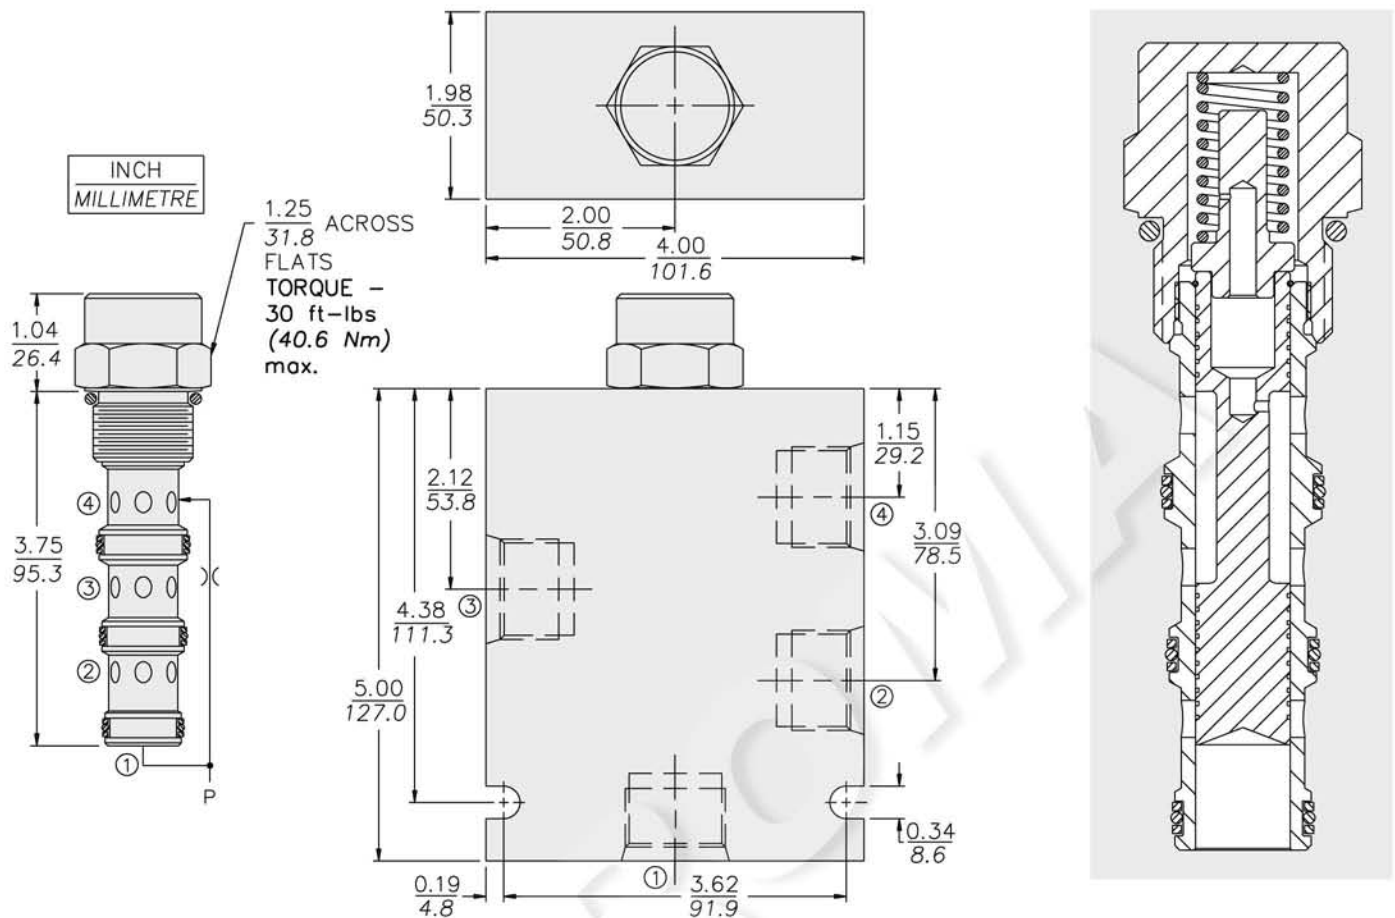

MATERIALS

Cartridge: Weight: 0.28 kg. (0.61 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and polyester elastomer back-ups standard.

Standard Ported Body: Weight: 1.50 kg. (3.30 lbs.) Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi). Ductile iron bodies available; dimensions may differ. See page 8.012.1

TO ORDER

EC12-40 -

Porting
Cartridge Only 0
SAE 10 10T
SAE 12 12T

Compensator Spring
100 6.9 bar (100 psid) standard
160 11.0 bar (160 psid)

Seals
N Buna N (Std.)
V Fluorocarbon