

Part number:

006-10016

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE



HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

**MASSIMA PRESSIONE, DIRETTE, OTTURATORE DIFFERENZIALE
DIRECT, DIFFERENTIAL PISTON RELIEF**

VSDC-150

05.12.02 - X - Y - Z

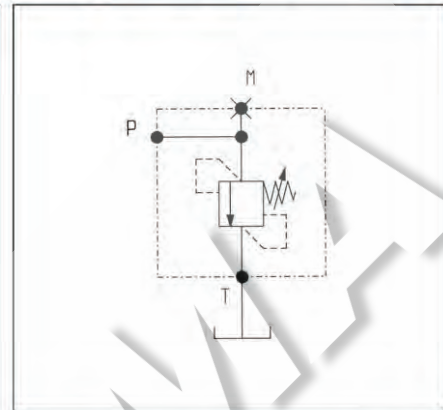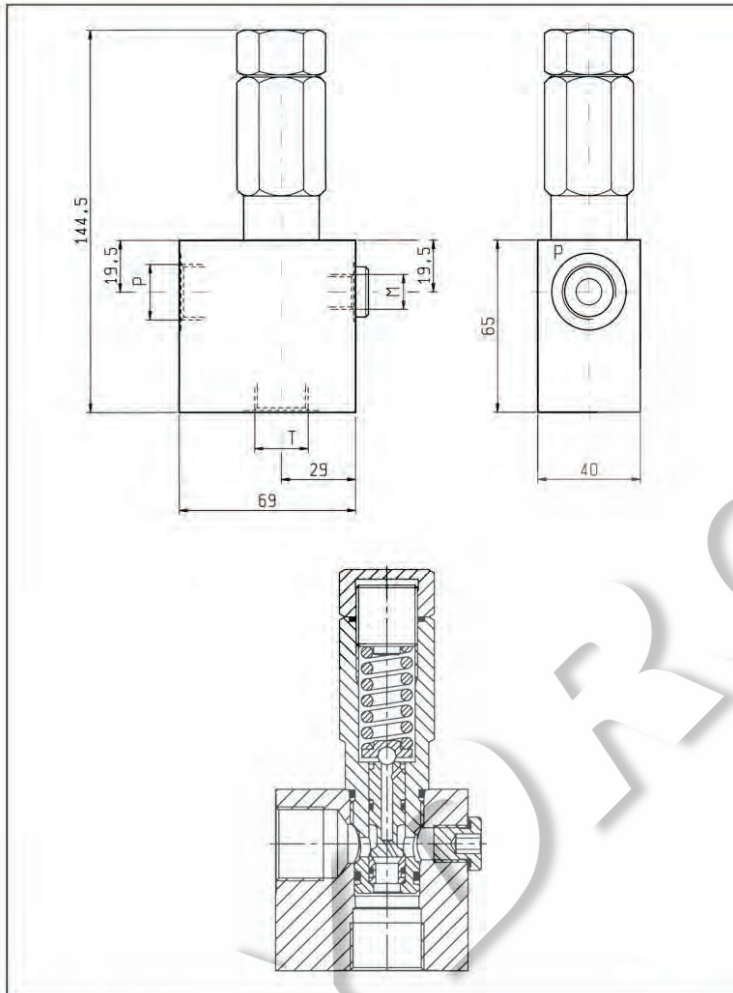


DATI TECNICI / TECHNICAL DATA


Pressione di lavoro max. 350 bar
Max. working pressure


Portata max. 150 l/min
Flow max.

Peso 0.9 kg
Weight

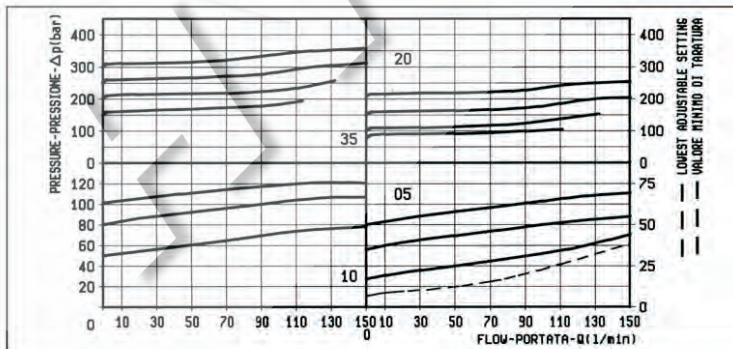

**X REGOLAZIONI
ADJUSTMENTS**

03 vite interna esagono incassato leakproof inner hex. socket screw 

cappello per piombatura sealing cap codice / ordering code 03.05.01.001 

MOLLE / SPRINGS

Z	MOLLE / SPRINGS				
	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (Q = 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
05	5-50	16	50	03.51.01.150	nero black
10	40-100	33	100	03.51.01.151	blu blue
20	70-210	68	200	03.51.01.152	verde green
35	130-350	105	350	03.51.01.142	giallo yellow

Y ATTACCHI / PORT SIZE

Y	ATTACCHI / PORT SIZE	
	P-T	M
02	G 1/2	G 1/4
03	G 3/4	G 1/4