

Part number:

009-10071

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE


HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

**VALVOLE ANTIURTO FLANGIABILI
PER MOTORI OMS OMP/OMR e OMT**

Sigla: V.A.U. OMS V.A.U. OMP/OMR e V.A.U. OMT

Materiale di costruzione: ACCIAIO
Construction material: STEEL

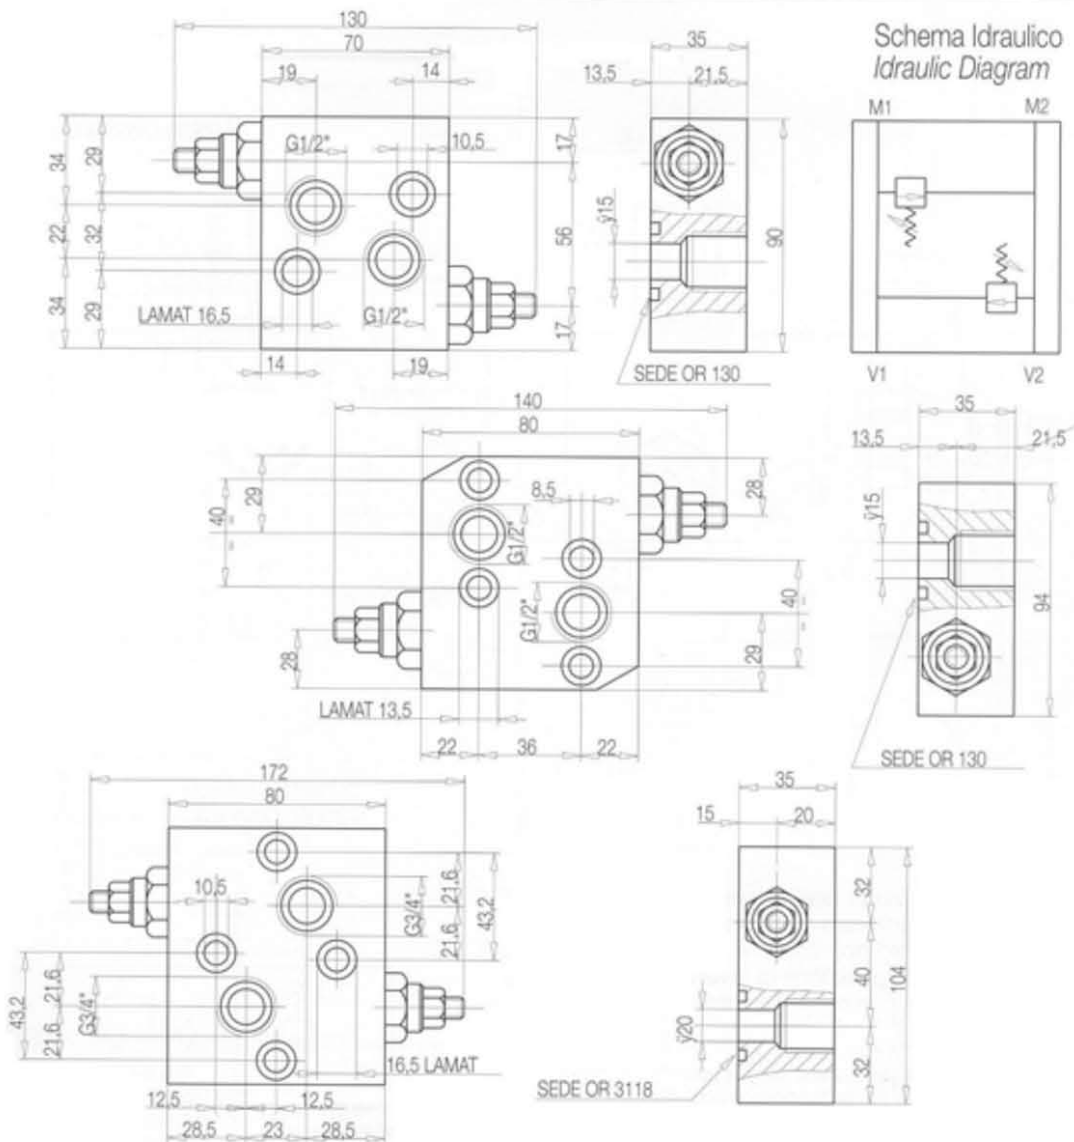

Standard valves are supplied with springs for a maximum pressure of 180 Bar. On request the springs can be supplied for the following pressures:

0-50 BAR / 20-100 BAR
50-250 BAR / 80-300 BAR

CODICE CODE	SIGLA TYPE	PORTATA MAX MAX FLOW	V1-V2
		Lt./min.	GAS
V0490	V.A.U. OMS 1/2	50	G1/2
V0500	V.A.U. OMP-OMR 1/2	60	G1/2
V0505	V.A.U. OMT 3/4	100	G3/4