

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SISTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

D FILTERING DEPUROIL


DEPUROIL

EN. Filter and transfer unit. DEPUROIL is the ideal tool for decontaminating oil by removing suspended particles. Fitted with a constantly operating volumetric pump which sends the fluid through a high-filtering capacity cartridge filter. Manometer for detecting clogged filter. Wheeled support. Noise level under 70 dB. Interchangeable cartridge filter with head. Supplied with a series of spare cartridges.

ES. Unidad de filtrado y trasiego. El DEPUROIL es un equipo ideal para descontaminar el aceite de partículas en suspensión. Dotado de bomba volumétrica, con funcionamiento continuo, que aspira el fluido enviándolo a un filtro con cartucho de elevada capacidad de filtración. Manómetro para controlar la obstrucción del filtro. Soporte sobre ruedas. Nivel de ruido inferior a 70 dB. Filtro con cartucho con parte superior intercambiable. Se suministra de serie un cartucho de repuesto.

RU. Блок для фильтрации и перекачивания. DEPUROIL представляет собой идеальное приспособление для очищения масла от взвешенных частиц. Устройство оснащено объемным насосом непрерывного действия, который всасывает жидкость, пропуская ее через патронный фильтр с высокой фильтрующей способностью. Манометр для проверки засорения фильтра. Опора с тележкой. Уровень шума ниже 70 дБ. Сменный патронный фильтр с головкой. Поставляется набор запасных фильтрующих патронов.

DIMENSIONS

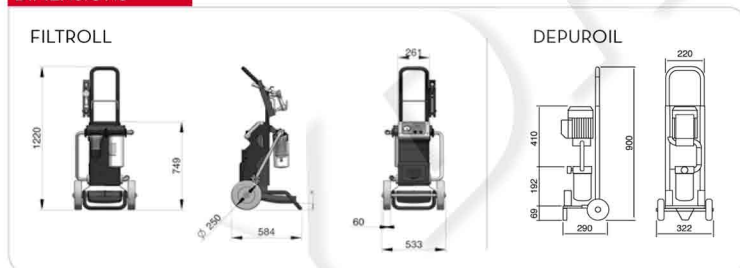

PRODUCTS' RANGE WEIGHT AND PACKAGING

| Code | Weight | | Packaging | | |
|------------------|--------|------|-------------|----------------|---------|
| | kg | lbs | mm | inch | pcs/box |
| FILTRROLL | | | | | |
| F00506000 | 35 | 77,2 | 790x590x590 | 31,1x23,2x23,2 | 1 |
| F00506010 | 42 | 92,6 | 790x590x590 | 31,1x23,2x23,2 | 1 |
| F0050606A | 40 | 88,2 | 790x590x590 | 31,1x23,2x23,2 | 1 |
| DEPUROIL | | | | | |
| 00050300A | 28 | 61,7 | 600x290x300 | 23,6x11,4x11,8 | 1 |
| F0050302C | 28 | 61,7 | 600x290x300 | 23,6x11,4x11,8 | 1 |



DEPUROIL

Flow-rate

up to
25 l/min
(up to 6,6 gpm)



DEPUROIL

FEATURES



Two step filtration

Oil/diesel version

FEATURES



Cartridge



Foot filter



Pressure Gauge

PRODUCTS' RANGE TECHNICAL DATA

| Code | Description | Fluids type | Flow-rate | | Voltage | | | Pump type | Hose lenght | | Filtering capacity μ |
|-----------------|-------------------------|-------------|-----------|----------|------------------|------------|-----------|-------------|---------------|--------------|--------------------------|
| | | | l/min | gpm | AC V./Hz DC Volt | Power Watt | Amp. max. | | delivery m/ft | suction m/ft | |
| FILTROLL | | | | | | | | | | | |
| F00506000 | Filtroll Diesel | D | 56 | 14.8 | 230/50-60 | 350/600 | 3/6 | Panther 56 | 4 / 13,1 | 3 / 9,8 | 30/5 |
| F00506010 | Filtroll Oil/Diesel | D O | 25 | 7 | 230/50 | 750 | 4,6 | Viscomat 70 | 3 / 9,8 | 3 / 9,8 | 30/5 |
| F0050606A | Filtroll 12V Diesel | D | 56 | 14.8 | 12 | 300 | 35 | Panther DC | 4 / 13,1 | 4 / 13,1 | 30/5 |
| DEPUROIL | | | | | | | | | | | |
| 00050300A | Depuroil M 230/50 | O | 20-25 | 5,28-6,6 | 230/50 | 1350 | 6,2 | Viscomat 70 | 2 / 6,5 | 2 / 6,5 | 10 |
| F0050302C | Depuroil 110/50-120/660 | O | 25 | 6,6 | 110/50-120/60 | 820/850 | 10-9 | Viscomat 70 | 2 / 6,5 | 2 / 6,5 | 10 |
| F00503100 | Depuroil 60 | | 50 | 13 | 230/50 | 1350 | 6,2 | Viscomat 90 | 2 | 2 | 10 |

FILTROLL: Available in version 230 V / 60 Hz, 120 V / 60 Hz
DEPUROIL: Upon request it is available with different voltage and 60 Hz frequency