

# SOLENOID OPERATED VALVES
# POPPET 2-WAY DOUBLE LOCK NORMALLY CLOSED
# CARTRIDGE STYLE

## VEI-8A-2T-09-NC-S-NSS — OD.15.31.17 - Y - S0


**PATENT PENDING**





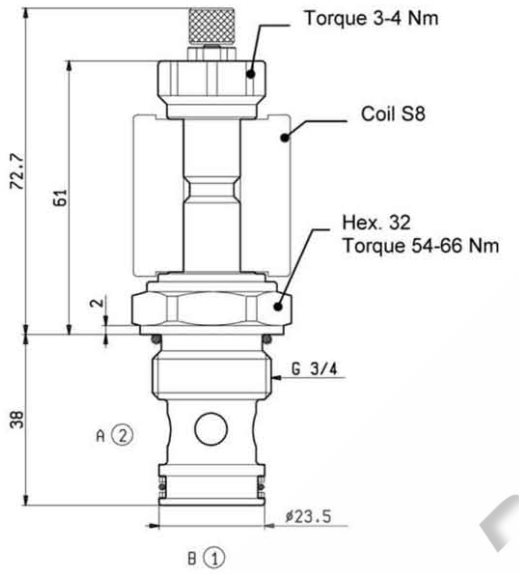




## TECHNICAL DATA
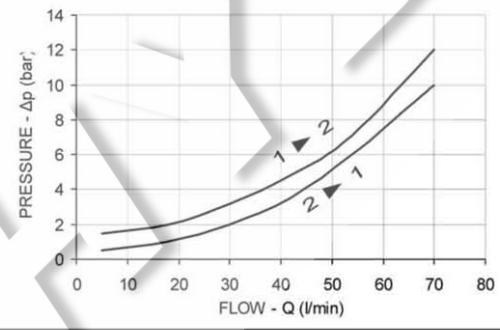
| | | |
|---|---|---|
| Maximum Operating Pressure | 350 | bar |
| Fatigue Cycle Life at 350 bar and 0.5 Hz (1 s ON - 1 s OFF) | 10 million | cycles |
| Rated Flow | 70 | l/min |
| Cavity - Tooling (017-E) | | page 7.01.100 |
| Weight | 0.220 | kg |
| Fluids - Temperatures | | page 7.01.040 |
| Testing Conditions - Seals | | page 7.01.040 |
| Internal Leakage | | page 7.01.040 |
| Filtration : 25 µm nominal or better | | page 7.01.050 |
| Minimum Voltage Required | | 90% of nominal |
| Coils must be ordered separately | | page 1.71.050 |
| Mounting Position | | unrestricted |

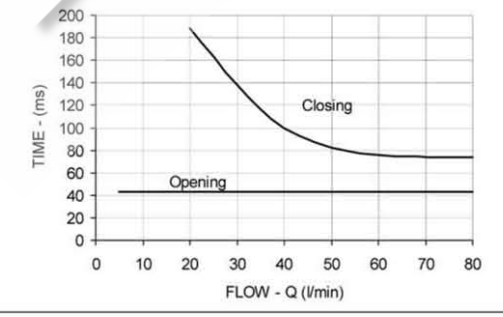


| Y | ORDERING OPTIONS | |
|---|---|---|
| 3A | Standard |  |
| 3B | Knob Style Manual Override |  |

Rev.03.04

1.13B.460.G