
TCSZF(A) - KNURLED OIL FILL PLUG WITH BREATHER AND ANTI-SPLASH DISC



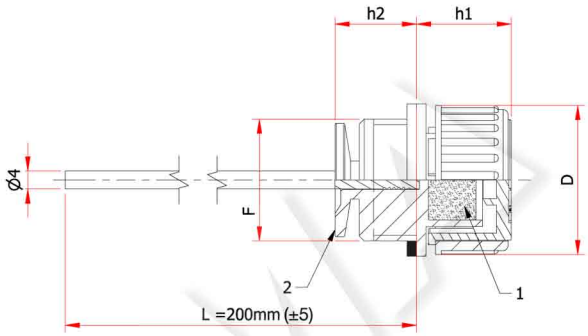

1 = Breather hole
2 = Antisplash disc

Plastic knurled head threaded filler breather ensuring high mechanical resistance at both low and high temperatures, dimensional stability and shocks resistance. Incorporated anti-splash disc, positioned under the thread, will reduce spillage when heavy oil movement in the reservoir or gearbox take place.

-**Material:** Polyamide PA66.

-**Sealing:** flat gasket NBR 90 Shore.

-**Maximum working temperature:** 100°C/212°F.

-**Filter:** polyurethane foam filter element prevents contaminations from the ambient atmosphere polluting the oil.

-**Airflow rate "P":** indicated in the table expressed in Lt/min measured at a pressure of 50 mbar/0,73 PSI.

Special versions

Level dipstick: cylindrical section with zinc steel phospated surface, standard lenght 200 mm (± 5), with customizable lenght with MIN-MAX notches.

Cod.		F	D	h1	h2	P	Pack.
TCSZF/14		G 1/4"	21,5	16	11	NR	100
TCSZF/38	TCSZF/38+A	G 3/8"	21,5	16	13	35	100
TCSZF/12	TCSZF/12+A	G 1/2"	24	11,50	14	100	100
TCSZF/34	TCSZF/34+A	G 3/4"	31	19	13,5	80	50
TCSZF/1	TCSZF/1+A	G 1"	38	16	19,5	250	50
TCSZF/14.15		M14x1,5	21,5	16	11	NR	100