

Part number:


HYDROMA HYDRAULICKÉ SYSTÉMY | HIDROMA SISTEMS UKŁADY HYDRAULICZNE | HYDROMA ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

FLOW CONTROL VALVES
COMPENSATED BOLT-TYPE IN MANIFOLD

VCDC-H-BL-C

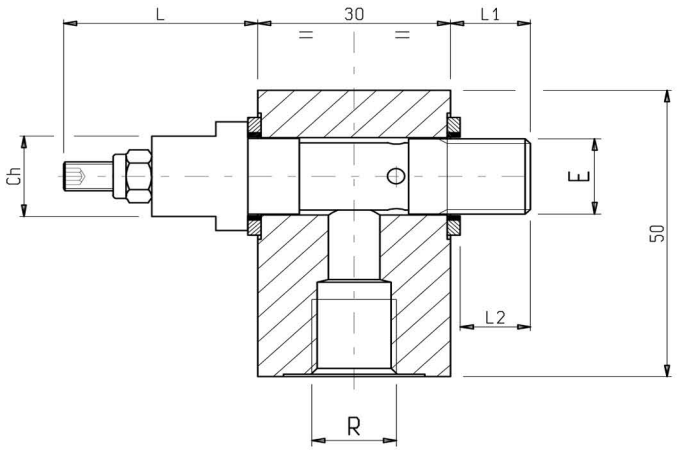

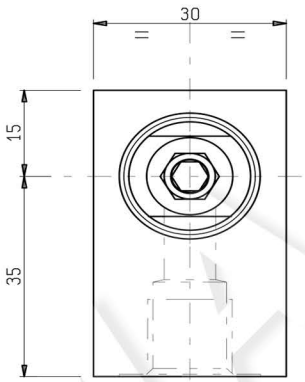

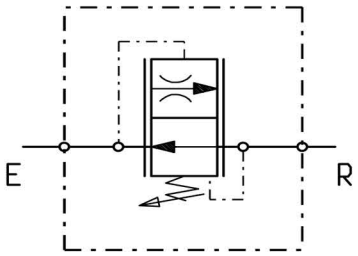

FEATURES - RATINGS

Maximum Operating Pressure **250 bar**

Rated Flow **see table**

- See sheet 3.21.15 for curves, features and functional details of VCDC-H-BL bolt-type valves.
- **IMPORTANT :** All products shown in this page are not available from stock and not included in our standard price list. Please contact our Sales Department for any information.

ORDERING CODE	PORTS E - R	Ch	L	L1	L2	FLOW MAX. l/min	Weight Kg	Valves to be inserted
OE.22.06.02.09 - Z	G 1/4	14	30.2	12.5	11	10	0.205	OD.22.06.02.09 - Z VCDC - H - 14 - BL
OE.22.06.02.02 - Z	G 3/8	17	33.6	12.5	12	25	0.170	OD.22.06.02.02 - Z VCDC - H - 38 - BL

Z	REGULATED FLOW RANGE E R l/min			
	G 1/4	G 3/8	G 1/2	G 3/4
01	/	/	/	/
02	1 - 1.6	/	/	/
03	1.6 - 2.5	2 - 10	/	/
04	2.5 - 4.0	10 - 16	/	/
05	4.0 - 6.3	16 - 25	/	/
06	6.3 - 10	/	/	/