


TECHNICAL DATA.



MATERIALS

End ring, end cap: Zinc Plated Steel  
 Inner core: Zinc Plated Steel  
 Gasket: NBR 70 Sh. A ±5

FILTER ELEMENT CHARACTERISTIC

Oil Flow. From: External / To: Internal  
 Filter Media: Fiber 12 µm  
 Filter Area: 468 cm²  
 Collapse Pressure: Min. Δp 21 bar (2,1 MPa)

TEMPERATURE (ISO 2943)


Working Temperature. From: -25 °C / To: +110 °C

COMPATIBILITY (ISO 2943)

Full with fluids: HH-HL-HM-HV-HTG (according to ISO 6743/4)

PACKING

Packaging in a single box

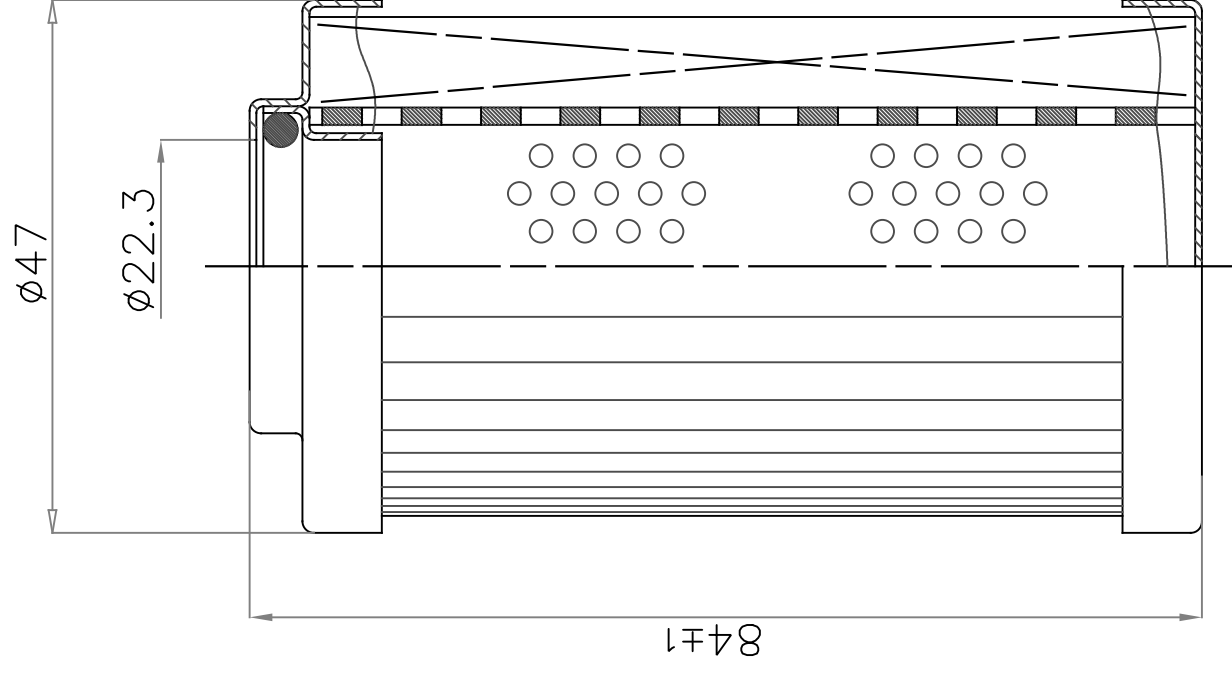

2	Modif. fondello (era 001.0420.1)	22-06-20	Belotti
1	Modif. superf. filtrante per ottimizzazione (era 579cm2) Modif. filter area for optimization (it was 579 cm2).	06/03/18	Carrara M.
Rev.	Descrizione/Description	Data/Date	App.
(Prodotto/Product)			
<i>PLANET FILTERS S.p.A.</i>			
Bolgare BG – ITALY			
(Materiale/ Material)	(Superfici/Surfaces)		
—	Disegnato Design	Data/Date	Nome/ By
	Contr. Check	22/02/18	Carrara
	Appr.	22/02/18	Belotti Zorzi
Tolleranze generali Generalized tolerance ISO 2768-mK			
(Peso) (Weight)	(Scala) (Scale)	Sostituto da: Replaced by:	
Disegno grezzo: Casting:	1.5:1	032.0011.3	SHD0060FC11
N° Disegno/Part N°			Tavola. Table.
			1/1
Sostituisce: Replaces:		SHD0060FC11	