


Part number:

TMR Temperature Switch With Integrated Relay

Technical Data

- Power Supply : 12v - 24v
- Working temperature : -4°F to 248°F
- Maximum Pressure : 2900 PSI
- Fixed Hysteresis Value : About 22°F
- Switching Accuracy : ± 7°F
- Power Supply Cord Length : 28"
- Fan Motor Cord Length : 28"
- Body Material : Brass
- Mounting : Any Position
- Weight : 0.6 lbs

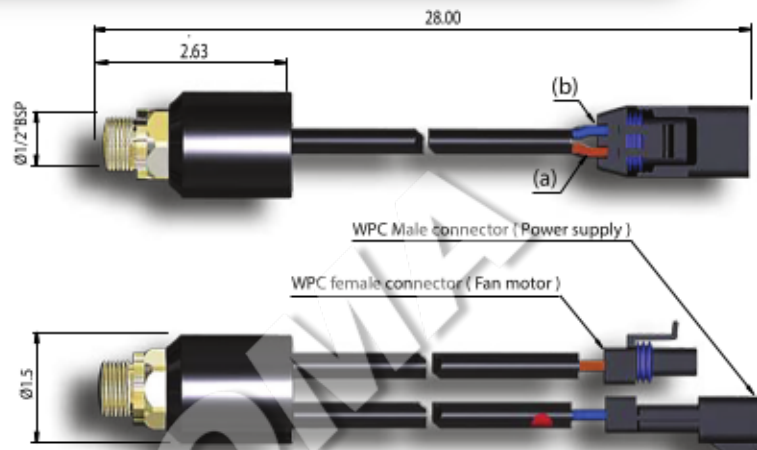

The supply includes a longer female connector for the power supply connection

Electrical Data

- Electrical Connections : Metripack 280
- Positive : (A) Brown Wire
- Negative : (B) Blue Wire
- Electrical Protection : IP 67
- Electrical Contact : Normally Open
- Approvals : CE
- Maximum Contact Load : TMR 4X 30 Amp
TMR 5X 40 Amp

Other Temperature settings Available. Consult Factory

Part Number	Temperature Range	Volts	Ordering Code (for cooler code)	Max Contact Load
TMR 45 - 12	122°F - 104°F	12	2D	30 Amp
TMR 45 - 24	122°F - 104°F	24	2E	
TMR 46 - 12	140°F - 122°F	12	3D	
TMR 46 - 24	140°F - 122°F	24	3E	
TMR 48 - 12	176°F - 154°F	12	5D	
TMR 48 - 24	176°F - 154°F	24	5E	
TMR 49 - 24	194°F - 176°F	24	6D	40 Amp
TMR 55 - 12	122°F - 104°F	12	7D	
TMR 56 - 12	140°F - 122°F	12	8D	